

FLASH FLOOD BEHAVIOUR ON A SMALL CARIBBEAN ISLAND: A COMPARISON OF TWO WATERSHEDS ON GRENADA


RAHMAT ARIS PRATOMO

[March, 2015]

SUPERVISORS:

Prof. Dr. Victor G. Jetten

Dr. Dinand Alkema

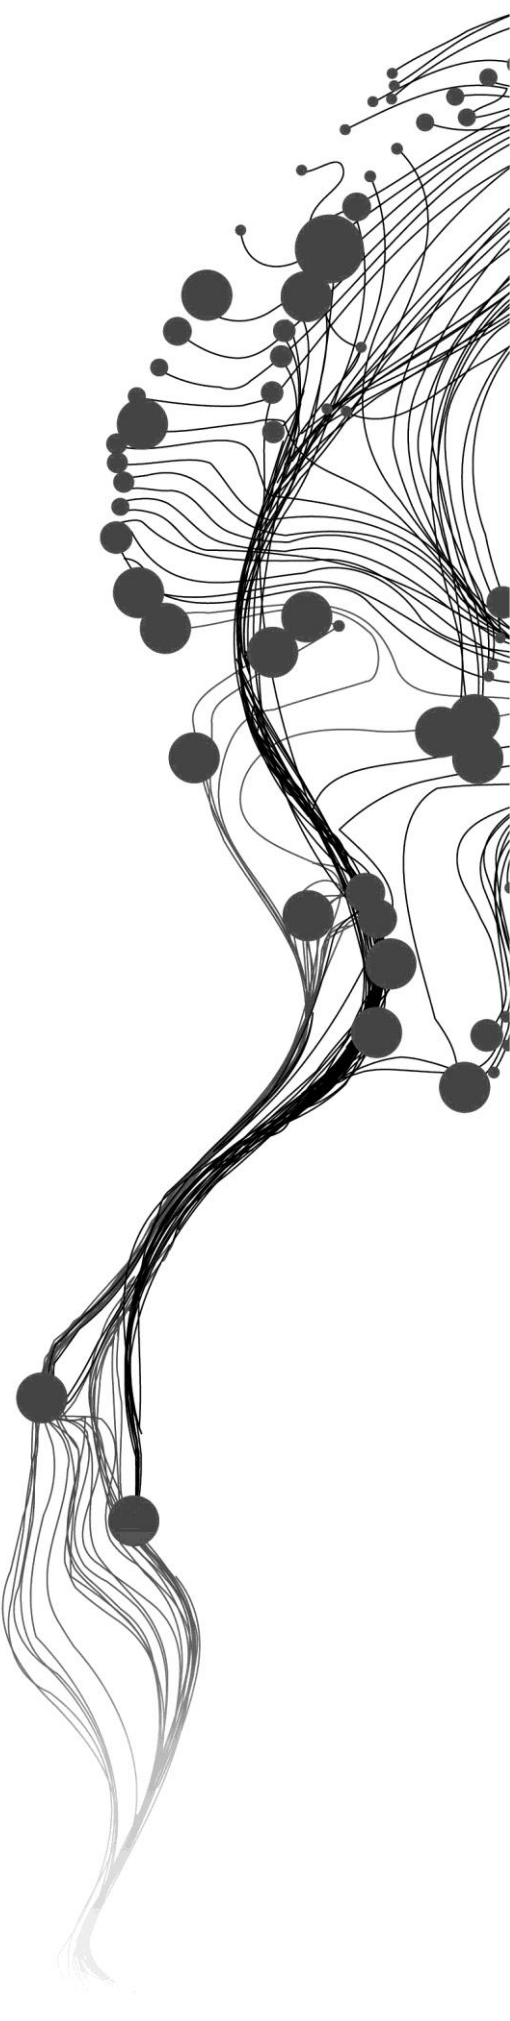

FLASH FLOOD BEHAVIOUR ON A SMALL CARIBBEAN ISLAND: A COMPARISON OF TWO WATERSHEDS ON GRENADA

RAHMAT ARIS PRATOMO

Enschede, The Netherlands, [March, 2015]

Thesis submitted to the Faculty of Geo-Information Science and Earth Observation of the University of Twente in partial fulfilment of the requirements for the degree of Master of Science in Geo-information Science and Earth Observation.

Specialization: Applied Earth Science-Natural Hazard and Disaster Risk Management

SUPERVISORS:

Prof. Dr. Victor G. Jetten

Dr. Dinand Alkema

THESIS ASSESSMENT BOARD:

Dr. Norman Kerle (Chair)

Dr. Rens van Beek (External Examiner, Utrecht University)

DISCLAIMER

This document describes work undertaken as part of a programme of study at the Faculty of Geo-Information Science and Earth Observation of the University of Twente. All views and opinions expressed therein remain the sole responsibility of the author, and do not necessarily represent those of the Faculty.

ABSTRACT

Flood assessment is very required and necessary conducting in the susceptibility flood area. However, many research have been conducted and they were only assess the flood events, it did not explain the flood characteristics. This research is developed to compare the response of flash flood behaviours in Gouyave watershed and St. John's watershed, Grenada, Caribbean Islands. Those two watersheds have different characteristics, specifically those land-use types. Approximately 23.28% St. John watershed is built-up area, whereas most of Gouyave watershed is still covered with green natural vegetations. It seems that St. George represents city or urban area in Grenada and Gouyave represents the village in Grenada that are susceptible to flood. In order to get the flood characteristics as the main abjective of this research, some tools are combined to developing this research, such as ArcGIS 10.2, ILWIS 3.3, and ERDAS Imagine 2013, and then PC raster and Open-LISEM. OpenLISEM software was used to develop and analyze the flood characteristics in two watersheds. This research started with collecting research data from fieldwork in Gouyave watershed and St. John's watershed during a month. Identifying land-use types were conducted by interpretation of satellite imagery (Pleiades). Then, soil physical measurements, that are consist of Ksat, initial soil moisture, porosity, random roughness, and manning's, were conducted during fieldwork in Construction Materials Laboratory of the Grenada Bureau of Standards. In the flood modelling, several data was used, such as DEM map, Ksat map, surface roughness map, manning's n map, and soil moisture map. In order to get the best accuracy value of flood modelling, it was conducted also sensitivity analysis with determining a certain values. The most sensitive parameters to flood model are Ksat and initial soil moisture, and also surface roughness is categorized into sensitive parameters. The model calibration and model validation was conducted in order to check the best model performance. Then, determining the rainfall intensity for different return period using Gumbel method. It was resulted five return perids, 2, 5, 10, 35, and 100 years return periods. The 2, 35, and 100 years return period was used as input data for flood model. However, the 5 and d10 years return period is onlu used to analyze the responses of two watersheds to flood events. The flood characteristics can be shown from the flood model in three different return periods (2, 35, and 100 years different period). The flood characteristics that were analyzed such as peak discharge, total discharge, total infiltration, flood depth, flood duration, flood propagation time, flood volume, and flood area in different return period. Based on the assessment, there is not occur flood event in 2 years return period because the rainfall intensity in this period is classified into low categories. In the 35 years return period and 100 years return period, the flood characteristics in St. John's watershed, such as peak discharge, flood depth, flood volume, and flood area are higher than Gouyave watershed. It is concluded that St. John's watershed is more response to flood than Gouyave watershed. The classification of flood depth in Gouyave watershed and St. John's watershed also conducted in this research and the results is five classes of flood depth. In the end of this research, it assessed the buildings exposed and the land-use types exposed that are affected to flood. In two watersheds area, the built-up area, shrub, and grass land are the highest land-use types that affected by flood.

Keywords: Carribean, flood, flood characteristics, land use, LISEM, sensitivity analysis

ACKNOWLEDGEMENTS

In the name of Allah most Generous most Merciful...

Alhamdulillah rabbil 'alamin, All praise is due to Allah to whom I am most thankful for all he has given me and my family and for the completion of this thesis.

The second, I would like to say thank to my mother, NUROYANAH, my sister to always supporting me through beautiful way "Doa"

I would also like to show my gratitude to NESO Indonesia for giving me opportunity and financial support during the MSc program.

I am very much grateful to my supervisor, Profesor Dr. Victor G. Jetten and Dr. Dinand Alkema for their valuable dedication through period of writing this thesis. I am heartily thankful for their patience in explaining many things especially about modelling and for giving very detail and critical comment for my writing. Dr. Cees van Westen and Ir. Mark Brussel for giving advice during the fieldwork in Grenada, Caribbean Island.

I am heartily thankful to Drs. Nanette Kingma for supporting me everything and everywhere. I feel like having mother here.

I would also extend my gratitude to Mr. Fabian Purchell, John St. Louis, and staff of the Grenada Bureau of Standards Laboratory for their supporting, sharing data, and knowledge during the fieldwork in Grenada.

Special thanks to CHARIM team, Mujeeb Alam, Christoffer Lundegaard, Diana Patricia Lozana Zafra, Anne Chinyere Uwakwe, Chishala Mulenga, Xsa Anacio Cabria, and Jovani Yifru for togetherness that we share during the project.

I would like to thanks all my colleagues and classmates in ITC. Thank you for all supports from all of you. I will miss you Guys!!!

Many thanks to go to Wawargita Permata who always help and give many support to me during this program.

The last but not least..

I dedicate this thesis for my lovely DAD...MOH. DIMYATI

*Rahmat Aris Pratomo
February, 2015
Room 1026 ITC Hotel
Enschede - The Netherlands*

TABLE OF CONTENTS

Abstract	i
Acknowledgements.....	ii
Table of Contents.....	iii
List of Figures.....	v
List of Tables.....	vii
List of Abbreviations.....	viii
1. INTRODUCTION.....	1
1.1. Background.....	1
1.2. Research Problem	2
1.3. Research Objectives and Questions.....	4
1.3.1. Research Objectives.....	4
1.3.2. Research Questions	4
1.4. Thesis Structures	4
2. LITERATURE REVIEW.....	6
2.1. Classification of Floods.....	6
2.2. Flash Floods and Factor Influencing Flash-Floods	7
2.2.1. Influences of physical factors to flash-floods.....	7
2.2.2. Influences of rainfall to flash-floods.....	8
2.2.3. Influences of land-use types to flash-floods.....	9
2.3. Characteristics of Flash Floods	10
2.4. Flood Modelling.....	10
2.4.1. Data preparation and assessment, according to the data requirements;.....	11
2.4.2. Formulate and build flood modelling;.....	11
2.4.4.1. Sensitivity analysis	12
2.4.4.2. Calibration	12
2.4.4.3. Validation	12
2.5. LISEM for flood modelling	13
3. RESEARCH AREA AND METHODOLOGY.....	15
3.1 Research Area.....	15
3.1.1. Location.....	15
3.1.2. Topography.....	16
3.1.3. Land-Use Characteristics	18
3.1.4. Rainfall.....	19
3.1.5. Soil Characteristics	20
3.1.6. Geology Characteristics	22
3.2 Research Framework.....	24
3.3 Data Collection.....	25
3.4 Methods.....	26
3.4.1 Software.....	26
3.4.2 Sampling Procedures	26
3.4.3 Soil physical measurements	27
3.4.4 Parameterization Method for LISEM	29

3.4.4.1	Catchment Characteristics parameter.....	30
3.4.4.2	Vegetation parameter.....	30
3.4.4.3	Green and Ampt infiltration parameter.....	31
3.4.4.4	Soil surface parameter.....	32
3.4.4.5	Overland flow and channel flow parameter.....	33
4.	PHYSICAL PARAMETERS FOR FLASH-FLOOD MODELLING	35
4.1	Land-use types in the research area	35
4.2	Soil physical properties	37
4.2.1	Analysis of soil properties in relation to land use types	37
4.2.2	Analysis of soil properties in relation to soil types.....	40
4.3	Rainfall.....	42
5.	FLOOD MODELLING	45
5.1.	LISEM Input Data	45
5.2.	Sensitivity Analysis	47
5.3.	Model Calibration and Validation.....	50
5.4.	Comparison of flood characteristics based on the difference return periods.....	53
5.5.	Analysis of watershed responses to flood in different return period.....	60
6.	FLOOD SCENARIOS.....	61
6.1.	The building exposed by flood.....	61
6.1.1.	2 years return period	61
6.1.2.	35 years return period	61
6.1.3.	100 years return period.....	63
6.2.	The land-use exposed by flood	64
6.2.1.	2 years return period	64
6.2.2.	35 years return period	64
6.2.3.	100 years return period.....	65
7.	CONCLUSIONS AND RECOMMENDATIONS.....	67
7.1.	Conclusions	67
7.2.	Limitations of research	68
7.3.	Recommendations	68

LIST OF FIGURES

Figure 1-1 (a) Flood condition in St. John's watershed, (b) Flood condition in Gouyave watershed in 2011, (c) Identified potential areas of flood propagation in St. John's watershed (Cooper & Opadeyi, 2006), and (d) Identified potential areas of flood propagation in Gouyave watershed (Westen, 2014).....	3
Figure 2-1 OpenLISEM Basic Structure.....	13
Figure 3-1 Orientation map of Gouyave watershed and St. John's watershed to 6 parish in Grenada	15
Figure 3-2 (a) Charlotte River and St. John's River and (b) Gouyave Watershed (I) and St. John's Watershed (II).....	16
Figure 3-3 (a) Satellite Imagery of Gouyave Watershed and (b) Satellite Imagery of St. John's Watershed	16
Figure 3-4 (a) Elevation Map of Gouyave Watershed and (b) Elevation Map of St. John's Watershed.....	17
Figure 3-5 (a) and (b) Built-up areas in Gouyave watershed and St. John's watershed	18
Figure 3-6 (a) Forest and (b) Mixed-trees.....	18
Figure 3-7 (a) Shrub and (b) Agriculture lands	19
Figure 3-8 The Annual Rainfall in Grenada during 1986-2014.....	20
Figure 3-9 Soil characteristics of Gouyave watershed	21
Figure 3-10 Soil characteristics of St. John's watershed.....	22
Figure 3-11 Geology characteristics of Gouyave watershed	23
Figure 3-12 Geology characteristics of St. John's watershed	23
Figure 3-13 Research Framework	24
Figure 3-14 Soil sample locations in Gouyave watershed.....	27
Figure 3-15 Soil sample locations in St. Johns watershed.....	27
Figure 3-16 Detail stages for conducting soil physical measurements.....	28
Figure 3-17 (a) Psedu laboratory method used Ksat Measurement (Alkema, 2009) and field observation and (b) Heating soil samples in oven for 24 hours to measure the porosity values.....	29
Figure 3-18 Flowchart to obtain catchment characteristics parameters	30
Figure 3-19 Flowchart to obtain vegetation parameters	31
Figure 3-20 Flowchart to obtain green and Ampt infiltration parameters.....	32
Figure 3-21 Flowchart to obtain soil surface parameters.....	33
Figure 3-22 Flowchart to obtain overland flow and channel flow	34
Figure 4-1 Land-use map of Gouyave watershed	36
Figure 4-2 Land-use map of St. John's watershed.....	36
Figure 4-3 Means of Ksat values in different land use types.....	38
Figure 4-4 Ksat boxplot (a) and porosity boxplot (b) based on land-use types	39
Figure 4-5 Means of porosity values in different land use types.....	39
Figure 4-6 Means of Ksat values in different soil textures	40
Figure 4-7 Ksat boxplot (a) and porosity boxplot (b) based on soil types.....	41
Figure 4-8 Means of porosity values in different soil types.....	42
Figure 4-9 Gumbel Distribution	43
Figure 4-10 The rainfall intensity in (a) 2 years return period; (b) 5 years return period; (c) 10 years return period; (d) 35 years return period; and (e) 100 years return period	44
Figure 5-1 (a) DEM map Gouyave watershed and (b) DEM map of St. John's watershed.....	45
Figure 5-2 (a) Ksat map Gouyave watershed and (b) Ksat map of St. John's watershed.....	45
Figure 5-3 (a) N.map Gouyave watershed and (b) N.map of St. John's watershed.....	46
Figure 5-4 (a) PER.map Gouyave watershed and (b) PER.map of St. John's watershed.....	46

Figure 5-5 (a) RR.map Gouyave watershed and (b) RR.map of St. John's watershed	46
Figure 5-6 (a) Thetai1.map Gouyave watershed and (b) Thetai1.map of St. John's watershed	47
Figure 5-7 The sensitivity level of parameters to peak discharge	48
Figure 5-8 The sensitivity level of parameters to total discharge (a) and total infiltration (b)	49
Figure 5-9 The sensitivity level of parameters to flood depth max.....	49
Figure 5-10 Simulated discharge of Gouyave watershed and St. John's watershed in 2 years return period	54
Figure 5-11 Simulated discharge of Gouyave watershed and St. John's watershed in 35 years return period	54
Figure 5-12 Simulated discharge of Gouyave watershed and St. John's watershed in 100 years return period.....	55
Figure 5-13 Flood depth in Gouyave watershed at 35 years return period	56
Figure 5-14 Flood depth in St. John's watershed at 35 years of return period	56
Figure 5-15 Flood depth in Gouyave watershed at 100 years return period	56
Figure 5-16 Flood depth in St. John's watershed at 100 years return period	57
Figure 5-17 Flood propagation time Gouyave watershed at 35 years of return period*.....	57
Figure 5-18 Flood propagation time in St. John's watershed at 35 years return period*	57
Figure 5-19 Flood propagation time Gouyave watershed at 100 years of return period*.....	58
Figure 5-20 Flood propagation time in St. John's watershed at 100 years return period*	58
Figure 5-21 Flood duration time in Gouyave watershed at 35 years of return period*.....	58
Figure 5-22 Flood duration time in St. John's watershed at 35 years return period*.....	59
Figure 5-23 Flood duration time in Gouyave watershed at 100 years of return period*	59
Figure 5-24 duration time in St. John's watershed at 100 years return period*	59
Figure 6-1 The exposure buildings of Gouyave watershed and St. John's watershed per each flood depth level in 35 years return period	62
Figure 6-2 Flood depth in Gouyave watershed in 35 years return period	62
Figure 6-3 Flood depth in St. John's watershed in 35 years return period	62
Figure 6-4 The exposure buildings of Gouyave watershed and St. John's watershed per each flood depth level in 100 years return period	63
Figure 6-5 Flood depth in Gouyave watershed in 100 years return period	64
Figure 6-6 Flood depth in St. John's watershed in 100 years return period	64
Figure 6-7 The comparison of land-use types exposed by flood in Gouyave watershed (a)	66

LIST OF TABLES

Table 2-1 Flash-Flood Hazard Categories.....	10
Table 3-1 Slope Categories in St. John Watershed and Gouyave Watershed.....	17
Table 3-2 Maximum Daily Rainfall and Annual Rainfall (mm) during 1986-2014.....	19
Table 3-3 Soil textures of Gouyave watershed	20
Table 3-4 Soil textures of St. John's watershed	21
Table 3-5 Geology Characteristics of Gouyave watershed.....	22
Table 3-6 Geology Characteristics of St. John's watershed.....	22
Table 3-7 Data Collection before Fieldwork.....	25
Table 3-8 Data Used in the Research from Fieldwork.....	25
Table 3-9 Number of soil samples number based on land-use types	26
Table 3-10 Input parameters for flood modelling with LISEM	29
Table 3-11 Values of Vegetation Fraction Percentage and Vegetation Height.....	31
Table 3-12 Values of Leaf Area Index	31
Table 3-13 Manning's Coefficient Values.....	32
Table 3-14 Random Roughness Values	33
Table 4-1 Land-use in Gouyave Watershed	35
Table 4-2 Land-use in St. John's Watershed	35
Table 4-3 Overall Accuracy of Land-use in Gouyave watershed	37
Table 4-4 Overall Accuracy of Land-use in St. John's watershed	37
Table 4-5 Means and Standard Deviation of Ksat and Porosity for Difference Land Use Types.....	38
Table 4-6 Mean and Standard Deviation of Ksat and Porosity for Difference Soil Types	40
Table 4-7 Return Periods and Maximum Daily Rainfall	43
Table 5-1 Results of Sensitivity Analysis.....	48
Table 5-2 Flood depth points and locations in Gouyave watershed and St. John's watershed.....	51
Table 5-3 Result of Model Calibration.....	51
Table 5-4 Result of Model Calibration using Bias and RMSE	52
Table 5-5 Result of Model Validation using BIAS and RMSE	52
Table 5-6 Comparison of flood characteristics in Gouyave watershed and St. John's watershed	53
Table 5-7 Classification of flood, flood extents and flood volume in 35 years return period	60
Table 6-1 The number of buildings exposed by flood in 35 years return period.....	61
Table 6-2 The number of buildings exposed by flood in 100 years return period	63
Table 6-3 The land-use types exposed by flood in Gouyave watershed (35 years return period).....	65
Table 6-4 The land-use types exposed by flood in St. John's watershed (35 years return period).....	65
Table 6-5 The land-use types exposed by flood in Gouyave watershed (100 years return period).....	65
Table 6-6 The land-use types exposed by flood in St. John's watershed (100 years return period).....	66

LIST OF ABBREVIATIONS

DEM	: Digital Elevation Model
ILWIS	: Integrated Land and Water Information System
LAI	: Leaf Area Index
LDD	: Local Drain Direction
LISEM	: Limburg Soil Erosion Model
RMSE	: Root Mean Square Error

1. INTRODUCTION

1.1. Background

Flood is the most frequent natural hazards worldwide. More than fifty percent of the total population in the world is living in low lands near the rivers and coasts that are highly exposed to flood (Mhonda, 2013). Generally, flood is the abnormal rise of the water level of a stream that may result in the overflow of the normal level of the stream with the subsequent inundation of areas that are not normally being submerged (Wigati, 2008). The flood impact does not only occur locally, but may also affect the whole area of river basin. The characteristics of flood depend on the geophysical and climatology conditions of an area (Islam, 2012).

Flood can be categorized into two types, namely coastal flooding and river flooding, based on the location where it occur (Carby, 2011). Coastal flooding is a result of fluctuations in surge and wave setup, whereas river flooding is generated by excesses in river discharge, often due to intense rainfall or manipulation of river flow control structures (Carrasco, A. Ferreira, O. Matias, A. & Freire, P., 2012). A local river flooding that occur suddenly with great volume and short duration following less than six hours of heavy rainfall, often from severe thunderstorms or due to dam or levee failure is called a flash flood (APFM, 2007a).

There are other factors that trigger the occurrence of flash floods. These are topography, soil conditions, and coverage of terrain. The topography conditions, like high-lands, the steep cliffs, and narrow valleys can increase the possibility of flash flood occurrence. Furthermore, saturated soil and impermeable and shallow geological layers can increase the surface run-off (APFM, 2007b). Several natural hazards such as landslides and melting glacier can also lead to flash flood.

Grenada is a part of Eastern Caribbean region. It is located between The Caribbean Sea and The North Atlantic Ocean (Bueno, R. Herzfeld, C. Stanton, E. A. & Ackerman, F., 2008). Annually the rainy season begins in June and ends until November. The average of annual rainfall in Grenada is 2350 mm/year in 2011 (Mecometer, 2014). Most of flood events are caused by local heavy rainfall, such as the latest event in 2011 that hit Grenada. Flood occurred in some locations in Grenada and one of the affected areas was in Gouyave watershed. Flood event in 2011 was influenced by hurricane Ophelia. The Grenada's local governments explained that several flood events in 2011 occurred in Grenada. Because of these considerations, flood event in 2011 are used as event base for flood modeling.

Some of the highest intensity rainfall are also delivered by tropical storms and hurricanes that can hit the population lives, its properties, and their livelihoods (Bueno, R. Herzfeld, C. Stanton, E. A. & Ackerman, F., 2008). Historically, in the beginning of the 20th century until 2004, Grenada had been hit by one unnamed storm in 1921, Hurricane Janet in 1955 and Hurricane Flora in 1963. After 50 years, in 2004 and 2005, Hurricane Ivan and Hurricane Emily (classified as category 3 and category 2) hit in Grenada (GFDRR, 2010). Ivan was the worst hurricane that has been struck the island since Hurricane Janet in 1955. At least 80 percent of the population was affected and more than 14,000 building damaged (Stewart, 2005). The latest hurricane in 2013 also caused flood in some flood-prone areas. However, the flood events in 2013 did not give great damages to Grenada's area, like flood events in 2011. Because Grenada is often hit by these hurricanes, Grenada area and surroundings is called "the hurricane belt".

Related with regional development, the impact of flash floods is affected to the development of Grenada's area as a tourism destination. The development of tourism activities and infrastructures will be obstructed, are caused by the Grenada's susceptibility to flood. The climatic conditions and geomorphology characteristic in the Grenada region are influenced also flood event and it make Grenada's areas are susceptible to flood. It means that flood assessment is required to conduct Grenada region, specifically in

the urban centers and the downstream areas, as susceptibility areas to flood. The understanding of overall flood characteristics in Grenada is important to support and develop the Grenada's **the disaster risk reduction strategies** to reduce the flash-floods impacts, specifically focus in the regional planning and infrastructures.

1.2. Research Problem

Niles (2010) and GFDRR (2010) declared that there are some locations in Grenada that have high susceptibility to flood. Susceptibility refers to locations or where the hazard events are probably occur which are determined from local terrain conditions (Santangelo, N., Sanro, A., et al, 2011). The combination of the high amount of rainfall, steep slopes, and rolling hills with low porosity of soil contributes to high run-off rapidly causing floods downstream. The land use development means land use conversions which are changed the green area or natural land-use to built-up area affected to the increasing of impermeability of this land-use. The impermeability is also influenced to the rate of infiltration rates. It seems that the developed area or built-up area has low infiltration rates. It refers that the land use conversions change the soil impermeability and it decrease the rate of infiltration. So, the rate of soil infiltration also triggers the increasing flash-flood events in Grenada (Niles, 2010).

St. George is the biggest city and also the capital city of Grenada. Approximately 36% of the population in Grenada lives in St. George. Other villages in Grenada are Gouyave, Grenville, Victoria Sauteurs, and Hillsborough/Carriacou. St. George, Gouyave, and Grenville are areas where a part of population is at risk to flood (CCA, 1991). CCA (1991) records that there are 6 divisions in Grenada that have high susceptibility of flood and only St. David has a low probability of flood.

This research is focused on the assessment and comparison of flood characteristics in two different watershed areas. Those two areas are chosen to represent different watershed characteristics. Gouyave represents rural area in Grenada and St. George represents urban area in Grenada. Approximately 5,33% of Gouyave watershed area is built-up areas. It is different with St. John watershed that has 23,28% built-up areas. Some upperpart areas of St. John's watershed have become developed areas, whereas most of the upperparts of Gouyave watershed are still forested. Both of them are susceptible to flood (CCA, 1991). The increasing of flash flood events in Grenada and its impacts are caused by the high intensity of land-use conversions in Gouyave watershed and St. John's watershed. (Niles, 2010). The changes in land-use types increase the soil impermeability and decrease the rate of soil infiltration. Besides from the effects of land use conversions, these two watersheds have highly intensity in the monthly rainfall average. CEHI (2006) reported that the rainfall in Gouyave watershed during rainy season (Jun-Nov) is 250-350 mm, whereas the rainfall in St. John watershed at same period is 150-250 mm.

In Grenada, flood events often occur in two areas, St. George city in the St. John's watershed area and Gouyave town in the Gouyave watershed are. Flash-flood events in St. George occurred in the downstream of St. John River, while flash-flood events in Gouyave town also often occurred in the downstream parts of Charlotte River. The flash flood that occurred in Gouyave Watershed and St. John's Watershed can be characterized into two types based on its location. (1) The flash flood in upper-parts flow along the river to downstream with high velocity as influenced by the high river gradient. (2) In the lower-parts, the flood water overflow from the river and it spread to areas surrounding the river. It is influenced by the change in gradient from steep to flat in river. The Grenada locations which are pointed out the flood conditions and flood susceptibility area of Gouyave watershed and St. John's watershed, are shown in **Figure 1-1.a, b, c and d.**



Figure 1-1 (a) Flood condition in St. John's watershed, (b) Flood condition in Gouyave watershed in 2011, (c) Identified potential areas of flood propagation in St. John's watershed (Cooper & Opadeyi, 2006), and (d) Identified potential areas of flood propagation in Gouyave watershed (Westen, 2014)

Until this period, some relevant studies and reports have been done for Grenada, including (1) Cooper & Opadeyi (2006), who explained the flood map in national and local scale (St. George). That research only explained the flood areas in the downstream of St. John River. (2) A report prepared by (CDERA, 2003) identified the susceptibility-areas of flood events and recommended mitigation actions in Grenada. The assessment of flash flood behaviors/characteristics is very limited. The previous studies of flood assessment in Grenada did not explain clearly about the flash-flood characteristics and these impacts in the flood susceptibility area of Grenada, such as the lower-parts of Gouyave watershed and St. John's watershed.

Based on these considerations, it is required and important to conduct a research that fills this information gap. This new research will analyze and compare flood characteristics in Gouyave watershed and St. John's watershed that will be generated from flood modelling. In order to analyze the flash-floods characteristics in Gouyave watershed and St. John's watershed, it is required to use open LISEM software. OpenLISEM software is a tool that can support this analysis and develop flood modelling. Thus, it can be generated the flood characteristics and determine the numbers of exposure buildings and land-use types by flood.

1.3. Research Objectives and Questions

1.3.1. Research Objectives

The main objective of this research is to compare the response of flash flood behaviors in Gouyave watershed and St. John's watershed, Grenada. It is emphasized on better understanding urbanization as an important factor related to flood hazard. In order to achieve the main objective of this research, the following sub-objectives will be addressed:

1. To characterize the physical parameters (land-use and soil properties) for flash flood generation in Gouyave watershed and St. John's watershed;
2. To determine the frequency and magnitude of rainfall based on recorded daily totals and create design events for a series of return periods;
3. To assess the sensitivity of parameters on the LISEM flood model, and choose a set of calibration parameters based on a best fit against stakeholder based observed water depth (2011);
4. To compare the flood characteristics for different returns in Gouyave watershed and St. John's watershed;
5. To assess the exposure buildings and land use types to flood based on different return periods in Gouyave watershed and St. John's watershed.

1.3.2. Research Questions

The research questions are formulated based on some sub-objectives presented above.

Specific objective 1:

1. What are the land use types and soil types of Gouyave watershed and St. John's watershed?
2. How can soil properties measured in the field best be related to land use or soil types?

Specific objective 2:

1. What are daily maximum value for given return periods?
2. How do we generate a design events corresponding to these daily maxima?

Specific objective 3:

1. Which parameters have the most influence to flood modelling?
2. Do the flood models represent the 2011 flood event?

Specific objective 4:

1. What are the characteristics of flash-floods in different return periods?

Specific objective 5:

1. Which types of land use which are exposed by flood in the Gouyave watershed and St. John's watershed?
2. How many buildings are exposed by flood in the Gouyave watershed and St. John's watershed?

1.4. Thesis Structures

This thesis consists of seven chapters:

Chapter one identifies the research background, research problem that should be answered in this study, research objectives and questions.

Chapter two consists of summary and synthesis of literature reviews that are used as theoretical background for strengthening the research components. This chapter is divided into five main topics. They are classification of floods, factor influencing floods, characteristics of flash flood, flood modelling, and LISEM for flood modelling.

Chapter three contains the methods of this research. It is explained the research procedures and implementation, description of research area, data sources and data collecting methods, and also types and tools of analysis in this research.

Chapter four explained the physical parameters which are influenced to flood model, such as DEM, Ksat maps, initial moisture maps, surface roughness maps, and random roughness.

Chapter five shows the flood modelling in the event base (year 2011 of flood event). This chapter is divided into 4 parts: LISEM input data, sensitivity analysis, model calibration, and model validation. This chapter also compares the flash-floods characteristics in Gouyave watershed and St. John's watershed based on three return periods.

Chapter six explains the numbers of exposure buildings and land-use types that are affected by flood based on three return periods. This chapter also informs the classification of flood depth in Gouyave watershed and St. John's watershed.

In the end, **chapter seven** is explained the research conclusions, recommendations, and limitations of this research.

2. LITERATURE REVIEW

2.1. Classification of Floods

Flood is a natural phenomenon which is defined as an overflow of water into lands that are used or are usable by human and are not normally covered by water (Mandych, 2009). The common characteristics of flood are the temporary nature of the inundation of lands by a river, stream, lake, or ocean. In addition, floods usually occur in short-term or seasonal events in the particular areas. Generally, floods are caused by two major factors, such as physical conditions and geographic conditions. The physical conditions mean change and interaction in the lithosphere, atmosphere, or hydrosphere. Then, the geographic causes refer to human activities and interventions or inappropriate planning and development. Moreover, the climatic factors, such as the extreme temperature changes and the extreme rainfall intensity, as impacts of climate change, are also influenced to flood events. In fact, the high intensity of rainfall becomes the most influence factor that causes flash-flood events.

Based on some respective causes, floods can be classified into 4 types (Dhar, O.N. & Nandargi, S, 2003). Those types are:

- a. Seasonal floods, floods that usually occur in a particular season, like a rainy season. It is triggered by high intensity of rainfall in certain areas.
- b. Flash floods, single flood events that occur suddenly in hilly or mountainous watersheds and hit into river channels. It has high velocity and can destroy infrastructures. It usually happens with rapid cresting with very short warning time.
- c. Glacier melting. It is characterized by melting waters from glacier after the last of ice age and now, it is as an impact of global warming. The higher temperature in the earth surface makes the intensity of glacier melting higher. Sea level rise due to the increasing of sea water is not considered as hazards because it occurs in the long time period (Westen, C.J., et al, 2011). Glacier melting is affected to the increasing of water volume in the ocean and flow into low-lying areas. However, the intensity of glacier melting enhances the volume of sea water is a normal situation.
- d. Storm surges/tidal waves. It is defined as water that is pushed up into dry-land by onshore winds (Juan, Li and Chen Yong, 2014). It only occurs near the coast or estuaries and it is influenced by wind conditions. Besides that, the storm surges or tidal wave is also influenced by land use conversions and climate change effects. The increasing of population growth and human activities make a widespread conversion of natural landscape into settlements, urban centers, or tourist resort. The changes in coastal area from natural landscape to artificial landscape affect to the decreasing of coastal ability in reducing the rate of tidal waves. Moreover, the climate change effects which are composed by temperature anomalies and sea-level pressure gradients influence to wind patterns and storm (Nicholls, R.J. & Wong, P. , 2007). The very high speed of wind, storm intensity, and storm frequency enhance the susceptibility of storm damage and coastal flooding.

2.2. Flash Floods and Factor Influencing Flash-Floods

Creutin, J.D. and M.Borga (2003) identifies that flash flood is a hydrological phenomenon which flows very fast and in which water can reach a peak level in less than 6 hours. Moreover, Saber, et al, (2010) highlighted that flash flood is a natural hazard which occur in arid and semi-arid locations with a very high velocity and occur in short duration, which is caused by high intensity of rainfall or dam failure and it impact to the infrastructure damages and loss of life. Thus, it can be concluded that flash flood is a dangerous natural hazard which can damage urban infrastructures and threaten human's lives and socio-economic sectors.

Various factors, such as physical processes and non-physical processes influence flash flood events. The physical processes include changes in geological and morphological factors, hydrological factors, and also human influences (Mandych, 2009). Kelsch, M (2001) highlighted that flash floods are hazards that area caused by severe rainfall, intensive run-off development with mudflows, soil erosion and landslides. Common characteristics which are influenced to flash-floods are morphological factors, rainfall as climatologic factors, and land-use as human interventions.

2.2.1. Influences of physical factors to flash-floods

2.2.1.1. Geomorphological conditions

Surface conditions affect flash flood events. The geomorphological conditions of the area which are mountainous and steep slopes are some trigger factors of flash floods (Diakakis, M, E. Andreiadakis, and I. Fountoulis, 2011). The highlands usually have the river upstream. If the volume of water in the river increases and the terrain is steep, the water flows down with higher intensity. If the downstream river cannot accommodate the water from upstream, the flash floods can occur and water flows with high velocity to the downstream area. It is different with flat-slope area, run-off water would be flown in low or moderate velocity and water only inundate in those area for a long time. Whereas, in the steep-slope, run-off water usually flow down into the lower areas with high velocity and volume. The geographic situation in the area where the flood takes place affect to the scale of floods, depth of inundation, and its duration (Mandych, 2009). The characteristics of catchment area, including catchment shapes, drainage patterns and waterway steepness is also necessary to analyzed (X.Liu, Z. Zhang, and K. McDougall, 2011). Those parameters are necessary for identifying the hydrologic behaviors for each catchment area. The hydrologic behaviors illustrate the slope gradient of waterways and catchment area, and also, the land characteristics to catch run-off water.

2.2.1.2. Soil characteristics

Beside the geomorphological conditions, soil characteristics also influenced to flash-flood events. The characteristics of the soil that affect flash-flood events are soil moisture, soil permeability, and soil porosity. Soil moisture is the quantity of water which is contained or stored in the upper-part of the soil. Soil moisture is defined as the amount of water stored in the soil. It makes soil pores will not absorb into the soil. It means the infiltration ability is decreased and the possibility of flash floods is larger. In addition, soil porosity is the proportion of empty spaces in the soil which can be occupied by water or air. The porous soil is drought, so it is hold and keeps water. The rate of soil infiltration is less because of the soil difficulties to hold and store water in the soil pores (Pedzaisai, 2010).

Other soil parameter is influenced is soil permeability. Soil permeability is the soil parameter that indicates the soil capacity to transmit or pass water or other fluids. The most common indicator of this variable is soil textures, which gives an overview of the proportion of soil grain size (Masters, 2009). Generally, the small soil sizes, such as clay and silt. The soil surfaces of these soils are smooth, wide, and has smaller percentage of porous than sandy soil. These characters make silt and clay are very functioning in water retention. Thus, silt and clay are strong to hold water and store their organic materials. However, these soil

types are difficult to pass/flow run-off water, so run-off water will be tend/pool and it does not infiltrate into the ground. It is different with sandy soil. Sandy soil with large soil particle sizes has higher infiltration rates. It has more porous textures and this character make sandy soil is easy to water and air movement into the soil. Thus, the rate of infiltration of sandy soil is faster and higher than clay and silt.

Beside soil textures, there is soil profile which is affected also to the soil infiltration. Soil profile describes the vertical organization of soil layers and the depth of soil column. For example, sandy soils have higher infiltration rates. However, when there is thin layer of clay material below the sand, the infiltration rates become small, so that the surface run-off becomes higher. The decreasing amount of water in surface areas is an effect from high infiltration ability of soil which is combined with deeper soil.

Human interventions, such as over-cultivation to the soil, soil compaction, and land clearing, also give impacts to soil (Masters, 2009). Those activities change soil structure and its cohesion, so that it potentially decreases their ability to absorb water. The granular soils which are entered into the soil can fill/store in soil pores. This condition makes the size of soil pores become smaller, so that it can obstruct the infiltration rates.

2.2.1.3. Drainage basin

Besides the characteristics and properties of the soil, the drainage basin also affect to the flood events. There are several basin factors that influence the susceptibility to flood, such as basin slope and surface roughness. Types and ranges of slope will be affected to the run-off time and amount of infiltration. The intensity of run-off water in high-slope areas is higher than run-off water in flat-slope. This is due to the higher magnitude of the gravitational force that pulls water into the soil surface (Creutin, J.D. and M.Borga, 2003). The higher intensity and magnitude of run-off water make the infiltration rate is decreased. The higher frequency of run-water in the stream discharge allows the less infiltration rates (Westen, C.J., et al, 2011).

Furthermore, the physical conditions such as basin size and shape are also influenced. Runoff water from the upstream area of the larger basin size to the downstream area takes more time than water runoff in the smaller basins. In addition, the shape of the basin is also giving big impacts on the flow of runoff water and its duration. The wide basin shape or round will affect to the runoff water from some points, the run-off water will converge in one location at the same time.

2.2.2. Influences of rainfall to flash-floods

Like the basin characteristic, the rainfall is important to determine the characteristics of run-off. The rainfall factors that influence to the flood events are the rainfall intensity and its duration. Besides that, flash flood can be caused by slow-moving thunderstorms, heavy rains from hurricanes, and tropical storms (Macklin, Larry D, Paul J.Ehret, and Michael W. Neyer, 1999). The high intensity of rainfall effects to the soil saturation. Soil saturation is the comparison between volume run-off water and volume of soil pores. If the soil saturation is high, the rate of soil infiltration becomes decreased.

The decreasing of soil infiltration rates are affected to the increasing of volume and magnitude of surface run-off. Thus, the flash-floods are possible to occur. It seems that there is a strong relationship between rainfall intensity, soil saturation, and the overland flow (Rustanto, 2010). The climate parameters, specifically surface temperature and rainfall also influent the slope stability. If the high intensity of rainfall occurs in steep-slope locations, the flood susceptibility of these locations becomes higher. This condition occurs if the soil characteristics in this area are smooth and porous which is not being able to infiltrate the water. Moreover, the high velocity of run-off water will be eroded the soil, so it is not only occur flash-floods, but also it can trigger landslides.

The hurricanes and tropical storms also influence the flash-flood events. The hurricanes and tropical storms are caused by the highest differences of air pressures. The difference in air pressure causes the

turbulences of winds which are accompanied by heavy rains. Both of parameters increase the influences of trigger factors which make the higher of potential damages from flash-floods. The strong energies and high speeds of hurricanes and/or tropical storms hit and damage many buildings and infrastructures which are traversed by flash-floods. In addition, the physical materials are also carried out by flash-floods, such as soil, mud, buildings, and other infrastructures. As a result, the potential loses are generated by flash-floods are increased the damages to the societies.

Return periods of rainfall is also considered in flash-flood events. Return period is “indicated the interval of period in years which hazards is likely to occur based on the historical records of rainfall” (Westen, C.J., et al, 2011). The assessment of return period requires the analysis of the rainfall characteristics during certain times. Data required to conduct this assessment is historical measured rainfall data. The return period assessment aims to analyze the run-off characteristics in certain locations. Thus, the preventions and responses actions to flash-flood events can be prepared and planned properly according to the flash-flood characteristics.

2.2.3. Influences of land-use types to flash-floods

Other factors that influent the flash flood events come from land use changes, mainly due to the human development activities. Ezemoye, M.N. & Emeribe, C.N. (2011) pointed out that urbanization processes in urban areas and interventions in the river and coastal areas for agriculture, residential, industrial, and commercial activities may also trigger flash-flood events. The high intensity of human activities and the surface compaction in particular areas decrease the capacity of land infiltration, interception, and surface storage (Pedzisai, 2010). Areas which are dominated with built-up areas have a lower infiltration capacity than agriculture lands and forest. In the un-developed areas, there are vegetation roots which can help to absorb and keep the water into the soil. The vegetation can also slow down the water and thus, reduce the velocity and volume of surface run-off. It is different with develop or built-up areas. Generally, built-up areas are closed by many pavements. They do not have natural lands which can support to the water absorption, so run-off will flow directly with high velocity. Based on this condition, the developed or built-up area has lower infiltration ability than undeveloped areas.

The differences of land cover also give different effects to surface run-off and flash flood events. For example, the agriculture lands have less infiltration than forest. This is due to the vegetation’s roots in the agriculture lands are not enough strong to absorb the water. Dunn in Pedzisai (2010) also declared that type and density of vegetation are important factors that are very influence to the soil infiltration rates. Furthermore, the vegetation roots are also important to decrease the run-off velocity. The vegetation roots store the run-off water strongly, specifically vegetation roots

Related with urban areas, run-off water in urban areas is flown in the drainage systems. However, the drainage cannot accommodate the run-off because low infiltration, interception, and less surface storage in build-up areas. These increases make the high possibility and impacts of flash floods. Moreover, the channel geometry also has a considerable influence on the possibility of flood events (Pedzisai, 2010). The shallow and narrows rivers are easily flooded.

Imamura, F. & To, D. (1997) declared that flash floods that occur in coastal areas have unique characteristics because they are frequently triggered by tidal surges or a dyke collapse. The combination between the high intensity of rainfall, the wind speed, and tidal surges make a great power of waves. It hit to the coastal areas and makes flash floods become more destructive.

2.3. Characteristics of Flash Floods

Flash floods are short-lived and destructive. It has a rapid stream rise with depths of water and can reach the banks of the creek very quickly. Bashir in Pedzisai (2010) highlighted that the specific peak discharge of flash floods is greater than 10 and can reach a value of $100 \text{ m}^3/\text{s}/\text{km}^2$. Alkema (2007) declared that flash flood occur suddenly and it is very extremely dangerous with high flow velocity and high impulsive, as result of maximum flow depth and maximum velocity. Flash-floods occurred due to the thunderstorm are moving slowly and or multiple thunderstorms which are occurred in some locations. Flash floods usually occur within six hours of the causing event (NOAA, 2010). However, the threshold of actual time in other locations may different and it is influenced with the location characteristics.

Flash-floods are based on the intensity and duration of rainfall, the catchment areas and shapes, drainage patterns, and waterway steepness. Flash-floods are very fast, have short durations, high speeds, and carry soil materials, mud, stone, wood, and other materials. In addition, flash floods have rapid water flow and extreme energy which are derived from built-up areas, agriculture lands, or overflow of river water due to increase drastically the volume of river water. The increasing of potential of sediment transport within water run-off is caused by the deforestation and wild-fires. These activities change the soil characteristics, specifically soil become hydrophobic and it cannot infiltrate run-of water (NOAA, 2010). It is usually occurs after the high intensity of wild-fires in coniferous forest.

The flash flood can reach 3-6 m height and loaded with debris. Furthermore, flash flood also can trigger other hazards, like landslides and mudslides. High intensity of rainfall in the steep-slopes can decrease the soil stability and makes landslides or damaging buildings and properties (X.Liu, Z. Zhang, and K. McDougall, 2011). Flash floods usually happen in area with steep slopes and with impermeable surface or with saturated soils. CSIRO (2000) explains that the characteristics of flash flood can be classified into 5 categories based on their flow depth and velocity. It can be shown in **Table 2-1**.

Table 2-1 Flash-Flood Hazard Categories

Hazard Category	Base Flood Events	Characteristics
Low	100 year	Areas that are inundated in a 100 year flood, but the floodwaters are relatively shallow (typically less than 1 m deep) and are not flowing with velocity.
High - Wading Unsafe	100 year	The depth and/or velocity are sufficiently high that wading is not possible, risk of drowning.
High - Depth	100 year	Areas where the floodwaters are deep (>1 m) but area not flowing with high velocity. Damage only to building contents, large trucks able to evacuate.
High - Floodway	100 year	Typically areas where there is deep water flowing with high velocity. Truck evacuation not possible, structural damage to light framed houses, high risk to life
Extreme	100 year	Typically areas where the velocity is $> 2 \text{ m/s}$. All buildings likely to be destroyed, high probability of death(CSIRO, 2000)

Source: CSIRO (2000)

2.4. Flood Modelling

Flash flood is an unpredictable and sudden event that brings the great power with high destructive power and incredible speed (Bashir on Pedzisai, 2010). The flash floods impacts greatly affect humanity and are rated among the deadliest of all natural disasters. This is also caused by the difficulties to predict the flash floods events. Flood modelling contributes to the reduction of the flash-flood impacts and to reduce the uncertainty conditions in the flood-susceptibility areas.

Flood modelling is important things to estimate the run-off from rainfall in order to know the inundation areas of flood (Prachansri, 2007). Moreover, run-off modelling is needed for getting to know the characteristics of flash flood and forecast the flash flood threshold in some areas (Pedzisai, 2010). The results of flood modelling can support for preparing and conducting the effective actions to reduce the flash-flood impacts. Flash-flood prediction is an important consideration in the decision making of disaster management (Pedzisai, 2010). The best model is obtained, if there are similarities between model's performances with the reality of flash-flood events. Thus, the best model can represent the reality or the generated situations of flash-flood events in the past.

2.4.1. Data preparation and assessment, according to the data requirements;

To get the best and most appropriate model, it is required some make considerations that are relevant to the modelling objectives, such as data availability, scale and time series data, technical knowledge, and also computing facilities. Thus, the data used to build model must be appropriated also with the aims of model. In the flash flood modelling, the intensity of rainfall is one of the important aspects to be analyzed. It is used to estimate the increasing of flood effects to some areas, specifically in order to get the real time forecasting.

Pedzisai (2010) also described that to build the appropriate run-off model, size and unit measurements of data are important. For example, pixel size is important for slope analyses. Besides that, time series of rainfall data are very important. Data preparations for conducting flood modelling based on five standard parameters (Setiawan, 2010), that are consist of (1) overland flow and channel flow; (2) soil surface, such as manning's n, random roughness, and other; (3) green and Ampt infiltration; (4) vegetation characteristics, like leaf area index, fraction canopy coverage; and (5) catchment characteristics, include slope gradient, catchment boundaries, and other variables. All of data that will be used as an input map for flood modelling should be rasterized in same resolution, so that the modelling process can be conducted well. Before applying in LISEM software, data preparations can be operated in PC Raster.

2.4.2. Formulate and build flood modelling;

The Limburg Soil Erosion Model (LISEM) is a model that is used to conduct flood modelling. This software was constructed for quantifying the amount of run-off in the catchment areas in considering the changes of land use and the other factors affected the surface run-off (Prachansri, 2007). It is important to prepare the detail and high resolutions data to get the appropriate model using LISEM. The detail explanation about OpenLISEM can be shown at **section 2.5**.

2.4.3. Generating the result of flood modelling;

There are several indicators which are important to describe the characteristics of flash-floods. Flash-flood characteristics include peak discharge, total discharge, infiltration, and other flood parameters, such as flood volume, flood area, and flood volume (Maddox, R.A., Canova, F. & Hoxit, L.R, 1980). These parameters are calculated as results of flood modelling.

- a. Peak discharge is the highest point on the hydrograph when the discharge level is located in the highest point.
- b. Total discharge is the total of run-off of water flow in the rivers, channels, or certain locations when flash-flood occurred.
- c. Infiltration is the process of absorb or transmit water into the soil which is influenced with soil characteristics, vegetation's roots, and land use types.
- d. Maximum flood depth is defined as maximum depth of water which occurred during flood events during several times.

- e. Flood area is the affected areas of flood events. The areas affected by flood can be predicted with considering flood vulnerability parameters.
- f. Maximum flood volume is maximum of run-off water from which is caused by the high intensity of climatic factors or hydrological effects.

2.4.4. Conduct calibration, validation, and sensitivity analysis;

There are some actions that should be done after running flood model, such as model calibration, model validation, and sensitivity analysis are required. They are important to guarantee that results are appropriate and we can trust the modelling results. Several steps should be conducted to get the best model performances, such as sensitivity analysis, model calibration, and model validation.

2.4.4.1. Sensitivity analysis

Sensitivity analysis is used to determine changes in behavior/characteristics of the model as a result of adjustments/adaptation to one or more parameter values in the model (De Roo, A.P.J. & Jetten, V. , 1999). Sensitivity analysis aims to determine the parameters that have the greatest influence on the model result. Some steps to conduct sensitivity analysis, such as:

- The sensitivity analysis performed with 3 times the calibration to identify the most sensitive parameter.
- The level of sensitivity of a parameter may depend on other parameters. Sensitivity analysis can be done by changing the combination of parameters.
- Sensitivity analysis is conducted by the simulations using symmetrically and uniformly model by adding specific value such as 10% adding and 10% subtracting (Prachansri, 2007). However, this value is not always used. It seems that the adding and subtracting values can be modified according to the research aims and characteristics of study area. Thus, the research should be estimated and predicted the appropriate value for developing sensitivity analysis.
- The result of sensitivity analysis is model parameter which is classified into the most sensitive parameters to flood.

2.4.4.2. Calibration

Calibration requires for minimizing the deviation between the results of the flood modeling (simulated data) and the observed or measured data of flood events. Conducting the model calibration aims to obtain the similarity between flood modelling results with to the measured values. If the measured data and simulated data are more similar, the model can be categorized into an accurate model. It means that the accuracy of flood model can be shown from the similarity result between measured data and simulated data. Calibration process is conducted by identify and assess the appropriate values for certain parameters (Hunter, Bates, P.D, et al., 2005). The certain parameters involved in calibration process are selected from the result of sensitivity analysis.

2.4.4.3. Validation

Validation process is conducted to analyze and validate the model. From the calibration processes, it can be known the assumptions and the relationships between the measured and simulated data. Model validation is conducted by assessing the flood model into other locations. From validation processes, researcher can reproduced the real behavior sufficiently and model can be applicable in other flood plains (Connel, Painter D, et al, 2001). The results of flood modelling should be reflected the essential features and behaviors of the flash-flood existing events (Westen, C.J., et al, 2011). This process is conducted by assess and apply flood models in other locations that are susceptible by flash-floods. The method used to

processes. In order to develop model with OpenLISEM, it is important to prepare the detail characteristics of soil surface, such as channel information, road information, building information, soil structures, and soil physical information.

3. RESEARCH AREA AND METHODOLOGY

3.1 Research Area

3.1.1. Location

Grenada is one of the small island states in the Eastern part of the Caribbean region. It is located between latitudes $11^{\circ} 59'$ and $12^{\circ} 20' N$ and longitudes $61^{\circ} 36'$ and $61^{\circ} 48' W$. The main island of Grenada has 312 km². Its topography is dominated by steep-slopes with mountains in the center of this island. In 2010, the total population in Grenada was estimated 110,000 people (GFDRR, 2010).

The main island of Grenada has 71 watersheds. The 12 largest watersheds are (Grenada's Land Use Division): Great river watershed; Beausejour watershed; St. Patrick's watershed; St. John's watershed; La Chaussee watershed; Victoria watershed; Tivoli watershed; Pearls watershed; Chemin watershed; Union watershed; Gouyave watershed; and Dougladston watershed. From several watersheds in Grenada, this research is only conducted in St. John's watershed that is included in St. George Parish and Gouyave watershed that is included in St. John Parish.

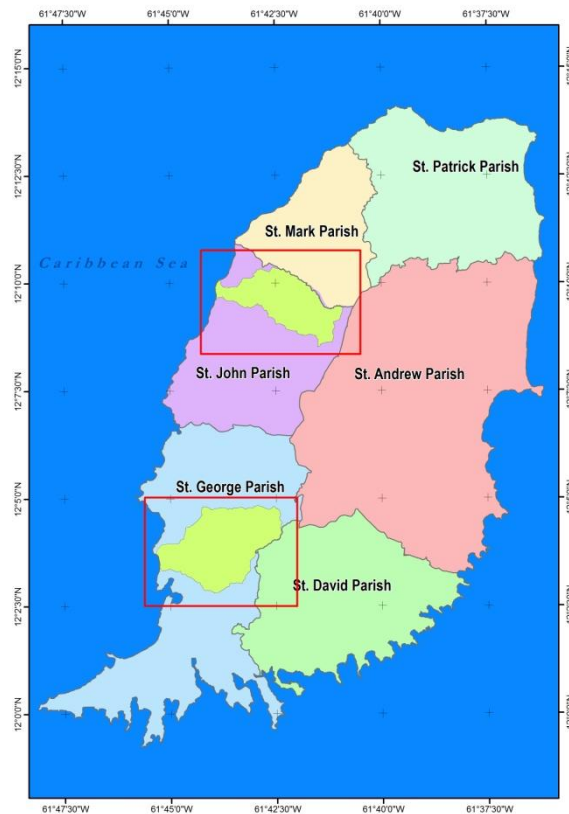


Figure 3-1 Orientation map of Gouyave watershed and St. John's watershed to 6 parish in Grenada

The Gouyave watershed is located in the north-west of Grenada and has a surface area of 8,39 km². The main river in this watershed is Charlotte River that divides Gouyave town into two areas in the downstream. The total area of St. John's watershed is 12,17 km² with St. John River as the main river. This

watershed is located in the south-western part of Grenada. The lower parts of this area are dominated by the built-up areas of St. George, the capital city of Grenada. **Figure 3-2** shows the location of Gouyave watershed and St. John's watershed. Then, **Figure 3-3** shows the satellite imagery of Gouyave watershed and St. John's watershed.

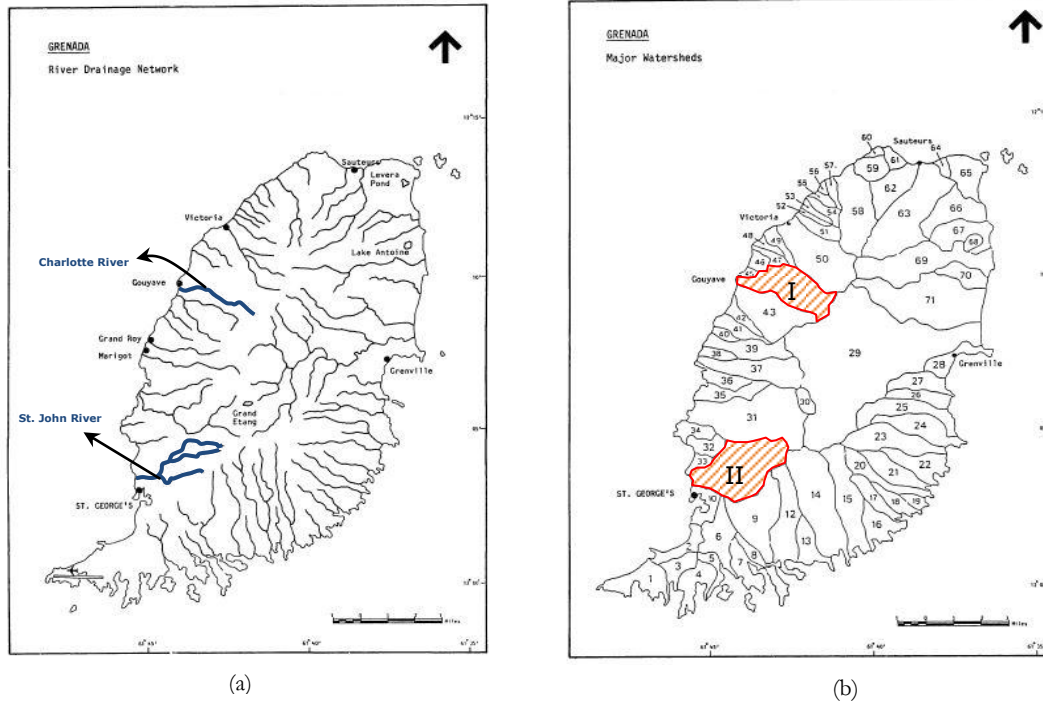


Figure 3-2 (a) Charlotte River and St. John's River and (b) Gouyave Watershed (I) and St. John's Watershed (II)

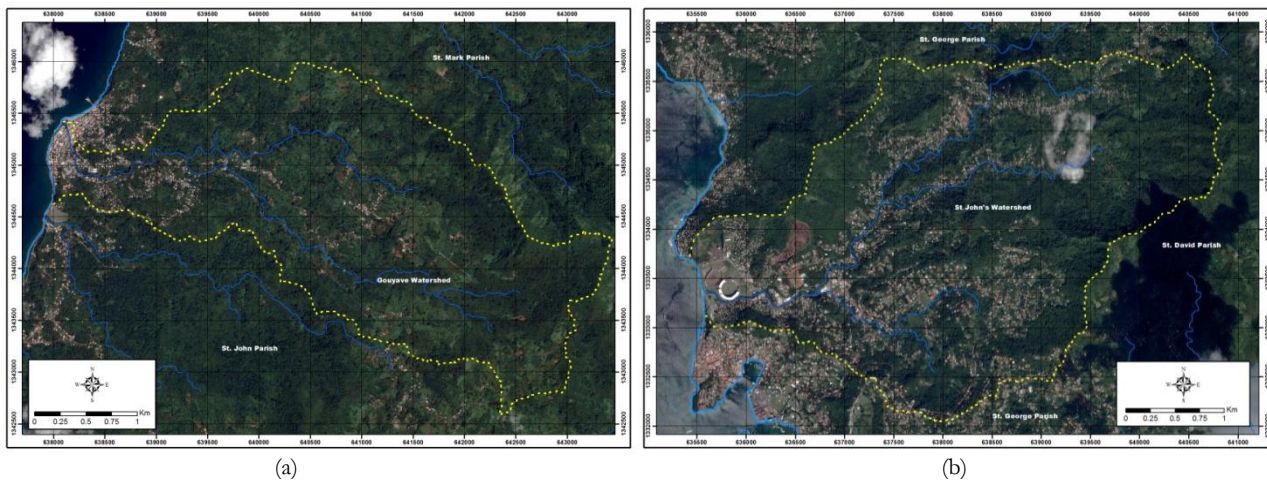


Figure 3-3 (a) Satellite Imagery of Gouyave Watershed and (b) Satellite Imagery of St. John's Watershed

3.1.2. Topography

Most of areas in Gouyave watershed are dominated with highlands, mountain peaks, and deep narrow valleys with elevation more than 200 m above sea level. The highest point in Gouyave watershed located in 690 meters above sea level. The Gouyave highland-areas are dominated in the eastern parts and southern parts of this area. Moreover, Gouyave areas which have elevation in 50-100 m above sea level (low-land areas) are located near the coastal area. It is different with the St. John's watershed area. Most of

St. John's watershed areas are flat with elevation 50-150 m above sea level. However, the highest point in St. John's watershed located in 474 meters above sea level. The highland areas in St. John's watershed are only found in the eastern parts of this area, near the St. David Parish. The elevation map of St. John's watershed and Gouyave watershed can be shown in **Figure 3-4**.

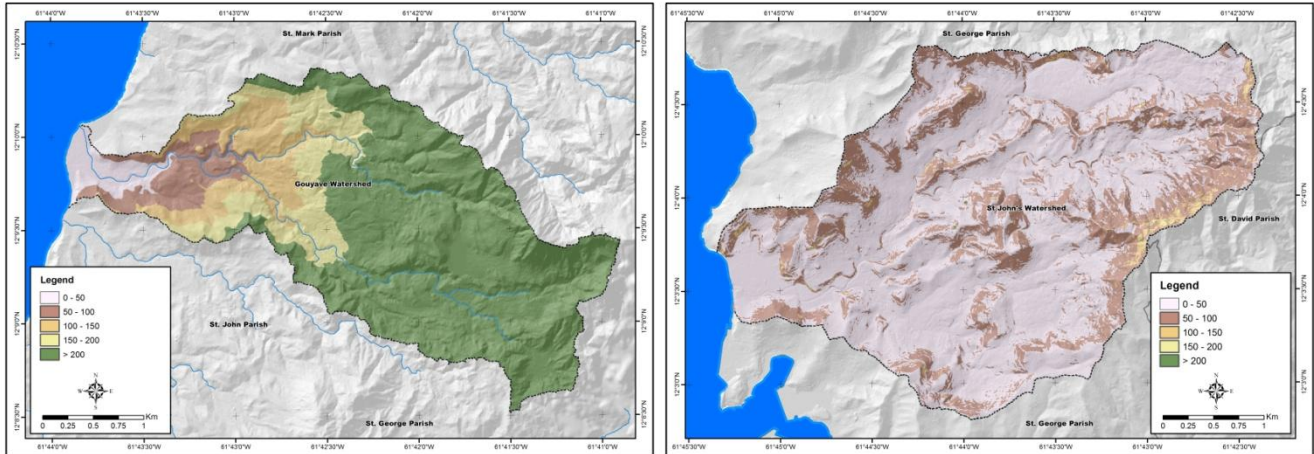


Figure 3-4 (a) Elevation Map of Gouyave Watershed and (b) Elevation Map of St. John's Watershed

The slope categories in Gouyave watershed and St. John's watershed are divided into 6 classes, such as:

- Class 1, flat or almost flat (0 - 2%)
- Class 2, gently sloping (2 - 8%)
- Class 3, sloping (8 - 13%)
- Class 4, moderately steep (13 - 25%)
- Class 5, steep (25 - 55%)
- Class 6, very steep (more than 55%)

The detail information for slope categories in each area is shown in **Table 3-1**.

Table 3-1 Slope Categories in St. John Watershed and Gouyave Watershed

Gouyave Watershed			St. John's Watershed		
Slope-Class	Area (km ²)	Percentage (%)	Slope-Class	Area (km ²)	Percentage (%)
1	0.151	1.80	1	0.230	1.89
2	0.491	5.85	2	0.528	4.33
3	0.695	8.29	3	0.834	6.84
4	1.777	21.19	4	2.477	20.33
5	3.348	39.92	5	5.550	45.55
6	1.925	22.95	6	2.566	21.06

Generally, Gouyave watershed and St. John's watershed are dominated with steep area; consist of moderately steep, steep, until very steep. In Gouyave watershed, the slope-class category that is dominated in Gouyave watershed (39.92% from total area) is slope-category 5. It is covered 3.348 km² of Gouyave watershed area. Furthermore, slope-class 5 (steep, 25-55%) is enough dominated in St. John's watershed. The total area that is covered by slope-class 5 is 5.550 km² or 46% from total area of St. John's watershed.

The steep-slope in the majority of St. John's watershed area and Gouyave watershed area indicate that those locations are susceptible to flood, because the steep-slope will increase the velocity and water volume of surface run-off.

3.1.3. Land-Use Characteristics

Land use classes in this research are adopted from land-use classes which are derived from the previous studies with homogenous land-use classes. The land-use types in Gouyave watershed are very dominated with green areas, such as forest, mixed-trees, and agriculture lands. Forest and mixed-trees covered in the most of Gouyave upper-part areas. There is only tropical forest-type in Gouyave watershed. The tropical climate is also influenced the agriculture activities in Gouyave which is produce paddy, nutmegs, bananas, cocoa, and other food crops. Other land-use types that are existed in Gouyave watershed are built-up area, grassland, shrub, and bare-land. The built-up areas only can be found in the lower-parts of Gouyave watershed, near coastal area.

There are 6 land-use types in St. John's watershed, such as bare, built-up area, forest, grassland, mixed-trees, and shrub. The built-up areas are located in the upper-parts and the lower-parts of St. John's watershed. Built-up area in St. John's watershed consist of housing, government's offices, hospitals, trade and commercial areas, and other human facilities. Moreover, there are many land conversions that change forest/other green areas into built-up areas in the some upper-parts of St. John's watershed due to human activities. However, forest and mixed-trees are still the land-use types that dominate St. John's watershed. Differently with Gouyave watershed, there is not agriculture lands in St. John's watershed area.

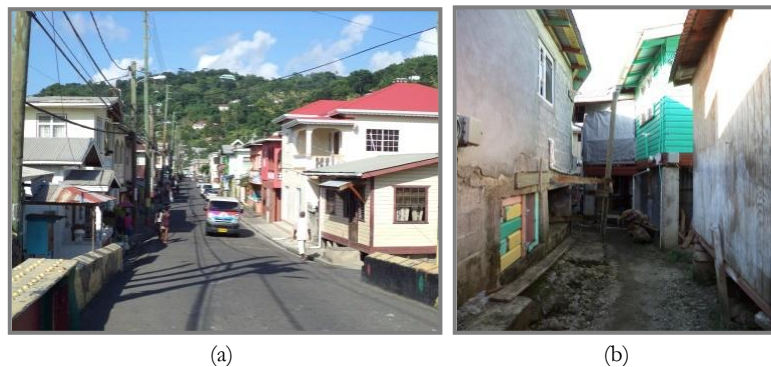


Figure 3-5 (a) and (b) Built-up areas in Gouyave watershed and St. John's watershed



Figure 3-6 (a) Forest and (b) Mixed-trees

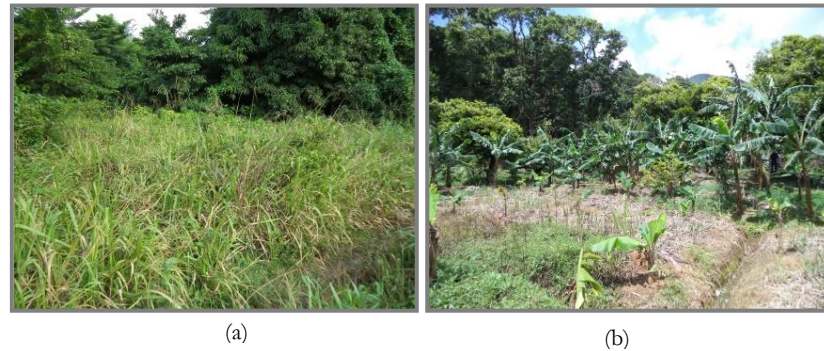


Figure 3-7 (a) Shrub and (b) Agriculture lands

3.1.4. Rainfall

There are 58 rainfall stations in Grenada, but only several rainfall stations that have been operated until now. However, those stations only recorded rainfall data with un-continuously for each year. The rainfall station that has continuous data is only Maurice Bishop International Airport (MBIA). This rainfall data is used to develop flood modelling in two watershed areas, Gouyave watershed and St. John's watershed.

The Maurice Bishop International Airport has time series of daily rainfall data started from 1986 until 2014. During 1986 until 2014, the average of annual rainfall is 1.109,6 mm. The highest annual rainfall occurred in 2010 with 1.513,3 mm and the lowest annual rainfall occurred in 1992 that only 338,6 mm. Furthermore, the highest of maximum daily rainfall is 177,5 in year 1990 and the lowest is 39,6 mm in year 1999.

Table 3-2 Maximum Daily Rainfall and Annual Rainfall (mm) during 1986-2014

Years	Maximum daily rainfall (mm)	Annual Rainfall (mm)	Years	Maximum daily rainfall (mm)	Annual Rainfall (mm)
1986	57	1130.6	2001	71.6	1060.4
1987	86.2	1094.5	2002	71.6	1208.2
1988	80.9	1402.4	2003	112.2	1312.2
1989	65.4	917.1	2004	133.7	1220.8
1990	177.5	693.9	2005	79.6	1090.7
1991	103.5	1328.4	2006	71.7	1021.5
1992	52.9	338.6	2007	86.6	1299.2
1993	63.8	744.9	2008	72.5	1341.4
1994	93	790.6	2009	53.2	1228.8
1995	72.1	1358.9	2010	80.7	1513.3
1996	60.1	1154.3	2011	172.9	927.1
1997	48.3	1050.5	2012	62	1063.3
1998	81.9	1249.2	2013	74.3	1079.4
1999	39.6	1016.9	2014	55	1231.7
2000	66.2	1310.2			

Source: Secondary Data from Maurice Bishop International Airport (MBIA), Grenada

The number of annual rainfall data during 1986-2014 can be seen at **Figure 3-8** below.

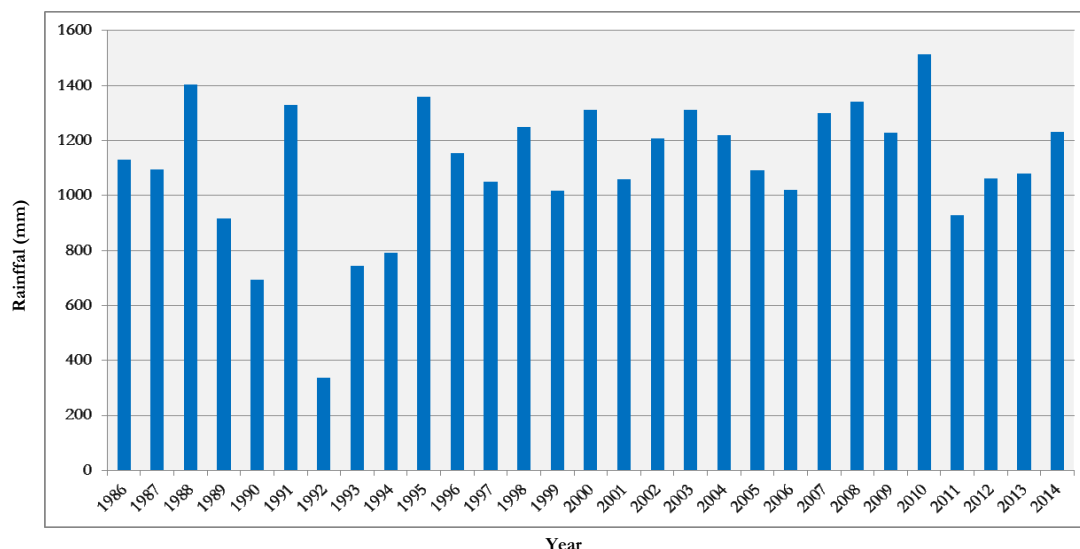


Figure 3-8 the Annual Rainfall in Grenada during 1986-2014

3.1.5. Soil Characteristics

Generally, soil characteristics in Grenada, specifically in Gouyave watershed and St. John's watershed are influenced by mountain and hill soils (CCA, 1991). From **Table 3-3** can be found that the dominant soil types in Gouyave watershed are belmont clay loam (very steep & shallow phase) and capitol clay loam (very steep & shallow phase) which is make up 38,82% and 28.19% area of Gouyave watershed. Both of soil types are formed from mountainous areas with steep slopes and high rainfall. The characteristic of capitol clay loam is very fertile, so it is very potential to use as agriculture lands. However, this soil is moderately erodible (CCA, 1991).

Then, the Belmont clay loam is usually found in the middle area of Gouyave watershed which has a high slope. The common characteristic of this soil type is moderately erodible (CCA, 1991). Therefore, the best use of Belmont clay loam is for forest because it has capability to reduce the massive erosion if it is covered by natural vegetation. It is suitable with existing land-use type in Gouyave watershed area.

Table 3-3 Soil textures of Gouyave watershed

Soil Texture Descriptions	Areas (km2)	Percentage (%)
Belmont clay loam	1.03	12.23
Belmont clay loam (stony & bouldery phase)	0.12	1.39
Belmont clay loam (very steep & shallow phase)	3.26	38.82
Bonair bouldery sandy loam	0.18	2.15
Capitol clay loam	0.07	0.89
Capitol clay loam (very steep & shallow phase)	2.37	28.19
Concord clay loam	0.07	0.78
Palmiste clay loam	0.46	5.54
Plains clay loam	0.03	0.38
Plains sandy loam	0.00	0.00
Woburn clay loam	0.68	8.12
No information	0.13	1.52
Total	8.39	100.00

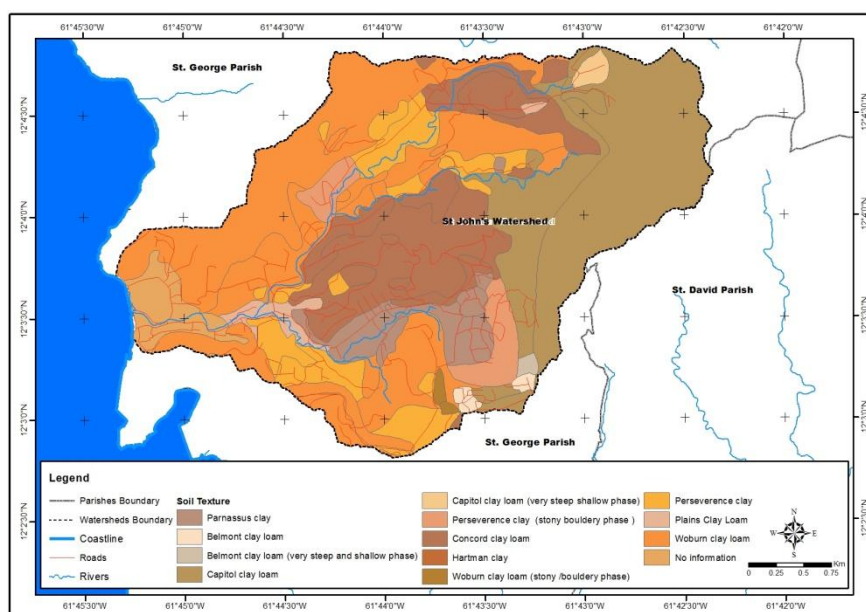


Figure 3-10 Soil characteristics of St. John's watershed

3.1.6. Geology Characteristics

The geology characteristics in St. John's watershed area and Gouyave watershed area are classified into 6 types. Based on **Table 3-5**, the dominant geology characteristic in Gouyave watershed is undifferentiated volcanic, mainly reworked (Pleistocene) which is covered 6,12 km² or 72,92% area of Gouyave watershed. The mount St. Catherine Volcanic is only covered the upper-parts area of Gouyave watershed. Then, the lower parts of Gouyave watershed is dominated with alluvial and superficial deposits.

Table 3-5 Geology Characteristics of Gouyave watershed

Geology Description	Areas (km2)	Percentage (%)
Alluvial and Superficial Deposits(Recent)	0.15	1.74
Lava Domes	0.55	6.53
Mount St. Catherine Volcanic (Pliocene-Pleistocene)	0.78	9.33
Town	0.13	1.52
Tufton Hall Formation (Late Eocene-Early Oligocene)	0.67	7.95
Undifferentiated Volcanic, mainly reworked(Pleistocene)	6.12	72.92
Total	8.39	100.00

The undifferentiated volcanic is covered 87,25% area of St. John's watershed, specifically in the upper-parts and center parts of St. John's area (**Figure 3-12**). It is different with coastal area which is dominated with town (3, 38% area). It is interested in surrounding the river; this area is mostly covered by alluvial and superficial deposits. More information about geology characteristics can be shown at **Table 3-6**.

Table 3-6 Geology Characteristics of St. John's watershed

Geology Description	Areas (km2)	Percentage (%)
Alluvial and Superficial Deposits(Recent)	0.23	1.90
Lava Domes	0.06	0.50
Point Saline Beds	0.21	1.73

Geology Description	Areas (km ²)	Percentage (%)
South East Mountain Volcanic (Miocene)	0.64	5.23
Town	0.41	3.38
Undifferentiated Volcanic, mainly reworked (Pleistocene)	10.62	87.25
Total	12.17	100.00

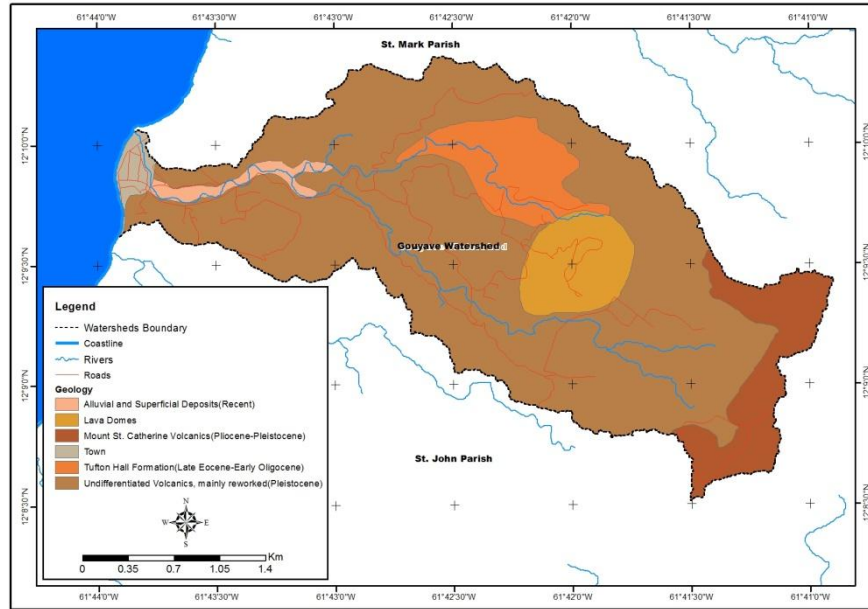


Figure 3-11 Geology characteristics of Gouyave watershed

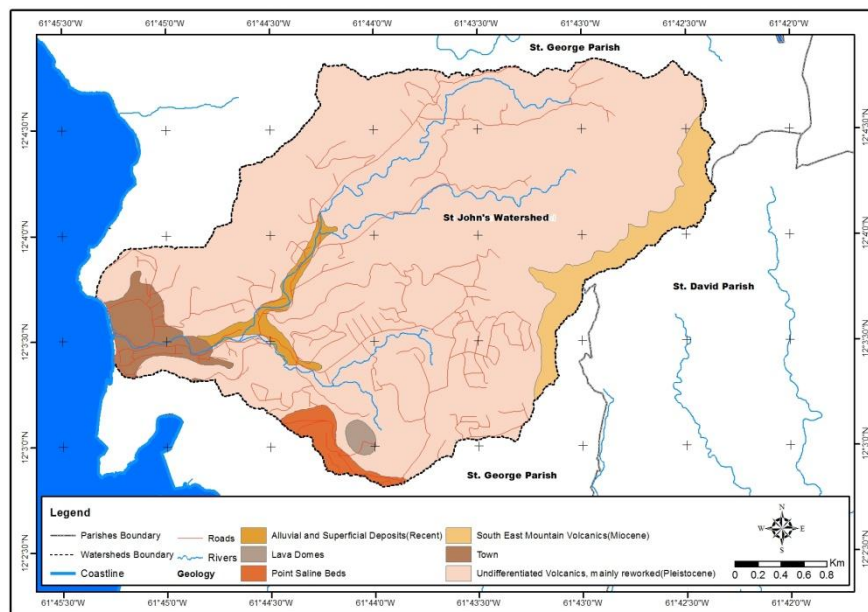


Figure 3-12 Geology characteristics of St. John's watershed

3.2 Research Framework

The research framework is developed to compare the flash flood behaviors at Gouyave Watershed and St. John's Watershed, Grenada. It also describes the input, process, and output of research. There are some stages that are conducted for achieving the research objectives. These phases are divided into 3 parts: pre-fieldwork, during fieldwork, and the post-fieldwork phase. The research framework can be seen at **Figure 3-13**.

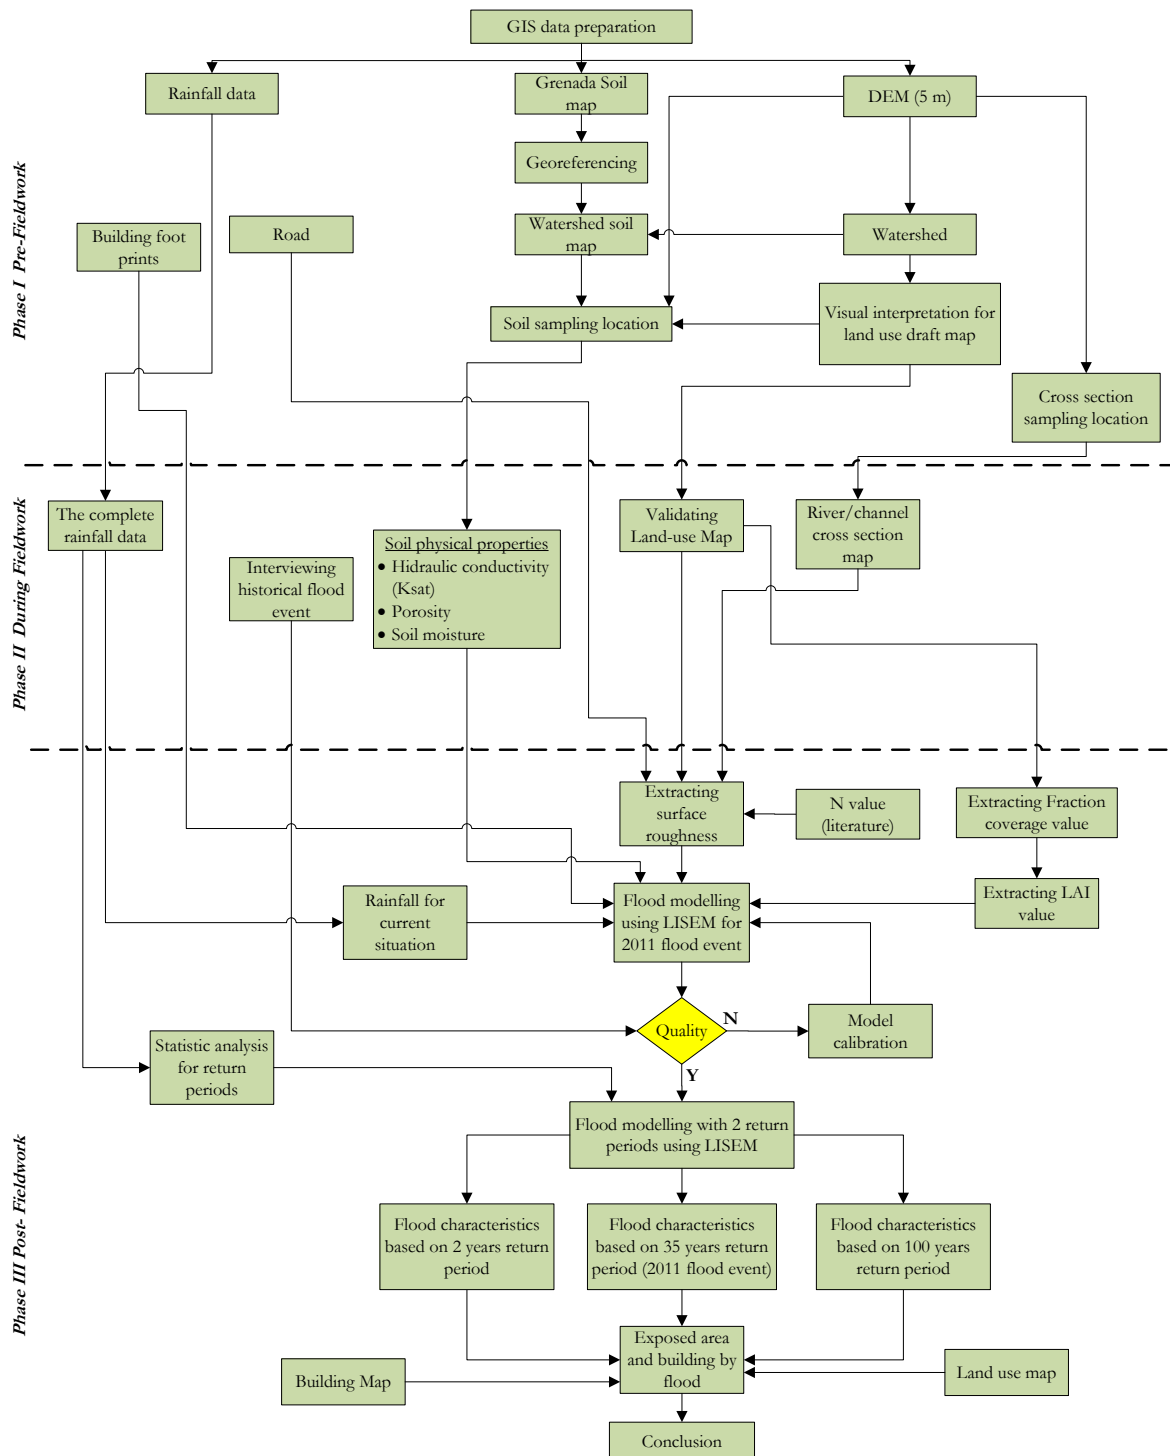


Figure 3-13 Research Framework

3.3 Data Collection

Data collection processes in this research is divided into 2 steps. They are pre-fieldwork and during fieldwork. In the first step (pre-fieldwork), researcher collected data and information from documents, data recordings, and or data calculations. The researcher also prepared some data that will be used during the fieldwork. The data that were prepared before conducting the field-work can be shown at **Table 3-7**.

Table 3-7 Data Collection before Fieldwork

Nu	Data	Source/Method
1	Grenada's base map (coast line, administrative units, roads, and rivers)	Grenada's government
2	Digital elevation model (with 5 m and 10 m resolution)	Grenada's government
3	Rainfall data at Maribeu (2003 to 2004 hourly); Pearls 44 ba (2005-2006); La Sagesse Agriculture station; Kubalal; Card; Botanic gardens (2003 -2012)	Grenada's government
4	Building footprints in St. John's and Gouyave watershed	Grenada's government
5	High resolution images (Pleiades images with 2 m and 50 cm resolution)	Grenada's government
6	Soil map, with soil texture information	(Niles, 2010)
7	Geomorphology map	(Niles, 2010)

The data in **Table 3-7** was used as input to get the preliminary information before the fieldwork. Fieldwork was conducted during 20 days. In the fieldwork, researcher collected the primary and secondary data. The primary data collection was conducted by interviews of the Grenada's citizens, governments, and non-government's institutions, and also by field observations. Moreover, researcher also took some soil samples and measured soil physical properties in Construction Materials Laboratory of the Grenada Bureau of Standards (see section 3.4.2). Then, the secondary data was obtained from the recorded data that have been prepared by certain institutions, such as the complete daily rainfall data from Maurice Bishop International Airport (MBIA).

After the data completed, researcher compiled and prepared those data for analyzing and creating flood modelling using OpenLISEM software. The details of this stage are generating the physical parameters, determining the rainfall intensity using statistical analysis, developing flood modelling, and also developing flood time propagation modelling. The detail data that used in this research can be shown in **Table 3-8**.

Table 3-8 Data Used in the Research from Fieldwork

Nu	Data	Source/Method
1	Daily rainfall data	Grenada's rainfall station
2	Land use and land cover	Observation/Field survey
3	Soil physical properties: Saturated hydraulic conductivity (Ksat) Porosity	Observation/Field survey
4	River/channel cross section data (depth and width).	Observation/Field survey
5	Flood depth caused by heavy local rainfall in 2011 or caused by hurricane in 2013	Interviewing the Grenada's government and the citizen around the St. John and Charlotte River

3.4 Methods

3.4.1 Software

Software used in this research, such as:

- Arc-GIS 10.2
- ILWIS 3.3
- ERDAS Imagine 2014
- PC Raster
- Open LISEM
- Microsoft office (word, excel, and power-point)

3.4.2 Sampling Procedures

In order to simplify the data collection process, get cost effectiveness and get an accessibility to study area, it is required to determine some samples which can represent the characteristics of study area. The sampling method is used to develop the analysis of soil physical properties. *Stratified random sampling* was applied in collecting soil samples during the fieldwork. This sampling method was choosed due to the combination of land use/cover and DEM map. The numbers of samples were determined by the proportion areas for each land-use type.

The land use changes may affect the peak run-off behavior and affect the magnitude of flood (Prachansri, 2007). In addition, land use practices and developments have an important role in determining the land cover and influencing to the run-off generation process, that are associated with soil physical characteristics (Pedzisi, 2010). The land conversions or land-use changes from non-built-up area into built-up area can decrease the infiltration rates and increase the run-off volume and magnitude. This effect can also influence the soil physical properties, such as Ksat and porosity. If soil infiltration rate is decreased, the possibility of flood event is increased.

Eighty (80 units) of soil samples were taken using a stratified random sampling method for St. John's watershed and Gouyave watershed. They were stratified according to the total area for each land use (**Table 3-9**), total sample for dominant land-use type (mix trees) is 56 samples. Whereas, the agriculture lands, bare, and grass land are only represented by 4 samples, 2 samples, and 3 samples, suitable with the extent area. The 80 soil samples collected and analyzed during the fieldwork in Grenada. However, researcher added 17 samples during fieldwork. These additional samples are needed to increase the data accuracy and the result of soil analysis can be represented all of study area. Thus, total samples in this research are 97 samples. Soil sample locations for this research can be shown at **Figure 3-14** and **Figure 3-15**.

Table 3-9 Number of soil samples number based on land-use types

Land use	Areas (km2)	Gouyave watershed		St John's watershed	
		Sample plan	Additional sample	Sample plan	Additional sample
Agriculture	0.18	1	3	-	-
Bare Land	0.19	-	1	1	-
Forest	4.47	10	-	10	-
Grass Land	0.24	-	2	1	-
Mix Tree	11	15	3	36	2
Shrub	1.16	1	1	2	5
Total		30	10	50	7

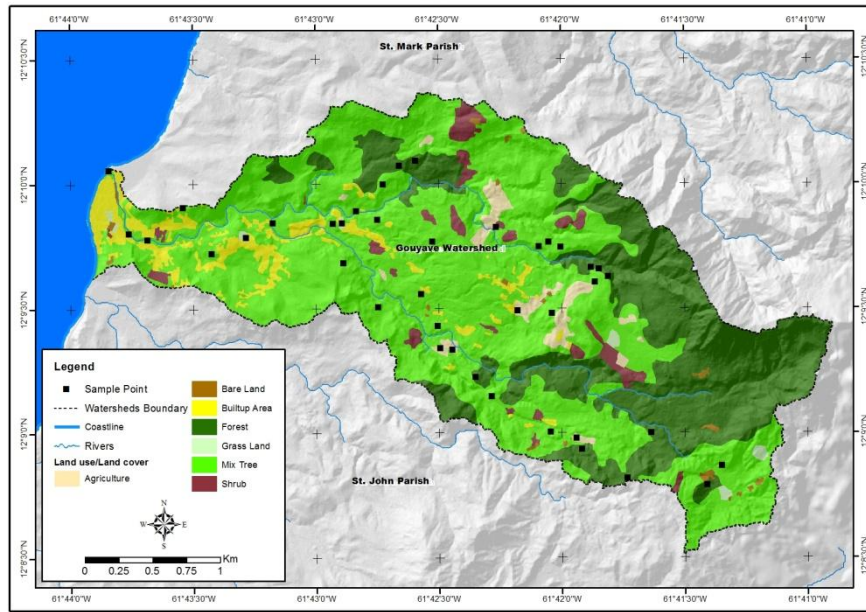


Figure 3-14 Soil sample locations in Gouyave watershed

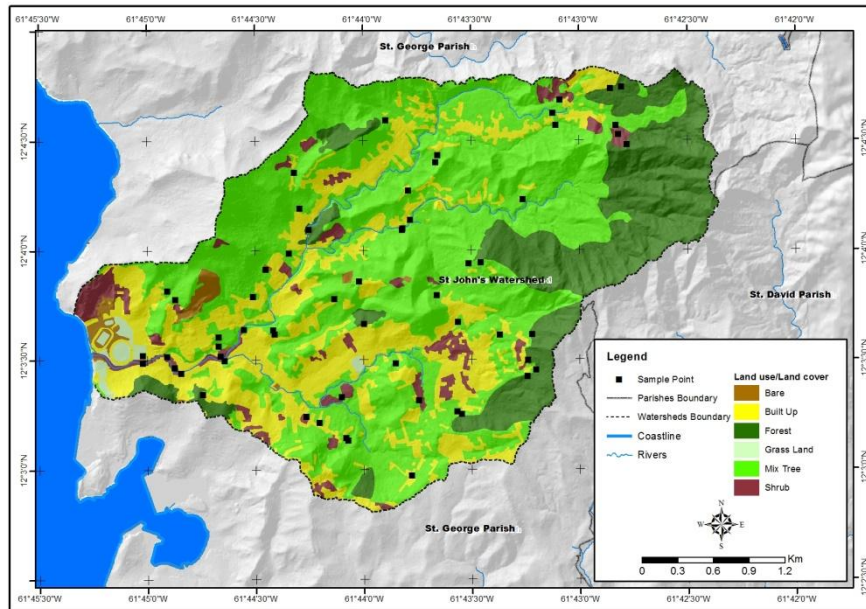


Figure 3-15 Soil sample locations in St. Johns watershed

3.4.3 Soil physical measurements

The soil measurements were conducted during the fieldwork phase in Construction Materials Laboratory of the Grenada Bureau of Standards. These measurements conducted in order to get the saturated hydraulic conductivity (K_{sat}), saturated soil moisture, initial soil moisture, and porosity. The soil sampling process were conducted by several steps, such as (1) Measured soil physical properties by measuring the undisturbed soil with taking 100 m³ of soil sample. (2) Inserted soil ring sample into soil sample, ensure that the soil still undisturbed. The soil ring that was used has 5 cm (diameter) and 5 cm (height). (3) Dig around the ring and removed the excess soil from bottom ring using a flat bladed knife. (4) In order to keep its soil moisture, it was necessary for covering soil ring with plastic bag. (5) Then, labeled the plastic

bag with soil sample number. (6) Measured the undisturbed soil for saturated hydraulic conductivity (K_{sat}), saturated soil moisture content, initial soil moisture content, and porosity. The detail stages for soil physical measurements can be shown at **Figure 3-16**.

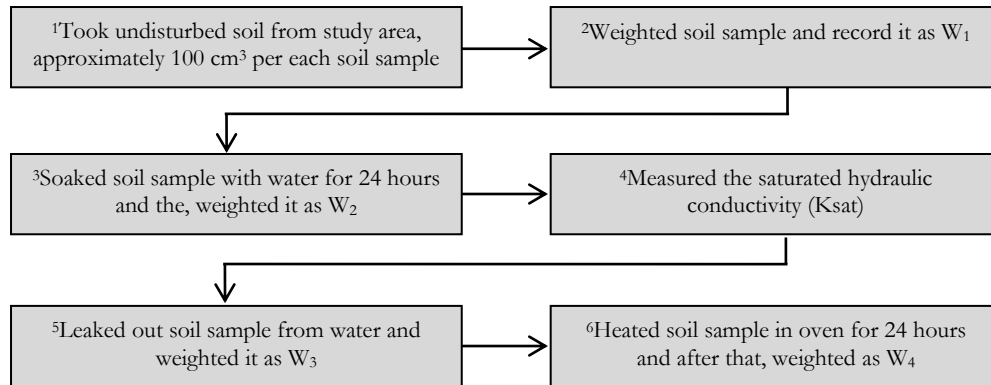


Figure 3-16 Detail stages for conducting soil physical measurements

The formula for calculating K_{sat} is:

$$K_{sat} = \frac{Q}{A} \times \left(\frac{L}{L+dh} \right) \quad \dots\dots\dots (3-1)$$

Note:

- Q = the gradient of the volume (cm³) during t minutes
- A = surface area of the ring measurement (cm²)
- L = surface area of the ring measurement (cm)
- dh = depth of the pounded water (cm)

The formula for calculating porosity is:

$$P = \frac{W_2 - W_4}{V} \times 100 \quad \dots\dots\dots (3-2)$$

Note:

- P = porosity
- W₂ = the saturate weight
- W₄ = the dry weight after heat in oven
- V = the ring volume (cm³)

The formula for calculating initial soil moisture content is:

$$\phi_1 = \frac{W_1 - W_4}{V} \times 100 \quad \dots\dots\dots (3-3)$$

Note:

- ϕ_1 = initial soil moisture content (%)
- W₁ = the base of soil weight
- W₄ = the dry weight after heat in oven
- V = the ring volume (cm³)

The formula for calculating saturated soil moisture content is:

$$\phi_2 = \frac{W_3 - W_4}{V} \times 100 \quad \dots\dots\dots (3-4)$$

Note:

- ϕ_2 = initial soil moisture
- W₃ = the dry weight
- W₄ = the dry weight after heat in oven
- V = the ring volume (cm³)

Then, some equipment's that were used in the soil physical measurements can be seen at **Figure 3-17**.



Figure 3-17 (a) Pseudeu laboratory method used Ksat Measurement (Alkema, 2009) and field observation and (b) Heating soil samples in oven for 24 hours to measure the porosity values

3.4.4 Parameterization Method for LISEM

In order to get the best and appropriate result of flood modelling, LISEM requires specific input data. The input data for this modelling is determined based on several parameters in developing flood modelling. Those parameters are catchment characteristics parameter, vegetation parameter, green and Ampt infiltration parameters, soil surface parameter, and also overland flow and channel flow parameter (Setiawan, 2010). Those parameters are obtained from literatures values which are compared with soil and land characteristics in research area. The detail data requirements for developing flood modelling using LISEM are listed in **Table 3-10**.

Table 3-10 Input parameters for flood modelling with LISEM

Parameters	Name	Method	Unit
Catchment characteristic			
Local drain direction	LDD.map	Derived from DEM	-
Catchment boundaries	AREA. map	Derived from DEM	-
Area covered by rain gauges	ID.map	Mapping	-
Slope gradient (sine of slope angle)	GRAD.map	Derived from DEM	-
Location of outlet and sub outlets	OUTLET.map	Derived from DEM	-
Rainfall data	ASCII	Derived from fieldwork	mm/hr
Vegetation			
Leaf area index	LAI.map	Derived from PER.map	-
Fraction of soil covered by vegetation	PER.map	Field observation	-
Vegetation height	CH.map	Field observation	m
Soil surface			
Manning's n scalar	N.map	Derived from literature	-
Random roughness	RR.map	Derived from literature	cm
Width of impermeable roads	ROADWIDT.map	mapping	m
Green and Ampt Layer I			
Saturated hydraulic conductivity	KSAT1.map	Measure from fieldwork	mm/hr
Saturated volumetric soil moisture content	THETAS1.map	Measure from fieldwork	-
Initial volumetric soil moisture content	THETAI1.map	Measure from fieldwork	-

Parameters	Name	Method	Unit
Soil water tension at the wetting front	PSI1.map	Derived from literature	cm
Soil depth	SOILDEP1.map	Field observation	mm
Green and Ampt Layer II			
Saturated hydraulic conductivity	KSAT2.map	Derived from saxton equations	mm/hr
Saturated volumetric soil moisture content	THETAS2.map	Measure from fieldwork	-
Initial volumetric soil moisture content	THETAI2.map	Derived from saxton equations	-
Soil water tension at the wetting front	PSI2.map	Derived from literature	cm
Soil depth	SOILDEP2.map	Field observation	mm
Channels			
Local drain direction of channel network	LDDCHAN.map	Derived from Idd.map	-
Channel gradient	CHANGRAD.map	Derived from grad.map	-
Manning's for the channel	CHANMAN.map	Derived from literature	-
Width of channel scalar	CHANWIDT.map	Derived from Idd.map	m
Channel cross section shape	CHANSIDE.map	Field observation	-

Source: Modification from Jetten (2002) and Setiawan (2009)

3.4.4.1 Catchment Characteristics parameter

To determine the catchment characteristics are required some parameters, such as catchment boundaries, local drain direction, outlet and sub-outlet location, slope gradient, and rain gauge location. The rainfall data was obtained from the Maurice Bishop International Airport (MBIA) in Grenada. However, the slope gradient data and land drain direction map are obtained from the DEM map which is resulted from interpolating topographic map and contour map.

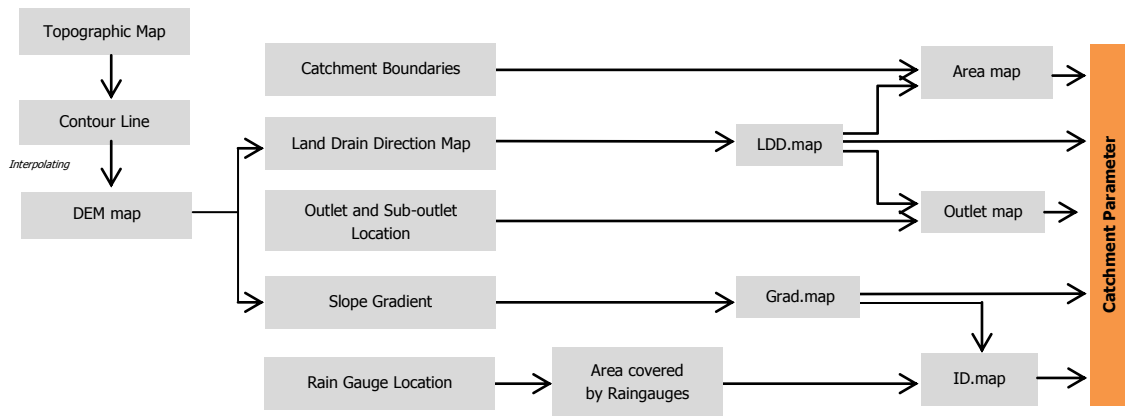


Figure 3-18 Flowchart to obtain catchment characteristics parameters

3.4.4.2 Vegetation parameter

The vegetation parameters required for the flood modelling are leaf area index (LAI. map), percentage of soil covered by vegetation (PER map, in fraction unit), and vegetation height (CH map, in m²/m²). In LISEM, the percentage of soil covered by vegetation is used to calculate the water interception. In order to get all of those parameters, it is needed the field verification of land use for updating the land-use map. From land-use map and field observation, it can be estimated the percentages of vegetation fraction and vegetation height. The values of vegetation fraction percentage and vegetation height can be informed in **Table 3-11**. Then, the leaf area index is estimated for calculating the water storage on the leaves. The leaf area index can be found using NDVI (Normalized Difference Vegetation Index) assessment. NDVI is an analysis which is conducted to determine the conditions of land cover, specifically in types and detail characteristic of vegetation (Xiao, Jingfeng and Aaron Moody, 2005). The input data for NVDI analysis is

derived from satellite imagery, then those data is interpreted using image interpretation keys. However, in this research, it was difficult to get the satellite imagery of research area to know the vegetation covers because the research area was covered by huge clouds. Thus, LAI factors were determined using comparison study from literature (Pedzisai, 2010 and Prachansri, 2007). Based on percentage of land coverage the LAI values can be shown at **Table 3-12**.

Table 3-11 Values of Vegetation Fraction Percentage and Vegetation Height

Land-use Types	Canopy cover percentage (-)	Vegetation Height (m)
Bare land	0.2	0.05
Built-up area	0.1	3
Forest	0.8	13
Grass land	0.85	0.5
Mix-Tree	0.7	10
Shrub	0.4	1.2
Agriculture/Mix-crop	0.35	4

Source: field-observation

Table 3-12 Values of Leaf Area Index

Land-use Types	Leaf Area Index (m ² /m ²)
Bare land	0.56
Built-up area	0.263
Forest	4.02
Grass land	4.74
Mix-Tree	3.01
Shrub	1.28
Agriculture/Mix-crop	1.08

Source: adopted from Pedzisai (2010) and Prachansri (2007)

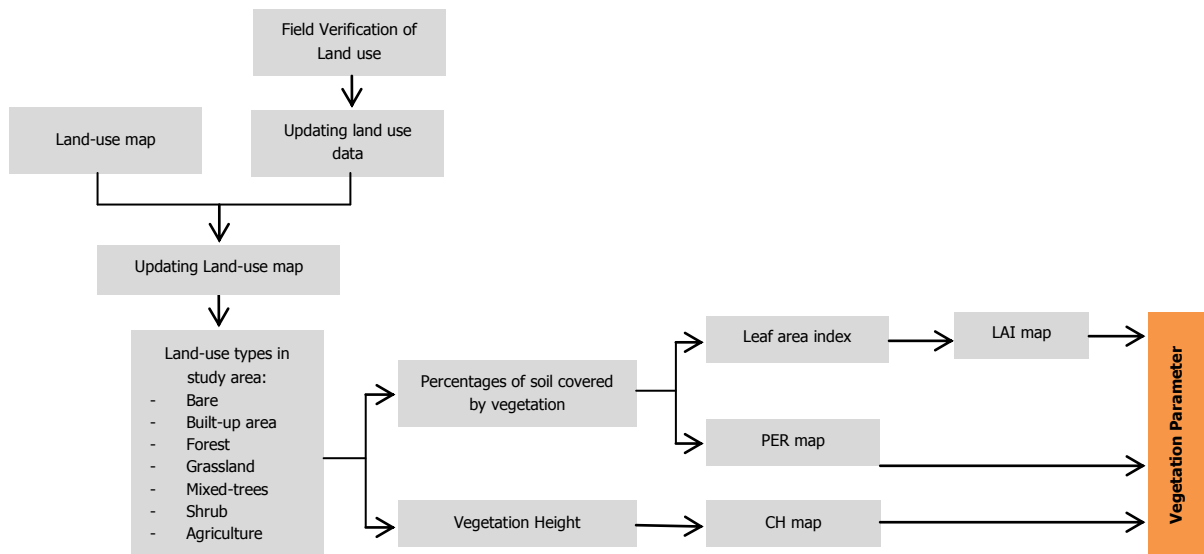


Figure 3-19 Flowchart to obtain vegetation parameters

3.4.4.3 Green and Ampt infiltration parameter

For running the green and Ampt infiltration, the several parameters are required such as hydraulic conductivity (Ksat1 map, Ksat2 map), initial soil moisture content (ThetaI1 map, ThetaI2 map), and

saturated soil moisture content (ThetaS1 map, ThetaS2 map). Layer 1 is derived from fieldwork and layer 2 is derived from literature. The soil water tension value is obtained based on the literature of wetting front.

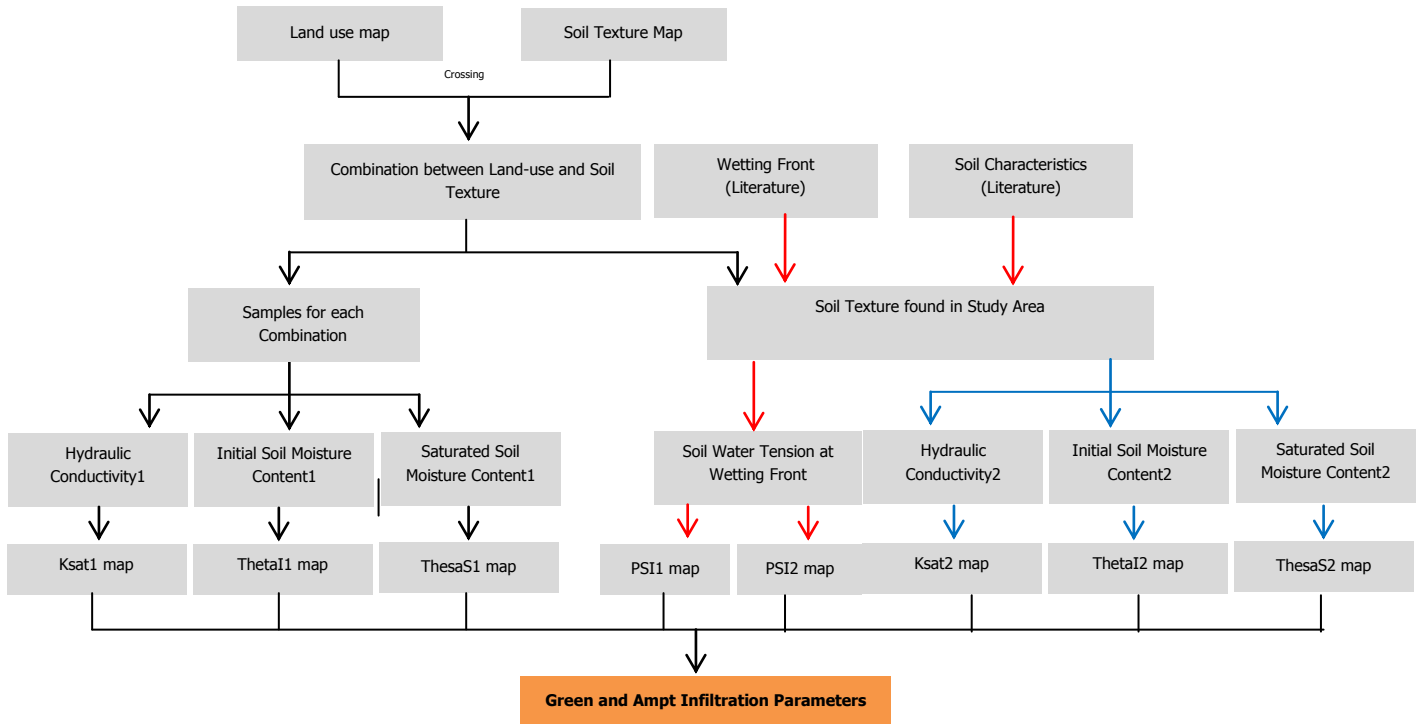


Figure 3-20 Flowchart to obtain green and Ampt infiltration parameters

3.4.4.4 Soil surface parameter

The basic data for determining the soil surface parameter is land-use map. The parameters used to determine and obtain the soil surface parameters are manning's coefficient (N map), width of impermeable road (ROADWIDT map), and random roughness of soil surface (RR map). The random roughness is important to calculate soil surface water storage and overland flow. The manning's coefficients and the random roughness adopted from the combination of Chow (1959), Setiawan (2009), Pedzisai (2010), Prachansri (2007), Solomon (2005) and it is determined for each land-use types in research area. Those values can be seen at **Table 3-13** and **Table 3-14**.

Table 3-13 Manning's Coefficient Values

Land use types	Manning's Coefficient Values (cm)
Bare land	0.023
Built-up area	0.03
Forest	0.1
Grass land	0.023
Mix-Tree	0.1
Shrub	0.04
Agriculture/Mix-crop	0.08

Source: adopted from Chow (1959), Setiawan (2009), Pedzisai (2010), Prachansri (2007), Solomon (2005)

Table 3-14 Random Roughness Values

Land use types	Random Roughness of Soil Surface (cm)
Bare land	0.05
Built-up area	0.05
Forest	0.5
Grass land	0.2
Mix-Tree	0.5
Shrub	0.2
Agriculture/Mix-crop	0.2

Source: adopted from Chow (1959), Setiawan (2009), Pedzisi (2010), Prachansri (2007), Solomon (2005)

However, the road width is important to assume the infiltration. Roads are constructed by hard/heavy materials that make the soil surface impermeable for water, it means that no infiltration. Thus, the road width is calculated by conducting the road measurements and mapping in the field.

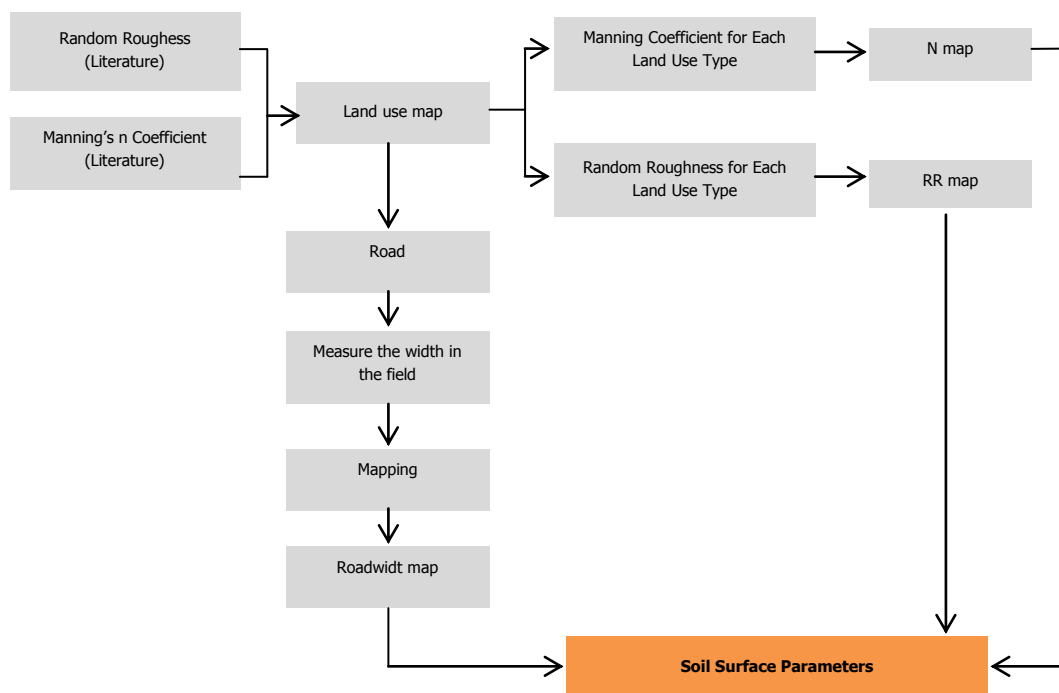


Figure 3-21 Flowchart to obtain soil surface parameters

3.4.4.5 Overland flow and channel flow parameter

The parameters used to determine the overland and channel flow are width of channel, channel cross-section shape, manning's coefficient for channel, local drain drainage of channel network, and channel gradient. The input data required for obtain those parameters and use it in modelling using LISEM, such as:

- The channel mask map was created from local drain drainage map (LDD map) using PC raster operation. From this map, it can be produced the width of channel (Chanwidth map) and the channel cross-section shape (Chanside map).
- The values of manning's coefficient is usually use in the hydrological model for calculating the overland flow and channel flow velocity. The N map (mannning's and value for the channel) that is retrieved from literature is used to produce the manning's for the channel (Chanman map).

- DEM map is used to produced LDDChan map (LDD of channel network) and Changrad map (Channel gradient)

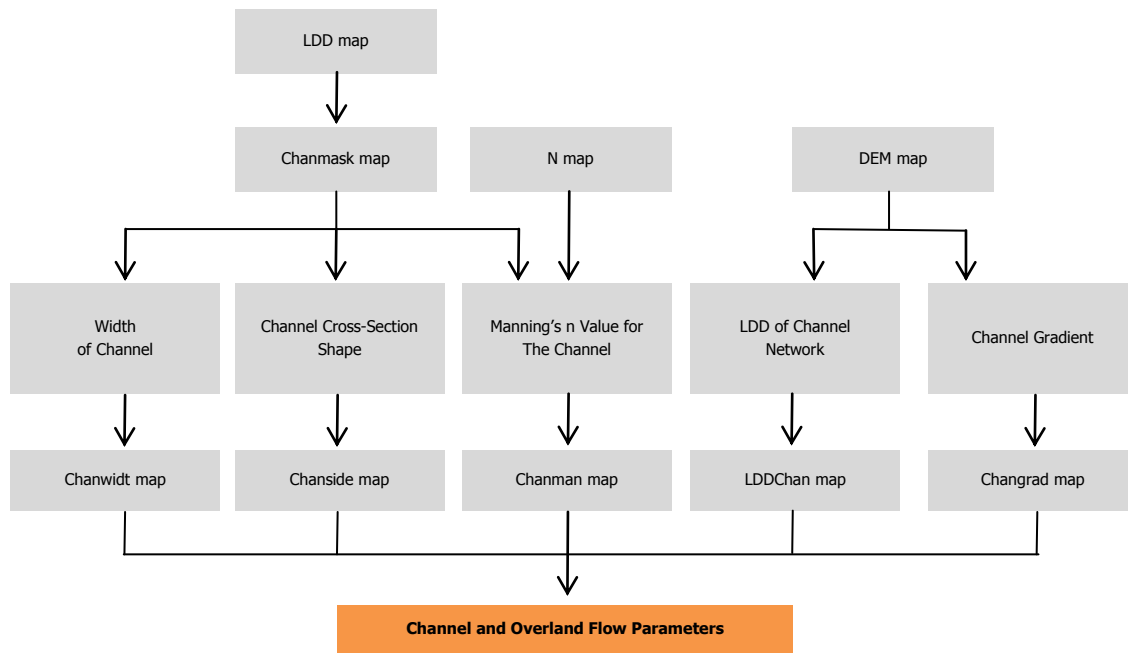


Figure 3-22 Flowchart to obtain overland flow and channel flow

4. PHYSICAL PARAMETERS FOR FLASH-FLOOD MODELLING

4.1 Land-use types in the research area

Land use of Gouyave watershed and St. John's watershed are known from the visual interpretation of satellite imagery (Pleiades). Most of area in St. John's watershed and Gouyave watershed are covered with natural vegetation areas, such as forest, grassland, and mix-tress. However, there are not agriculture lands in St. John's watershed. Therefore, total area of natural vegetation area in St. John's watershed (8.46 km²) is larger than the green total area in Gouyave watershed (7.26 km²).

Table 4-1 shows that both the Gouyave and St. John's watershed are dominated by mixed-trees. In Gouyave watershed, they covered 4, 78 km² or 56.96% of the total area and in St. John's watershed is 6.22 km² or more than 50% of the watershed area. Moreover, the built-up areas in two watersheds are very different. The built-up areas in St. John's watershed are enough dominate (23.28%), while in the Gouyave watershed; it is only 5.53% from total area. It is indicated that the St. John's watershed represent urban area and Gouyave watershed represent rural area. The detail characteristics of land use in St. John's watershed show in **Table 4-2**.

Table 4-1 Land-use in Gouyave Watershed

Land cover/land use	Extent (km ²)	Percentage (%)
Agriculture	0.19	2.26
Bare land	0.05	0.54
Built-up area	0.46	5.53
Forest	2.44	29.01
Grass land	0.04	0.49
Mixed-trees	4.78	56.96
Shrub	0.44	5.22
Total Area	8.39	100.00

Table 4-2 Land-use in St. John's Watershed

Land cover/land use	Extent (km ²)	Percentage (%)
Bare land	0.15	1.19
Built-up area	2.83	23.28
Forest	2.04	16.77
Grass land	0.20	1.66
Mixed-trees	6.22	51.12
Shrub	0.73	5.98
Total Area	12.18	100.00

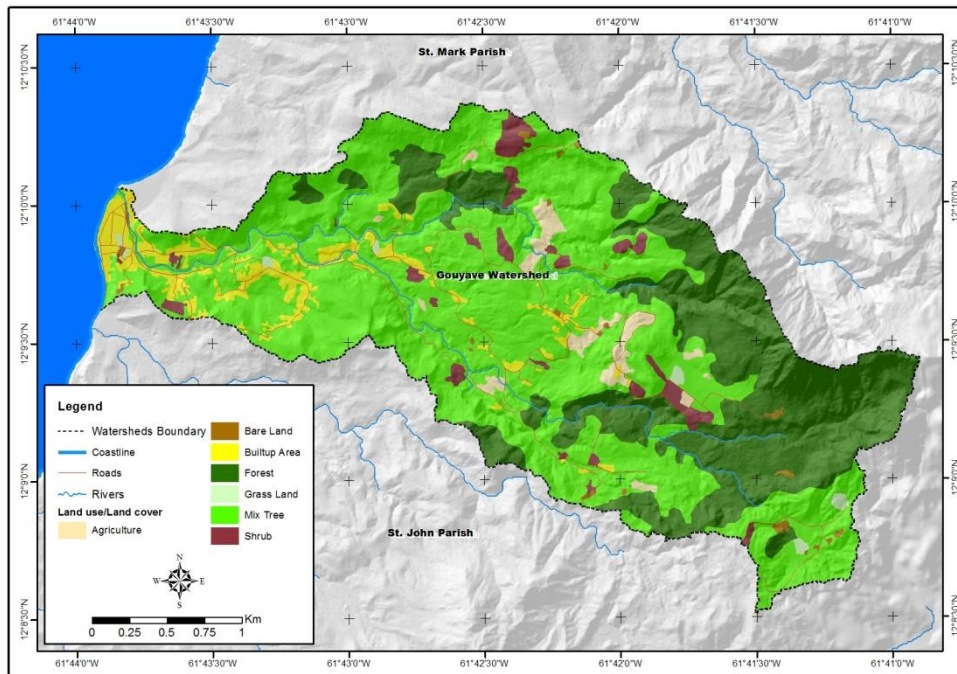


Figure 4-1 Land-use map of Gouyave watershed

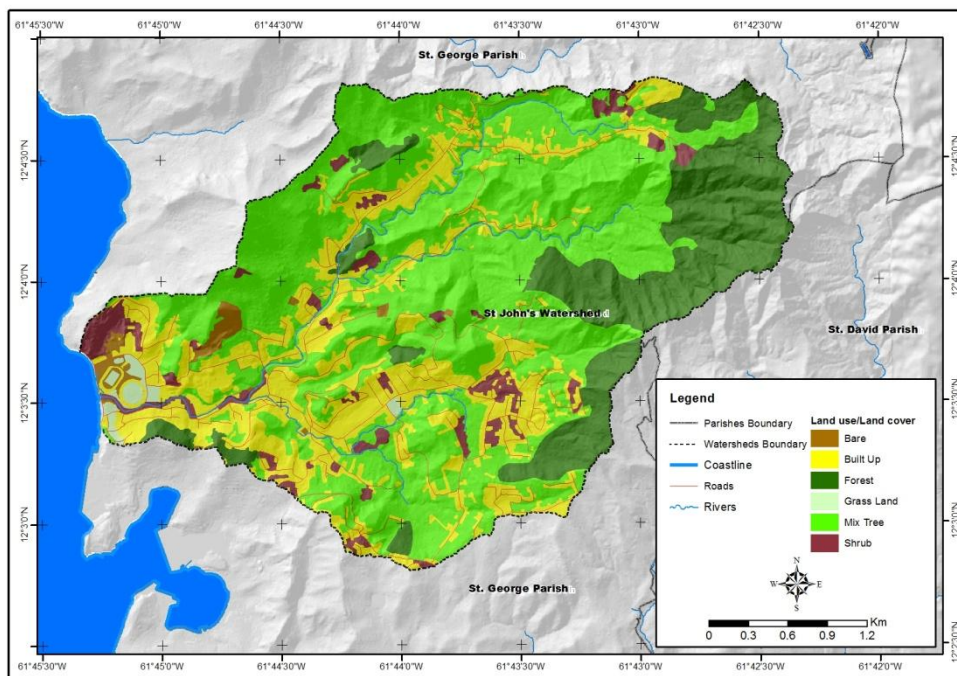


Figure 4-2 Land-use map of St. John's watershed

In order to get the best and appropriate interpretation from satellite imagery, it is required for assessing the accuracy of the classification result. The reference (ground-truth) data were taken during the fieldwork. All of references points are taken on each land-use type. Total samples that used for land-use accuracy assessment for St. John's watershed were 80 samples, whereas there were 55 samples for Gouyave watershed. The value of overall accuracy in Gouyave watershed is 80% and the value of overall accuracy in St. John's is 86, 25%. The complete results of overall accuracy analysis can be shown at **Table 4-3** and **Table 4-4**.

Table 4-3 Overall Accuracy of Land-use in Gouyave watershed

Preliminary Classification	Ground Checked Classification/Reference Data							Row Total
	Agriculture	Bare Land	Built Up	Forest	Grass Land	Mix Tree	Shrub	
Agriculture	1	1	0	0	0	0	0	2
Bare Land	2	2	0	0	0	0	0	4
Built Up	0	0	4	0	0	0	0	4
Forest	0	0	0	7	0	0	0	7
Grass Land	0	0	0	0	3	0	0	3
Mix Tree	3	0	0	3	0	25	1	32
Shrub	1	0	0	0	0	0	2	3
Column Total	7	3	4	10	3	25	3	55

Overall accuracy = $((1+2+4+7+2+25+2)/54) \times 100\% = 80.00\%$

Table 4-4 Overall Accuracy of Land-use in St. John's watershed

Preliminary Classification	Ground Checked Classification/Reference Data						Row Total
	Bare	Built Up	Forest	Grass Land	Mix Tree	Shrub	
Bare	4	1	0	0	0	0	5
Built Up	0	6	0	0	0	0	6
Forest	0	0	10	0	1	0	11
Grass Land	0	0	0	4	0	0	4
Mix Tree	0	2	0	1	38	6	47
Shrub	0	0	0	0	0	7	7
Column Total	4	9	10	5	39	13	80

Overall accuracy = $((4+6+10+4+38+7)/80) \times 100\% = 86.25\%$

4.2 Soil physical properties

Soil characteristics, consist of saturated hydraulic conductivity and porosity, is the key role in determining the flood modelling. These characteristics affect to the rate/level of run-off water which is infiltrate into the soil. The infiltration rates are influenced by the characteristics of land use and soil types. It is implied that the differences of land use and soil types have a relation one to another and it will be determined also the infiltration rate and volume of run-off.

4.2.1 Analysis of soil properties in relation to land use types

The analysis of soil properties consist of two parameters, saturated hydraulic conductivity (Ksat) and porosity. The saturated hydraulic conductivity (Ksat) is the rates of water to infiltrate in the soil. Ksat value is influenced with the distribution and space of soil pore (Prachansri, 2007). Generally, a natural landscape or land use, such as forest and mixed-trees, has high value of Ksat. It is due to land with natural vegetation is not cultivated or intervened by human activities. The arrangements of heavy machinery ploughing and tillage change the soil pores, make the soil compact, and it decrease the hydraulic conductivity (Prachansri, 2007). If the Ksat value is decreased, the infiltration is decreased too. The vegetation roots in forest usually combine from fibrous roots and taproots, which fibrous roots are very support to increase the water infiltration into the soil. It means that the infiltration rates will be high and

stable. That condition is different with developed area/built-up area. Ksat values usually less because of soil compaction and other activities. It means the less infiltration rates. Soil infiltration affects surface run-off. The water volume that can be absorbed in the soil decrease the volume of surface run-off.

Soil porosity is void spaces between soil particles in a unit volume of material (Nimmo, 2004). The soil particles are determined in soil particle shape and its arrangements. Nimmo (2004) also explains that the diversity of soil particle shapes, sizes, and their arrangement make the porosity value decrease. If soil porosity is less, the soil infiltration capacity would be high. Means and standard deviation values of Ksat that area determined by land use or land cover types, can be informed at this following table.

Table 4-5 Means and Standard Deviation of Ksat and Porosity for Difference Land Use Types

Land use	n	Ksat (mm/hr)		Porosity(cm ³ /cm ³)	
		Mean	Sd	Mean	Sd
Agriculture	4	205.36	341.78	0.62	0.03
Bare Land	2	27.86	21.21	0.53	0.06
Forest	20	158.43	116.23	0.64	0.08
Grass Land	3	55.00	54.60	0.61	0.03
Mix Tree	59	150.05	154.38	0.56	0.06
Shrub	9	112.42	175.30	0.53	0.03

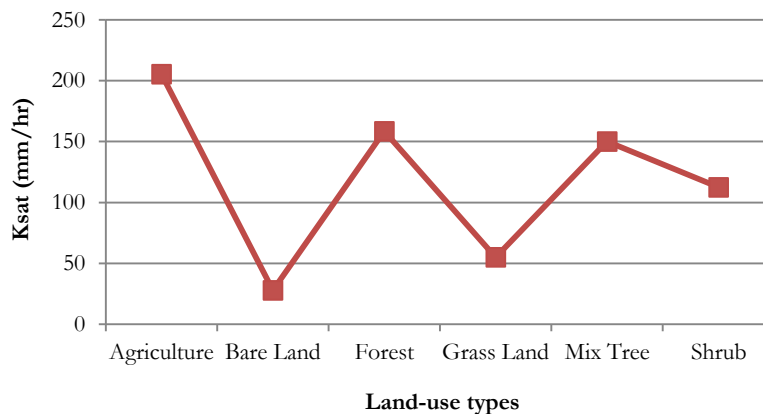


Figure 4-3 Means of Ksat values in different land use types

Table 4-5 shows means and standard deviation of Ksat mean values based on each land use type. Ksat and porosity values in different on land-use types are varied that can be shown from their means and its distribution. Generally, the uncultivated lands, such as forest, mix-tree, and shrub have high value of Ksat means and the cultivated lands, such as bare land and grass land have low value of Ksat mean. The Ksat values of uncultivated areas are more than 100 mm/hour) and the cultivated areas are less than 100 mm/hour.

Figure 4-3 shows all of Ksat mean values. It shows that the differences between Ksat mean values among land-use types in this research area are very high and dramatically. The highest Ksat mean is agriculture lands, and the lowest is bare land. However, the Ksat mean value of agriculture area is very different and highest than other. Ksat mean value of agriculture lands is 205.36 mm/hour. This value is the average value of four measured Ksat values in agriculture areas, so there is outlier data, so that the Ksat mean values of agriculture lands have low value and high value. The distribution data of Ksat agriculture lands can be seen at **Figure 4-4a**. The highest Ksat mean value of agriculture land (205.36

mm/hour) can be explained by the many organic materials in top-soil of agriculture lands, such as vegetation roots and leaves that are stored in the soil.

In addition, most of standard deviation (Sd) values of each land use types are near the values of Ksat mean. It means that the most of data in each land use types are distributed normally, except agriculture lands, shrub, and grass land (see **Figure 4-4a**). However, the standard deviation (SD) of agriculture lands is highest than other (341.78 mm/hour). It indicates that the data distribution is far from the average values of Ksat. Thus, it is required to conduct data calibration of Ksat value because the uncertainty of the Ksat means value. Besides agriculture land, the distribution data of shrub and grass land are not distributed normally, but the standard deviation values are not different with Ksat mean values.

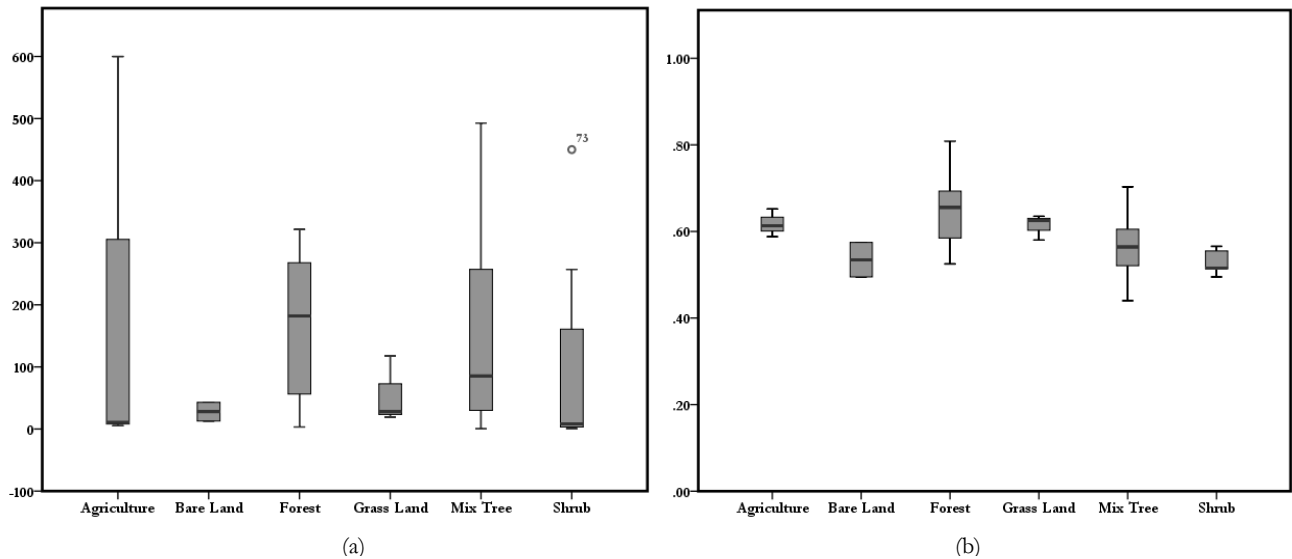


Figure 4-4 Ksat boxplot (a) and porosity boxplot (b) based on land-use types

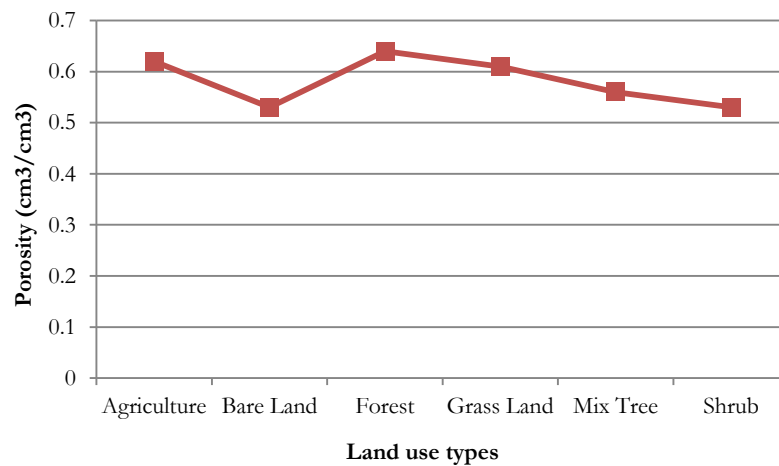


Figure 4-5 Means of porosity values in different land use types

Related with porosity, generally, mean porosity values per each land use types are almost same and it is not very different for each other's (see **Table 4-5**). Mean of porosity for each land use types are 0.53 until 0.64. Forest has the highest value of mean and standard deviation of porosity. Mean of porosity value of forest

is 0.64 and their standard deviation is 0.08. Generally, the average values of porosity for each land use types are almost equal; with the difference values are between 3-11 cm³/cm³ (see **Figure 4-5**).

The distribution data of porosity values per each land use types show in **From Figure 4-4.b**. Almost of porosity data per each land uses are distributed normally. The highest mean value of forest porosity (0.64) is due to there are diversities in soil structure shapes and its arrangements. From mean of porosity values can be shown that agricultures lands, forest, and grass land have the lower infiltration rates than bare land, mix-tress, and shrub.

4.2.2 Analysis of soil properties in relation to soil types

Analysis of soil properties (Ksat and porosity) also conducted based on soil types. It is important to identify the relationship between soil type characteristics to Ksat and porosity. Generally, Ksat and porosity values in different soil types are enough varied. **Figure 4-6** shows the porosity values for each soil textures and it can be shown the difference values between all of soil types. The highest mean of porosity is Belmont clay loam (stony and boulder phase) with 428.57 mm/hour, but it is only represented by 1 soil samples (see **Table 4-5**). The highest mean value of Belmont is caused by there are many organic materials, such as vegetation roots and leaves that are stored in the soil.

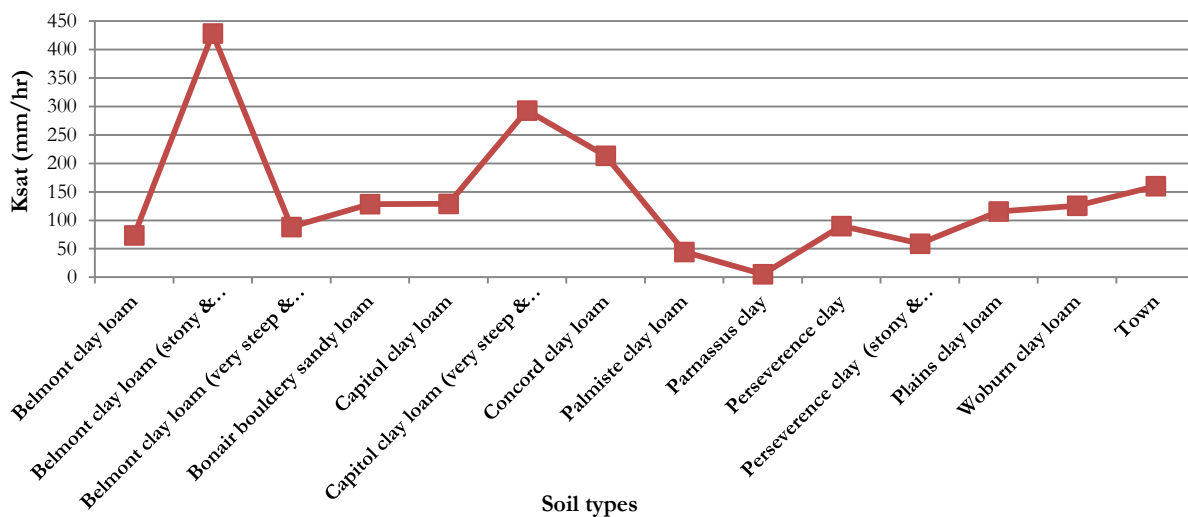


Figure 4-6 Means of Ksat values in different soil textures

Table 4-6 Mean and Standard Deviation of Ksat and Porosity for Difference Soil Types

Soil Textures	n	Ksat (mm/hr)		Porosity (cm ³ /cm ³)	
		Mean	Sd	Mean	Sd
Belmont clay loam	6	73.66	56.76	0.55	0.05
Belmont clay loam (stony & bouldery phase)	1	428.57	0	0.54	0.00
Belmont clay loam (very steep & shallow phase)	12	88.34	86.27	0.60	0.06
Bonair bouldery sandy loam	2	128.57	151.52	0.49	0.04
Capitol clay loam	13	129.06	123.53	0.64	0.05
Capitol clay loam (very steep & shallow phase)	13	293.04	200.53	0.67	0.07
Concord clay loam	12	213.62	173.48	0.56	0.05
Palmiste clay loam	2	44.46	9.85	0.52	0.00
Parnassus clay	1	5.36	0	0.56	0.00

Soil Textures	n	Ksat (mm/hr)		Porosity (cm ³ /cm ³)	
		Mean	Sd	Mean	Sd
Perseverance clay	4	90.00	96.24	0.50	0.03
Perseverance clay (stony & bouldery phase)	4	59.00	54.25	0.60	0.02
Plains clay loam	4	115.71	129.07	0.52	0.02
Woburn clay loam	19	125.79	166.23	0.56	0.06
No information	4	160.18	198.3	0.55	0.06

In addition, **clay-loam textures** in research area, consist of Belmont clay loam, Belmont clay loam (very steep & shallow phase), capitol clay loam, capital clay loam (very steep & shallow phase), concord clay loam, plains clay loam, and Woburn clay loam). They have more than 100 mm/hour of Ksat mean. Then, Ksat mean values of the **clay textures** (perseverance clay and perseverance clay (stony & boulder phase)) are less than 100 mm/hour, but it is only parnassus clay that has the lowest mean of Ksat (5.36 mm/hour).

Almost of Ksat standard deviations are lower than their mean values (**Table 4-6**). Data distribution of Ksat can be shown at **Figure 4-7a**. Almost of data distribution of Ksat value is distributed normally, except some soil textures which only ha 1-2 soil samples and the data are not represented the each soil texture. They are belmont clay loam (stonny and boulder phase), palmiste clay loam, and parnassus clay.

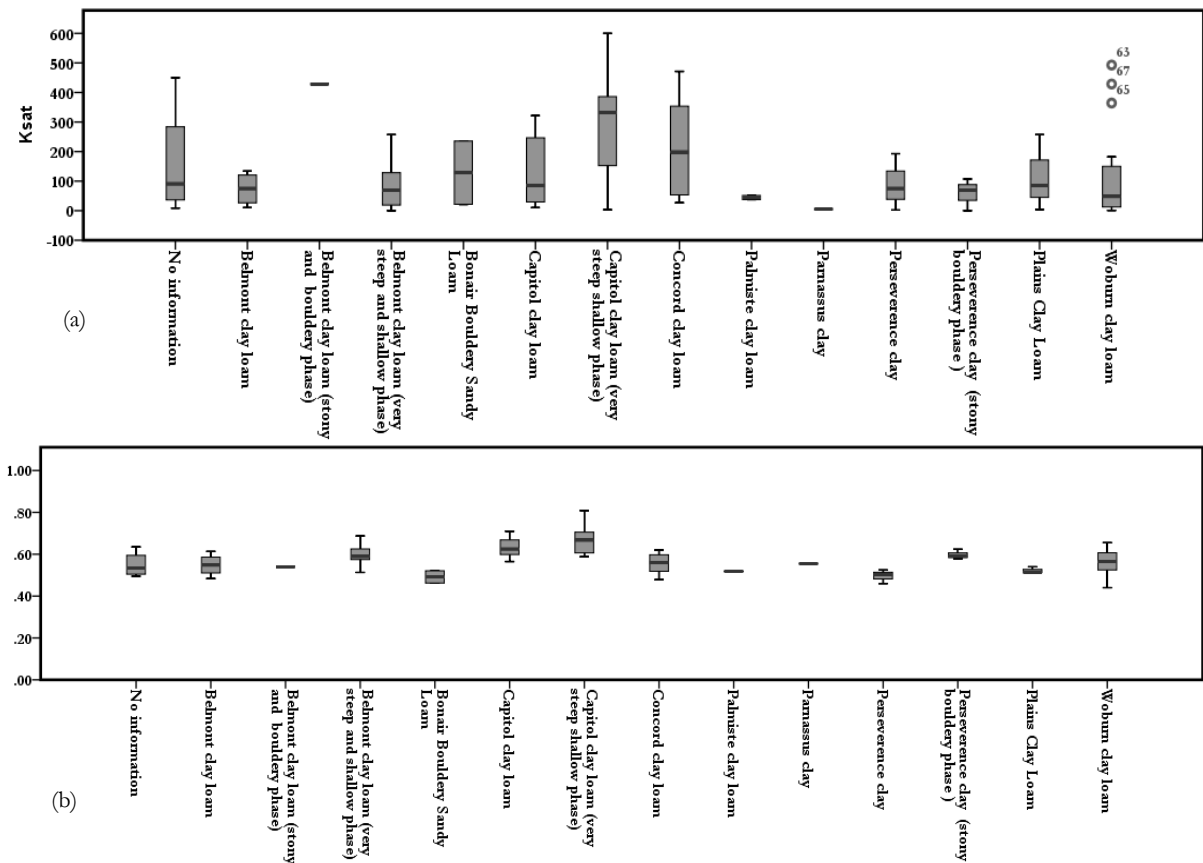


Figure 4-7 Ksat boxplot (a) and porosity boxplot (b) based on soil types

Besides Ksat, **Table 4-6** also shows the porosity values of soil textures. Generally, from the results of porosity mean values, all of clay-loam soil textures have higher values than clay and sandy soil. The mean

porosity values of clay-loam are between 0.49 until 0.67. The lowest of porosity mean value is sandy soil (Bonair boulder sandy loam) because it has un-fragmented soil fractures and formed from sandy textures and the porosity of sandy soil is the lowest than other (CCA, 1991). Then, mean of porosity value for each soil textures are not high differences. It can be shown from **Figure 4-8**. Related with distribution data of porosity, most of porosity values data per each soil textures are distributed normally (see **Figure 4-7b**).

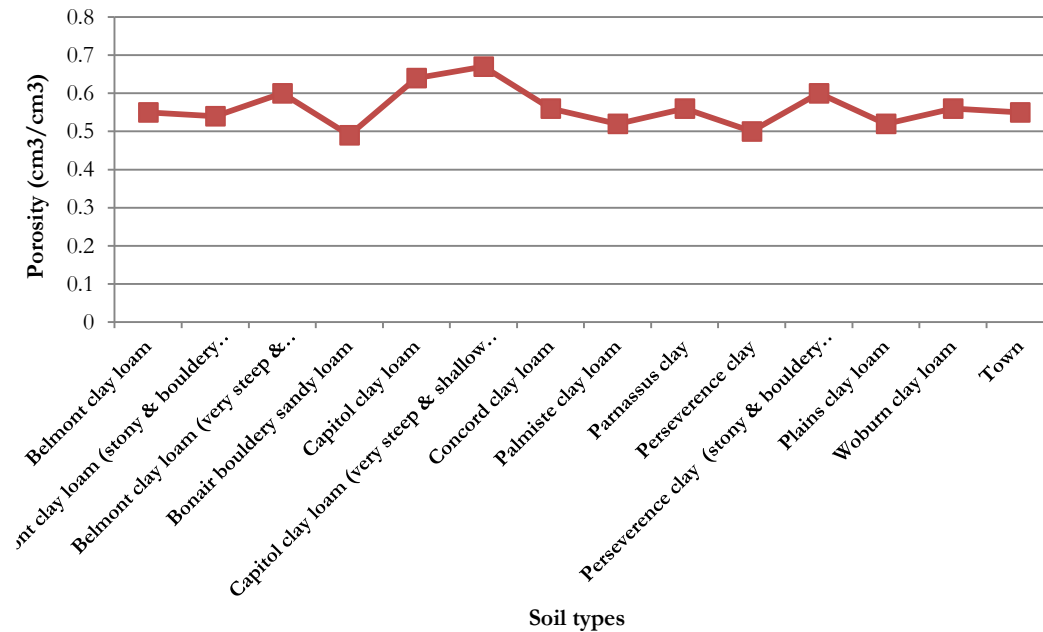


Figure 4-8 Means of porosity values in different soil types

Based on the field observation and statistical analysis, it can be concluded that Ksat and porosity values based on land-use types are more variance. The top-soil conditions in those two watersheds contain a lot of organic materials, which are possible influenced by land-use activities. Thus, they are better be related to soil properties in the field than Ksat and porosity values based on soil types. In order to get the best accuracy and representative values of Ksat and porosity in flood model and to reduce the uncertainty values, it is required to ignore the outlier values from Ksat and porosity values.

4.3 Rainfall

The extreme rainfall is the most influencing factor to flood events. In flood modelling, it is required to assess and predict the extreme rainfall and its influences to the run-off and flood events. The assessment of extreme rainfall in research area was used to predict the return period of rainfall based on rainfall history data. Besides that, the Gumbel method was used to describe the occurrence probability of extreme rainfalls and identify the distribution of extreme values. The result of Gumbel distribution in this research can be shown at **Figure 4-9**.

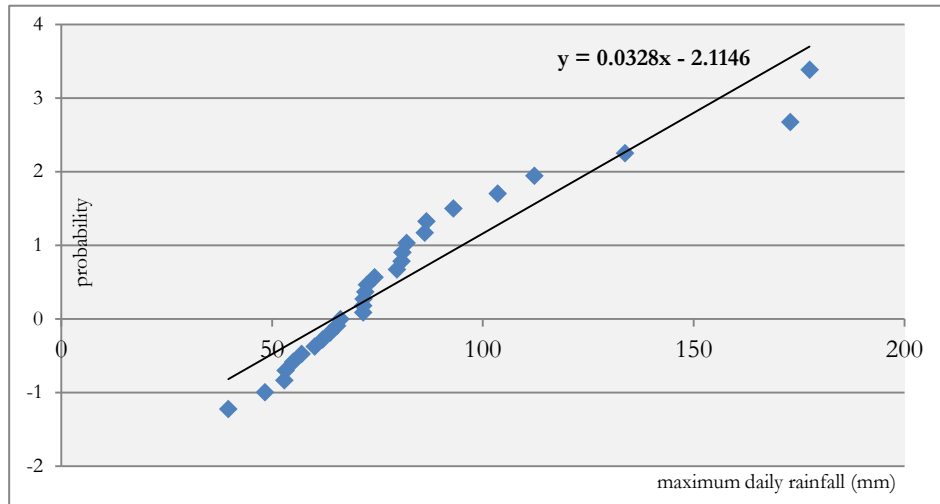


Figure 4-9 Gumbel Distribution

Table 4-7 Return Periods and Maximum Daily Rainfall

Return Period (years)	Right prob	Left prob	$y = -\ln(-\ln(\text{left prob}))$	Max daily rainfall (mm)
2	0.50	0.50	0.37	75.64
5	0.20	0.80	1.50	110.20
10	0.10	0.90	2.25	133.08
35	0.03	0.97	3.54	172.42
100	0.01	0.99	4.60	204.72

Based on **Table 22**, can be concluded that:

- 2 years return periods represent maximum daily rainfall in 2013. The maximum daily rainfall in 2013 (75.64) includes in low-categories of rainfall. In this year, flood events occurred in some locations of Grenada, but it did not give the great damage impacts.
- 35 years return period represent maximum daily rainfall in 2011. Maximum daily rainfall in 2011 is used as a event-based conditions. In 2011, occurred some damage floods in Gouyave watershed area and St. John's watershed area. Based on these reasons, rainfall intensity in 2011 use as the basic data for conducting data calibration and data validation in this research.
- 100 years return periods represent the most extreme conditions to identify and assess the potential flood areas which are caused by the most extreme rainfall condition.

In order to analyze the flood behaviors in two watershed areas, Gouyave watershed and St. John's watershed, it was used 3 return periods based on the probability of storm events and extreme events. Those 3 years return periods, such as 2 years return period, 35 years return period, and 100 years return period. However, the 5 years return periods and 10 return periods are only used to identify how is the sensitivity of watersheds to response flood events.

Because of the limitation of information about rain intensity for flood modelling, this assessment was used by the 24-hour rain synthetic rainfall distributions intensity method as was developed by Natural Resources Conservation Service/Soil conservation service (NRCS/SCS), United States of America. They developed four synthetic rainfall distributions known as type I, IA, II, and III based on the storm and geographic regions that resulted in variety of rainfall intensity. Type IA is the least intense and type II the

most intense short duration rainfall which represent various regions of the United States, while Types I and IA represent the Pacific maritime climate with wet winters and dry summers. Type II represents the rest of the country, and Type III represents Gulf of Mexico and Atlantic coastal areas where tropical storms bring large 24-hour rainfall amounts. Based on the climate characteristics, type III the most appropriate distribution in Grenada. The rainfall intensity with different return periods can be shown at **Figure 4-10**.

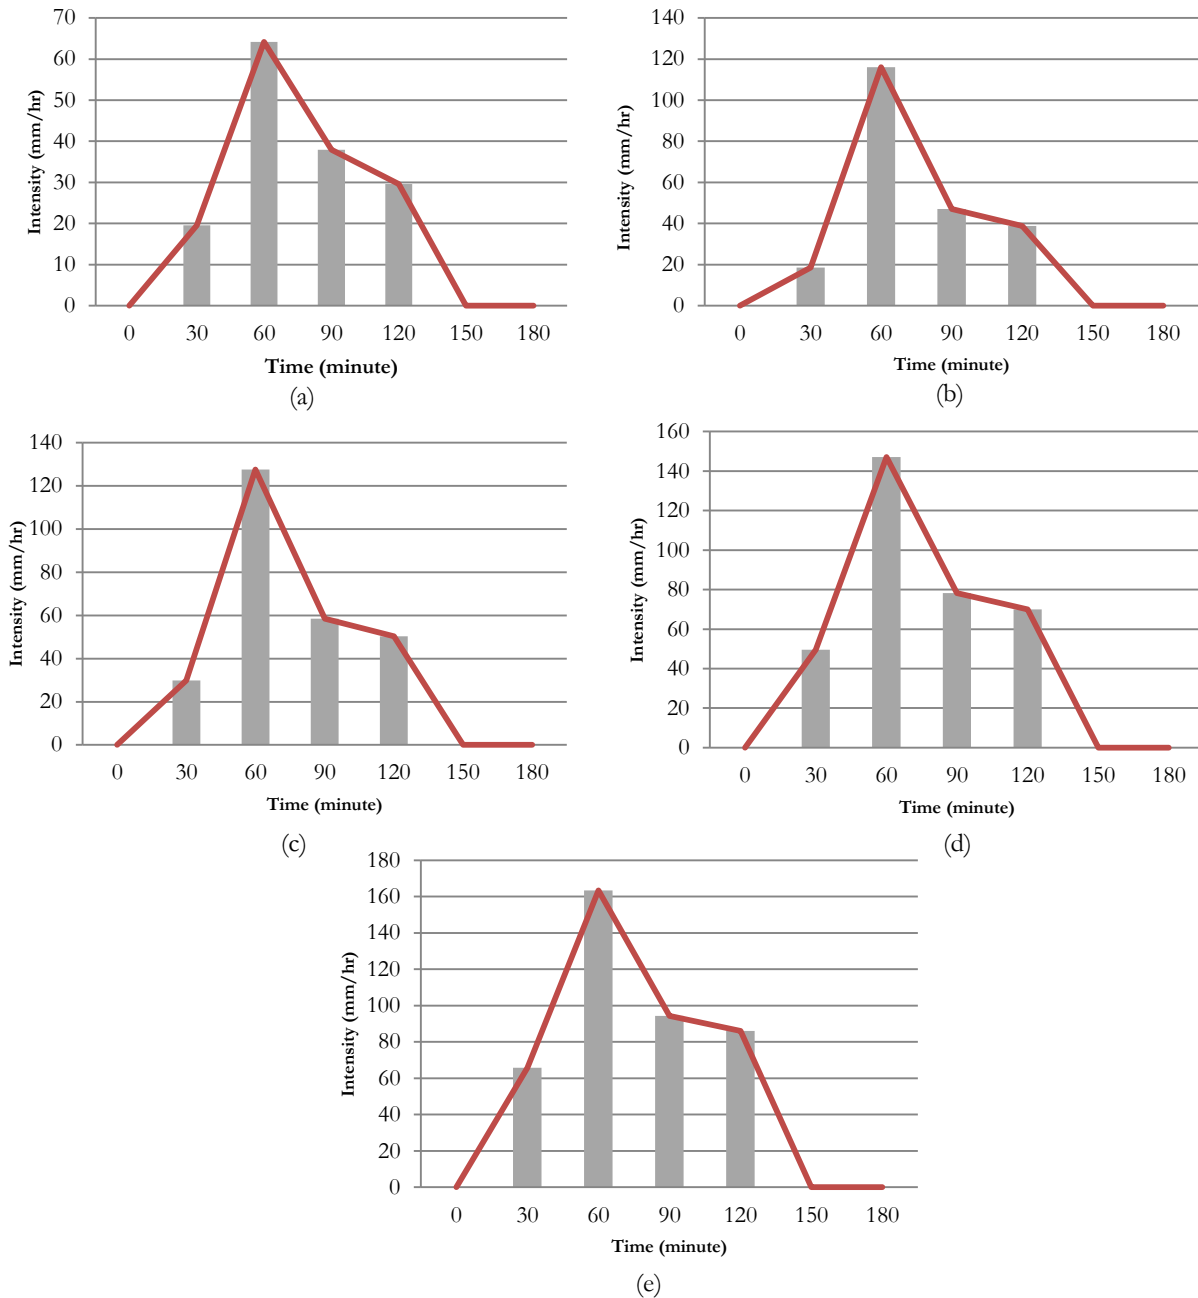


Figure 4-10 The rainfall intensity in (a) 2 years return period; (b) 5 years return period; (c) 10 years return period; (d) 35 years return period; and (e) 100 years return period

5. FLOOD MODELLING

5.1. LISEM Input Data

In this research, there were several basic maps which is derived as input map, such as the Digital Elevation Model (DEM). The Digital Elevation Model (DEM) was created based on the interpolating contour line from topographic map. It was derived using ILWIS 3.3 and its resolution is 5 meters. This map was rasterized to 20 meters resolution before analyzing. Beside DEM, the flood modelling in this research used Ksat maps, initial moisture maps (Thethai1.map), surface roughness maps (n.map), and random roughness maps (rr.map). These maps are generated from land-use map.

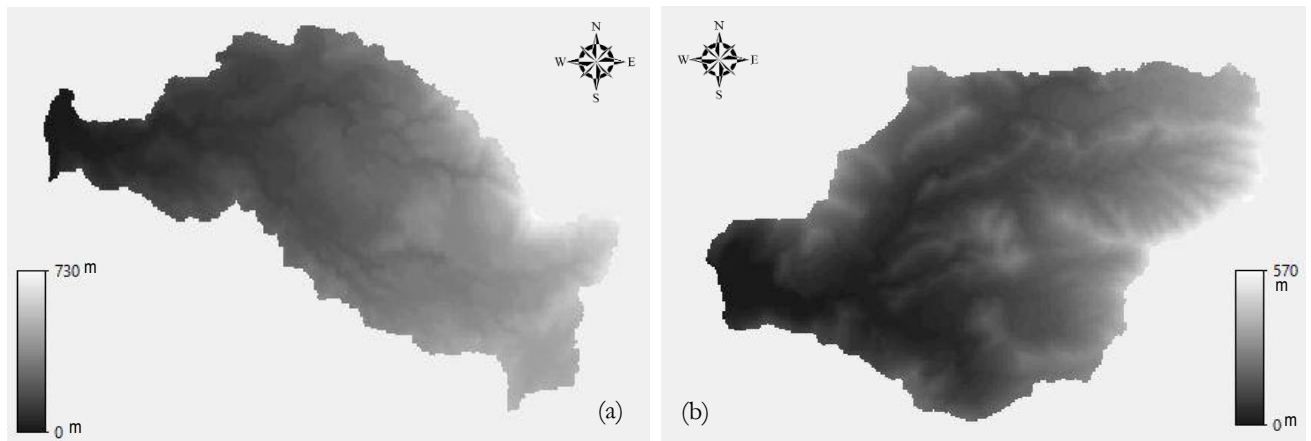


Figure 5-1 (a) DEM map Gouyave watershed and (b) DEM map of St. John's watershed

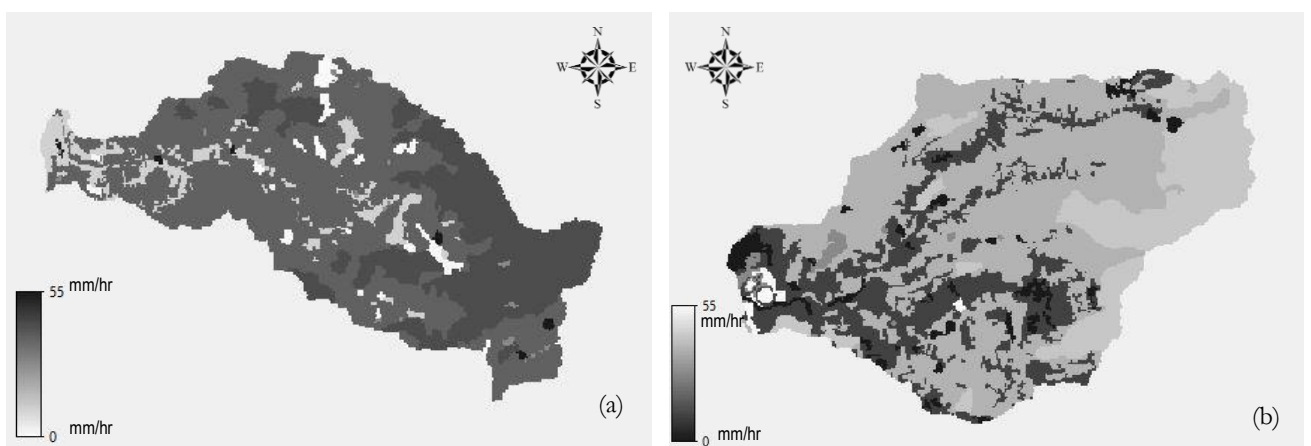


Figure 5-2 (a) Ksat map Gouyave watershed and (b) Ksat map of St. John's watershed

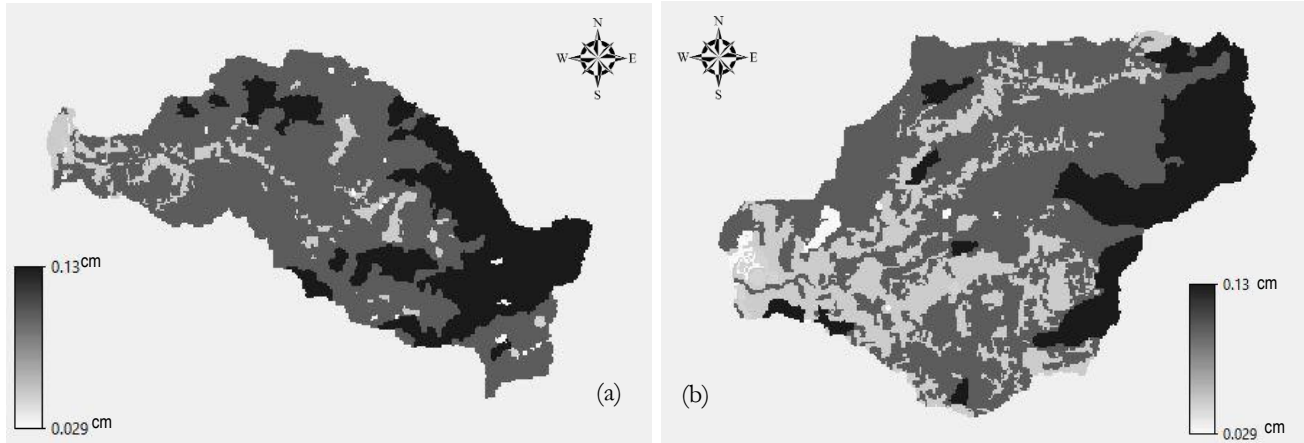


Figure 5-3 (a) N.map Gouyave watershed and (b) N.map of St. John's watershed

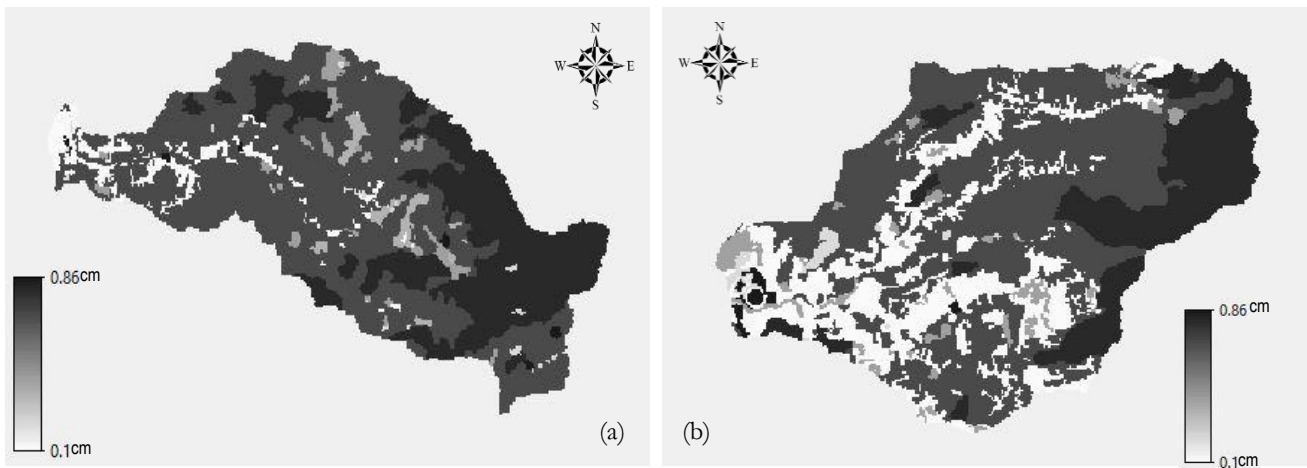


Figure 5-4 (a) PER.map Gouyave watershed and (b) PER.map of St. John's watershed

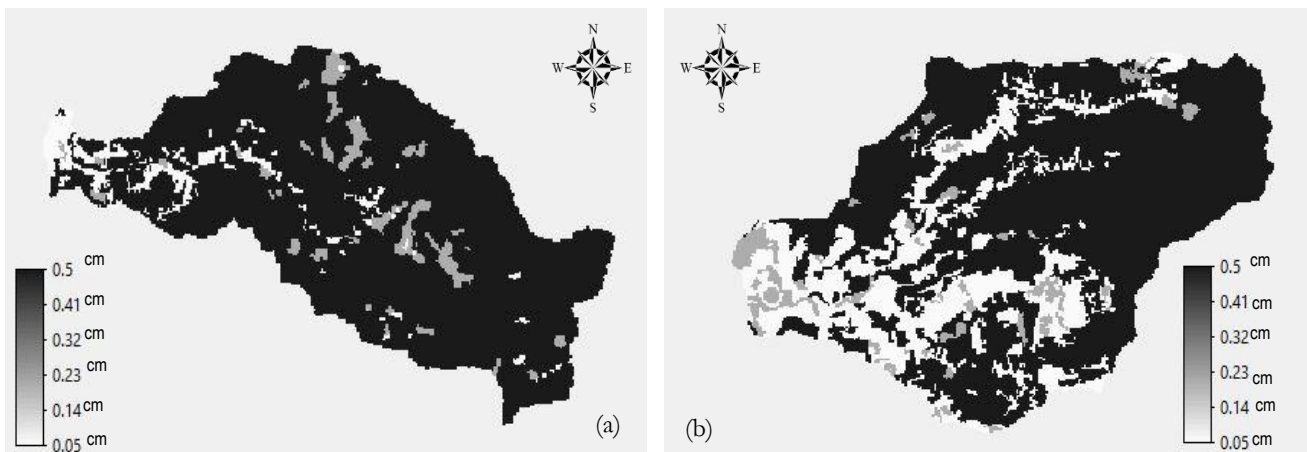


Figure 5-5 (a) RR.map Gouyave watershed and (b) RR.map of St. John's watershed

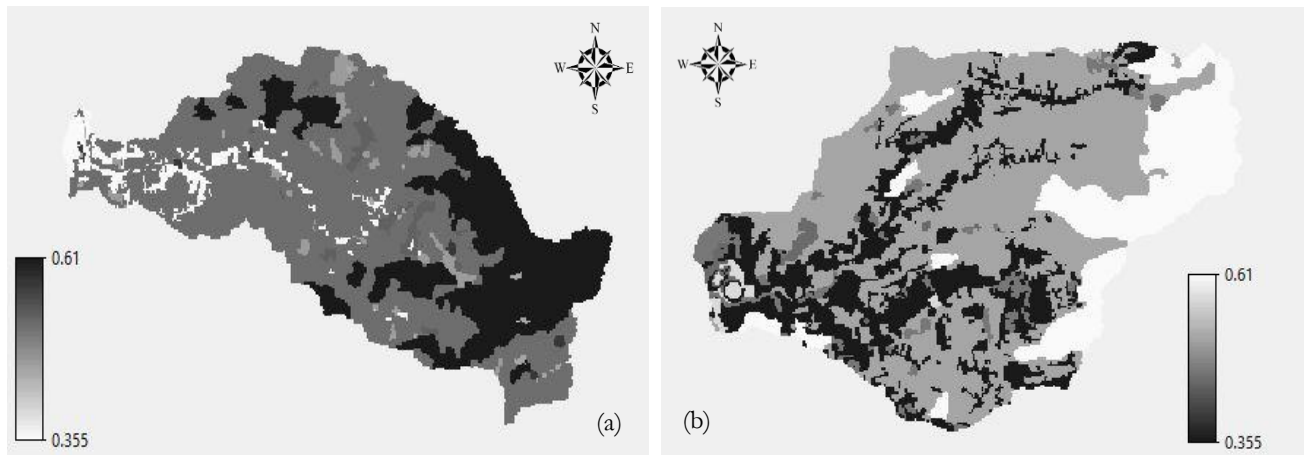


Figure 5-6 (a) Thetai1.map Gouyave watershed and (b) Thetai1.map of St. John's watershed

This research conducted flood model in two watershed areas. In this modelling, it is only used the input data from Gouyave watershed. Furthermore, the parameters were used for developing flood model in Gouyave watershed, they were adapted to develop the flood model of St. John's watershed. It is used for validating data. Then, this flood model used two layers to reduce the uncertainty values of Ksat and porosity, as important parameters for LISEM flood model, because they had high values. During the fieldwork, soil samples were taken from top-soil, which contain a lot of organic materials. Those organic materials such as roots and leaves that are stored in the soil, that are influenced by land-use activities. Thus, they did not represent soil types. In flood model, the first layer was obtained Ksat and porosity from field observation, while the second layer was obtained them from literature.

5.2. Sensitivity Analysis

The sensitivity analysis was used to find-out the parameter that would have the most influence on the modelling output results. Then, it can be known the uncertainty of the calibrated parameters (De Roo, A.P.J. & Jetten, V. , 1999). The sensitivity of each parameter might be depending on the other parameters level (Jetten, in Pedzisi, 2010). The several parameters were calibrated, including:

- The saturated hydraulic conductivity (Ksat);
- Initial soil moisture;
- Surface roughness (manning's n);
- Random roughness;
- Fraction coverage.

A process to identify the parameter sensitivity is changing and combining the used parameters to flood modelling. These simulations were conducted once by symmetrically and uniformly subtracting 25% from and adding 25% to the parameter values. This value could be represented the significant value of variance per each parameter. Then, change and combination result from those parameters were evaluated with considering the run-off (flood) characteristics, such as peak discharge, total discharge, infiltration, flood maximum, and flood area. The sensitivity assessment for those parameters can be shown at **Table 5-1**.

Table 5-1 Results of Sensitivity Analysis
(peak discharge, total discharge, flood max, and flood area) in percentage (%)

Parameters	Sensitivity Analysis														
	Peak discharge (%)			Total discharge (%)			Infiltration (%)			Flood Max (%)			Flood area (%)		
	Add 25%	Sub 25%	Var	Add 25%	Sub 25%	Var	Add 25%	Sub 25%	Var	Add 25%	Sub 25%	Var	Add 25%	Sub 25%	Var
Ksat	-20.87	14.97	35.84	-22.44	25.14	47.57	12.60	-14.78	27.38	-76.82	11.36	88.18	-43.27	31.25	74.52
Initial moisture	7.60	-22.80	30.40	8.54	-20.00	28.54	-4.94	11.48	16.42	4.55	-21.82	26.36	12.50	46.63	59.13
Surface roughness (n)	-6.71	4.07	10.79	-0.49	0.41	0.90	0.45	-0.50	0.96	-2.27	0.00	2.27	-6.25	4.33	10.58
Random roughness	0.20	-0.09	0.29	0.14	-0.17	0.32	-0.08	0.09	0.18	0.00	0.00	0.00	0.48	0.00	0.48
Fraction coverage	-0.09	1.56	1.65	-0.20	0.49	0.69	-0.07	0.19	0.25	0.00	0.00	0.00	-0.48	2.40	2.88

The detail of sensitivity analysis graphic and its description can also be shown as follows:

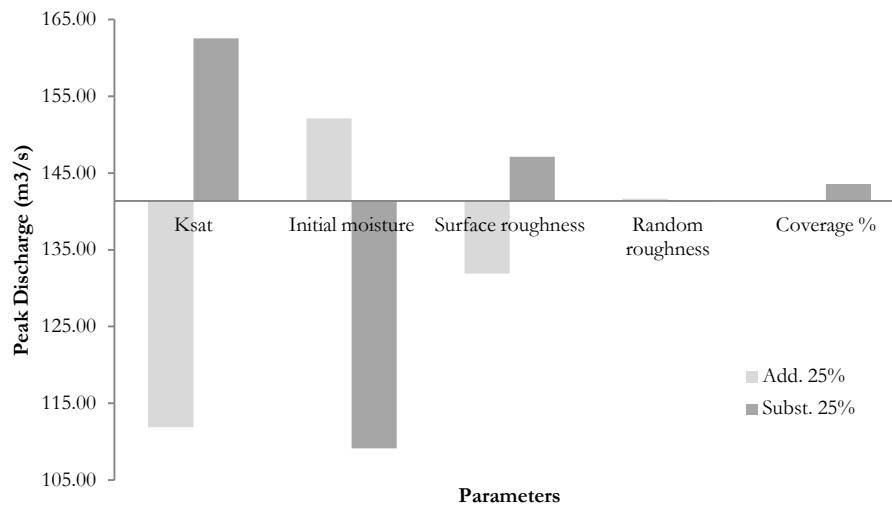


Figure 5-7 The sensitivity level of parameters to peak discharge

Between addition and subtraction of 25% parameter value, Ksat shows high sensitivity towards **peak discharge** with variance about 35.84%, followed by initial moisture with variance 30.40% and surface roughness with variance about 10.79% as shown in **Figure 5-7**. Changes of random roughness and fraction coverage value only give a little effect and seems insensitive to peak discharge with variance near zero. Random roughness and fraction coverage are less sensitive with variance about 0.29% and 1.65%.

Figure 5-8 shows the most sensitive parameters to both (a) **total discharge** and (b) **total infiltration** characteristics are Ksat and initial moisture. Ksat is the most sensitive parameter which influence total discharge and infiltration value with variance about 47.57% and 27.38%. The second sensitive parameter is initial moisture with variance about 28.54% for total discharge and 16.42% for infiltration. In conclusion, Ksat and initial moisture are the parameters which directly influence to total discharge and infiltration. Consideration about finding the right value of Ksat and initial moisture is needed to optimize flood modelling in order to make the most accurate model. Infiltration show straight relation with Ksat value, infiltration increase as Ksat value raise and decrease the possibility of flood, while the other sensitive initial moisture show inverse relation towards infiltration, as shown in the table, the increase of initial moisture value about 25% resulted in -4.94% infiltrations which increase possibility of flood.

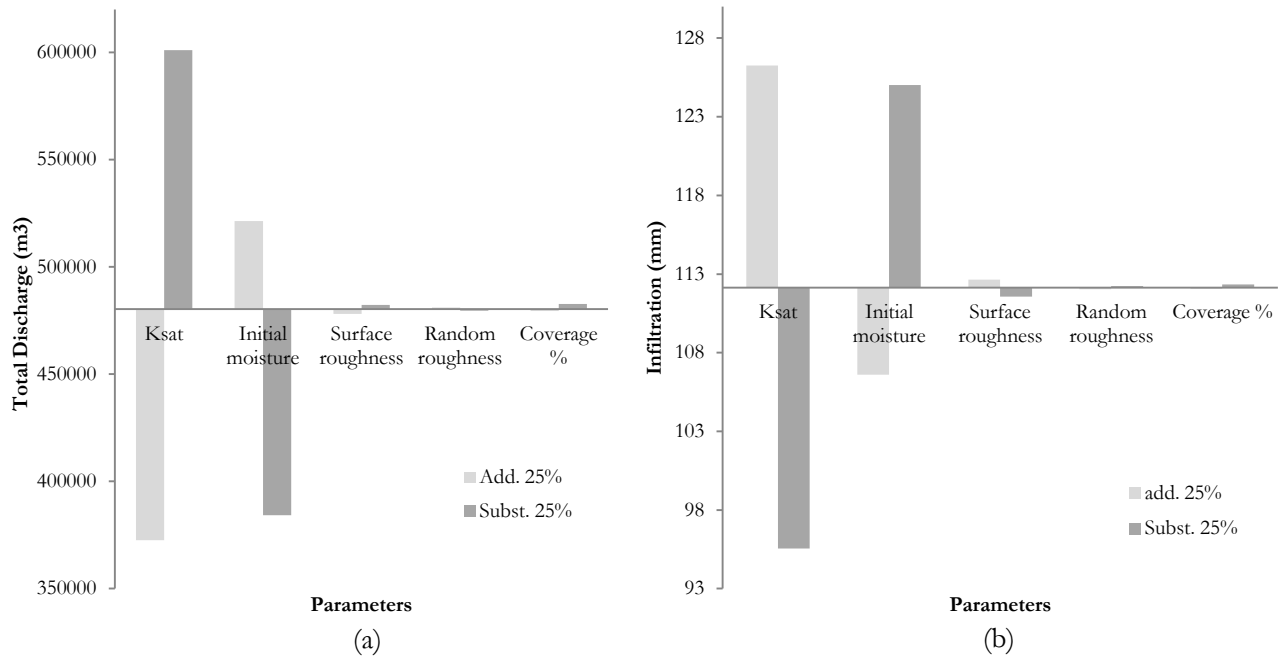


Figure 5-8 The sensitivity level of parameters to total discharge (a) and total infiltration (b)

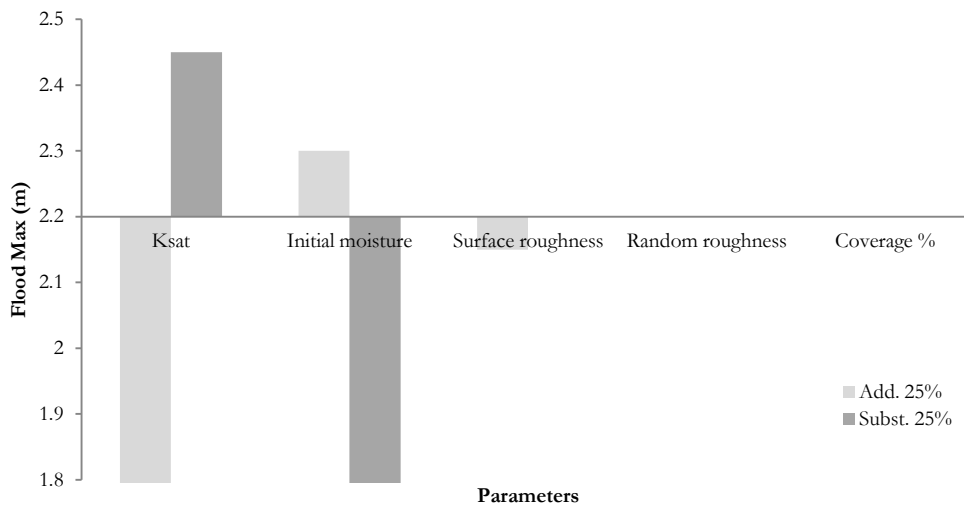


Figure 5-9 The sensitivity level of parameters to flood depth max

Figure 5-9 shows that Ksat, initial moisture and surface roughness parameters are sensitive in the influence of **flood depth maximum**, with variance of each parameter about 88.18%, 26.36%, and 2.27%. With the same percentage change among those parameters, Ksat value changes significantly showing that Ksat is the most sensitive parameters. The change of Ksat value show inverse relation with flood depth max, the higher value of Ksat decreased possibility of flood.

Among those parameters, the largest **flood area** may occur from the change of Ksat for it higher sensitivity variance about 74.52% than Ksat with variance 59.13% and surface roughness 10.58%. However, the other parameters such as random roughness and fraction coverage have not significant changes to flood area.

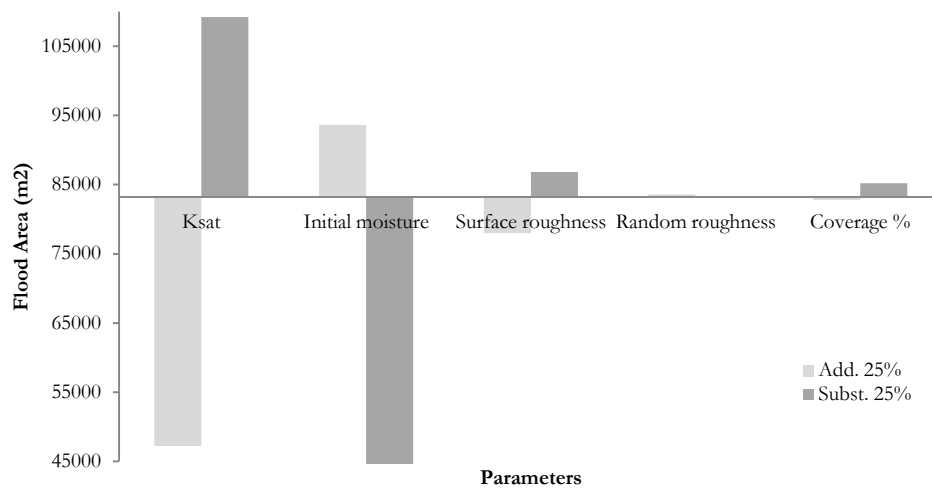


Figure 5-10 The sensitivity level of parameters to flood area

Based on this sensitivity analysis, flood characteristics are influenced by the saturated hydraulic conductivity (Ksat), initial moisture, and surface roughness. However, Ksat and initial moisture are the most sensitive parameters because the values of flood characteristics is very different when Ksat and initial moisture values are increased or decreased. Then, surface roughness is also sensitive, but it is lower than Ksat and initial soil moisture. These parameters should be examined as accurately as possible to get the most appropriate flood model predictions. Ksat and initial moisture that give high impact to flood probability is in line with some former assessments and experiments about flood modeling (Prachansri, 2007; De Roo, A.P.J. and Jetten, 1999, and De Roo, et al, 1996).

The model seems to be insensitive with random roughness parameter and fraction coverage, proven that by the change about 25% addition and reduction of those parameters resulted in nearly same value, close to zero. The addition and subtraction 25% value only give small influence for peak discharge; total discharge, infiltration, and flood max and flood area as shown in **Table 5-1**.

5.3. Model Calibration and Validation

Hessel (2002) highlighted that the calibration process is required to obtain the acceptable of predictive results and increase the research quality. In this research, flood model calibration was conducted by minimizing the deviation between the results of the flood modelling and the observed flood data, flood depth and flood extent. The flood depth data was obtained from interviews during fieldwork, but flood extent data cannot be collected. Furthermore, the flood calibration was done based on flood depth. Flood depth data was taken from flash-flood events in 2011. The 2011 used as current situation and it is used to assess the accuracy of flood depth predictions. During fieldwork, researcher only collected 5 flood depth points. These points were selected based on the result of interview about flood depth maximum in flood event at 2011. Then, researcher conducted manual measurements using measurement-tape. This was conducted due to the difficulties to obtain information about flood depth levels in two watersheds. Almost of citizen in those two watershed areas explained that there are several times of flood events in 2011, but the information about the exactly time and flood depth when flood occurred, could not explain by those citizen. Thus, the five points and it locations can be seen at **Table 5-2**.

Table 5-2 Flood depth points and locations in Gouyave watershed and St. John's watershed

Nu	Location	Latitude	Longitude	Flood Depth Measurement (m)
1	Gouyave Watershed	12° 10' 2.862" N	61° 43' 49.561" W	1.2
2		12° 9' 58.956" N	61° 43' 48.492" W	0.5
3		12° 9' 58.126" N	61° 43' 48.265" W	0.3
1	St. John's Watershed	12° 3' 27.340" N	61° 45' 7.055" W	0.7
2		12° 3' 21.170" N	61° 44' 19.498" W	0.4

In this research, first calibration process was conducted in flood model of Gouyave watershed. It is conducted first because Gouyave watershed has 3 point measurements, while St. John's watershed only has 2 point measurements. In addition, the diversity of land-use types in Gouyave watershed is considered also. Land-use types in Gouyave watershed are more diverse than St. John's watershed. The three sensitive parameters (which are mentioned in **section 5.2**) were used as calibration parameters. Six sets of parameter-value combinations were used for each simulation are given below.

Table 5-3 Result of Model Calibration

Land-use Types	Initial			Trial 1			Trial 2			Trial 3			Trial 4			Trial 5 (Mix)		
	K	P	M	K	P	M	K	P	M	K	P	M	K	P	M	K	P	M
Agriculture	10.714	0.585	0.05	8.034	0.585	0.05	8.034	0.585	0.05	8.034	0.585	0.05	8.034	0.585	0.05	10.714	0.585	0.08
Bare land	27.86	0.495	0.03	27.86	0.495	0.03	27.86	0.495	0.03	27.86	0.495	0.03	27.86	0.495	0.03	12.86	0.495	0.023
Built-up Area	10	0.4	0.05	10	0.4	0.05	10	0.4	0.05	10	0.4	0.05	10	0.4	0.05	10	0.4	0.03
Forest	42.857	0.677	0.13	158	0.677	0.13	47.14	0.677	0.13	158	0.578	0.13	47.14	0.578	0.13	69.643	0.578	0.1
Grass land	55	0.635	0.046	23.57	0.635	0.046	23.57	0.635	0.046	23.57	0.58	0.046	23.57	0.58	0.046	19.29	0.58	0.023
Mix tree	37.5	0.567	0.1	57	0.567	0.1	35.89	0.567	0.1	57	0.554	0.1	35.89	0.554	0.1	42.857	0.554	0.1
Shrub	0.536	0.513	0.1	15.96	0.513	0.1	15.96	0.513	0.1	15.96	0.51	0.1	15.96	0.51	0.1	15.96	0.51	0.04

K : Ksat

P : Porosity

M : Mannings

The initial simulation was the model simulation which is similar with model in sensitivity analysis. Trial 1 and trial 2 were conducted by changing the Ksat value. Ksat value in Trial 1 used the average of Ksat values and considered Ksat with high values. Trial 2 conducted by removing the highest Ksat value. Moreover, in trial 3 and trial 4, researcher combined the Ksat value in trial 1 and trial 2 with other porosity value. In the end, trial 5, it was conducted by combining those three parameters.

The results of model calibrations were evaluated by comparing between results model and observed data. Then, the model evaluation also conducted using the objective functions, including **model bias** and **Root Mean Square Error (RMSE)**. Bias is calculated from the differences of mean values between paired observed and simulated values. The best overall model performance is shown when bias values closer to zero. Brief overviews of these statistical measures are provided below.

Bias is calculated with:

$$\frac{\sum_{i=1}^n (y_i - x_i)}{n} \dots\dots\dots (5.1)$$

Where:

n : total number of observations

x_1 : the observed value

y_1 : the model-simulated value

Root Mean Square Error (RMSE) is a square root of average values of the squared prediction errors. RMSE is conducted to measure the discrepancy between model resulted values and observed values on an individual basis. Then, it can assess the performance of overall model. Because of quadratic terms, the larger discrepancies give the greater weight. It seems that the smaller value indicates the better model performance.

Root Mean Square Error (RMSE) is calculated with:

$$\sqrt{\frac{\sum_{i=1}^n (y_i - x_i)^2}{n - 1}} \dots\dots\dots (5.2)$$

Where:

n : total number of observations

x_1 : the observed value

y_1 : the model-simulated value

The result of model calibration from Gouyave watershed using Bias and RMSE can be shown at **Table 5-4**.

Table 5-4 Result of Model Calibration using Bias and RMSE

Nu	Latitude	Longitude	Flood depth (m)						
			Point measurement	Initial	Trial 1	Trial 2	Trial 3	Trial 4	Trial 5
1	12° 10' 2.862" N	61° 43' 49.561" W	1.2	1.200	0.440	1.180	0.440	0.000	0.900
2	12° 9' 58.956" N	61° 43' 48.492" W	0.5	1.080	0.000	1.010	0.000	0.000	0.460
3	12° 9' 58.126" N	61° 43' 48.265" W	0.3	1.030	0.000	0.940	0.000	0.000	0.270
Bias (Unit = meter)				0.437	0.520	0.390	0.520	0.667	0.123
RMSE (unit = meter)				0.776	0.934	0.682	0.934	1.317	0.303

Table 5-4 shows the **Trial 5** the best simulation for Gouyave watershed. The result of model calibration using Bias and RMSE of trial 5 are 0.123 and 0.303. The Bias value and RMSE value are the lowest than others and they close to zero. However, trial 4 is the worst combination for this model because the Bias value and RMSE value away from zero. Based on these calibrations, the configuration of trial 5 is used as model validation in St. John's watershed. This validation does not change data which was used in trial 5. The result of model validation in St. John's watershed follows at **Table 5-5**.

Table 5-5 Result of Model Validation using BIAS and RMSE

Nu	Latitude	Longitude	Flood depth (m)	
			Point measurement	Simulated point
1	12° 3' 27.340" N	61° 45' 7.055" W	0.7	0.800

Nu	Latitude	Longitude	Flood depth (m)	
			Point measurement	Simulated point
2	12° 3' 21.170" N	61° 44' 19.498" W	0.4	0.160
Bias (Unit = meter)				0.170
RMSE (unit = meter)				0.260

From **Table 5-5** can be seen that Bias value (0.170) and RMSE value (0.26). It could be concluded that this model has the best performance.

5.4. Comparison of flood characteristics based on the difference return periods

In this section, the flood characteristics are developed using difference return periods. Rainfall data which are used as calculated using Gumbel method. It was explained in Table 22 in **section 4.3**. The flood model comparison was conducted to analyze the flood characteristics in two watersheds area, Gouyave watershed and St. John's watershed. The comparison result of flood characteristics in two watershed areas can be shown at **Table 5-6**.

Table 5-6 Comparison of flood characteristics in Gouyave watershed and St. John's watershed for 3 different return periods

Flood characteristics	2 years return period		35 years return period		100 years return period	
	Gouyave	St. John's	Gouyave	St. John's	Gouyave	St. John's
Peak discharge (m ³ /s)	3.89	26.40	110.99	119.76	150.59	134.82
Total discharge (m ³)	20791.63	86591.38	387064.16	458750.14	579248.98	636098.37
Average discharge (m ³)	2478.14	7109.30	46133.98	37664.21	69040.40	52224.82
Q/P (%)	3.26	9.42	27.21	31.10	35.60	41.11
Total infiltration (mm)	72.47	67.92	124.46	109.77	131.10	114.68
Max flood depth (m)	0.00	0.00	1.74	3.35	2.25	3.40
Average flood depth (m)	0.00	0.00	0.17	0.68	0.40	0.70
Max flood duration (min)	0.00	0.00	345.00	96.00	350.00	106.00
Average flood duration (min)	0.00	0.00	66.35	28.14	54.840	41.80
Max flood propagation (min)	0.00	0.00	86.00	64.00	112.00	72.00
Average flood propagation (min)	0.00	0.00	63.76	53.87	62.41	51.73
Flood volume (m ³)	0.00	0.00	12805.56	109846.42	42803.23	142377.00
Flood area (m ²)	0.00	0.00	41600.00	146000.00	94400.00	186000.00

From **Table 5-6** show that peak discharge in St. John's watershed is extremely high, specifically in 2 years return period than peak discharge in 35 years and 100 years return period. This is probably caused by the capacity of channel in 2 years return period can hold all of run-off, so there is no flood event occur in St. John's (see **Figure 5-10**). From this hydrograph, peak discharge in St. John's watershed is higher than in Gouyave watershed. The difference of peak discharge in those watersheds is very high. In the Gouyave watershed, peak discharge is lower, but the duration of run-off is longer with lower run-off volume (Q/P). However, peak discharge in St. John's watershed is very high, but the duration of run-off water is faster and run-off volume is higher (Q/P) than in Gouyave watershed. This condition is due to the rainfall

intensity in 2 years return period is categorized in low class, so it does not enough influence and affects to flood events.

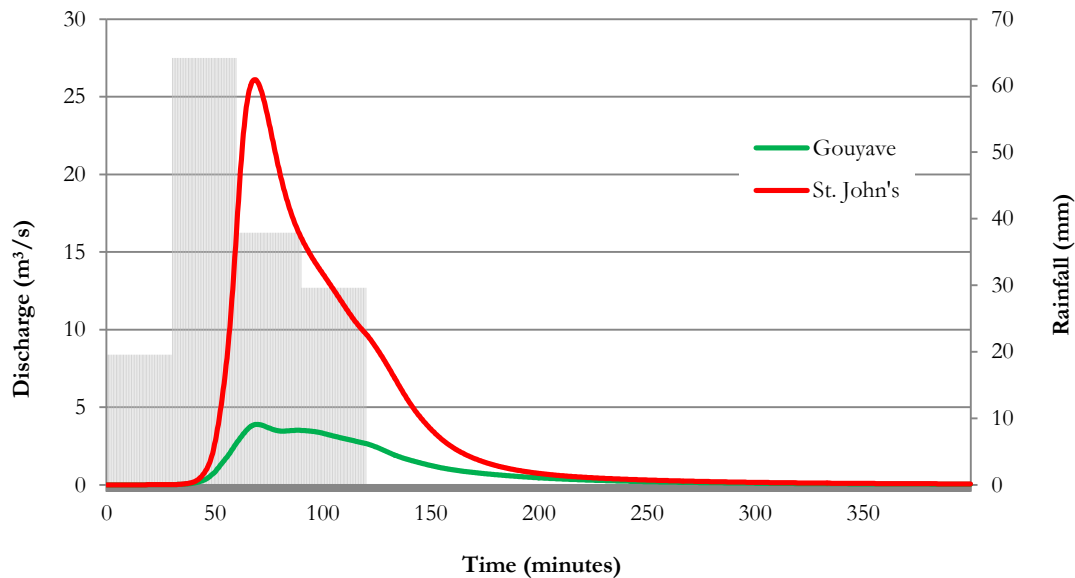


Figure 5-10 Simulated discharge of Gouyave watershed and St. John's watershed in 2 years return period

Figure 5-11 shows the hydrograph of Gouyave watershed and St. John's watershed in 35 years return period. The hydrograph of St. John's watershed is wider than Gouyave watershed. Peak time of Gouyave watershed (64 minutes) is faster than St. John's watershed (70 minutes). The St. John's simulated discharge is wider than Gouyave watershed. It means the discharge duration of St. John simulated discharge is longer than Gouyave. It also shows St. John's watershed has more flood than Gouyave. The difference in reaching peak discharge in those two areas is also caused by the differences of total area that are affected to flood.

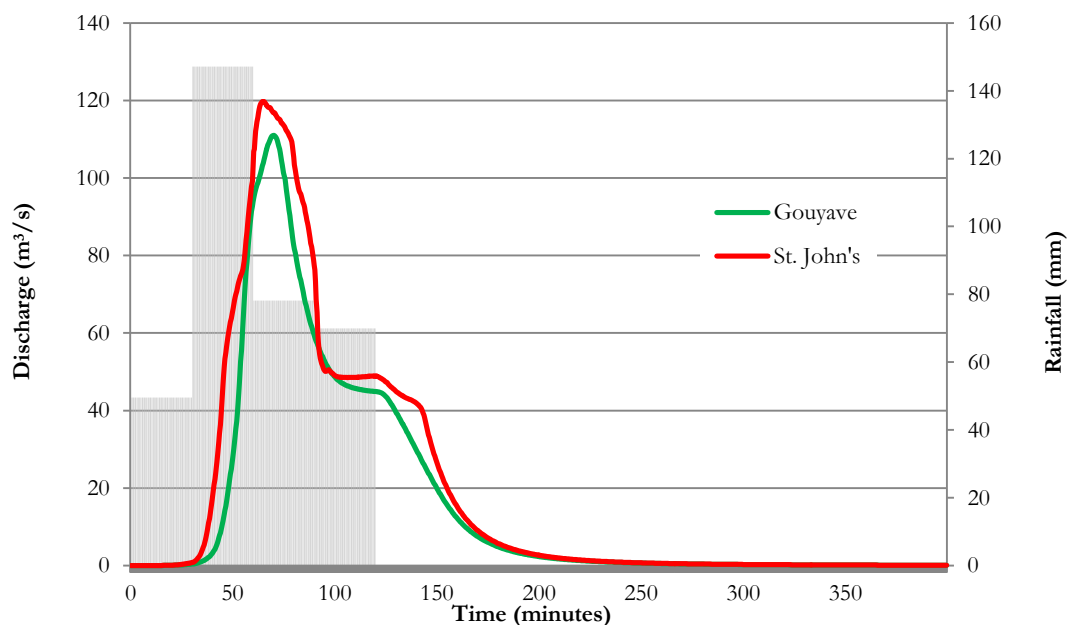


Figure 5-11 Simulated discharge of Gouyave watershed and St. John's watershed in 35 years return period

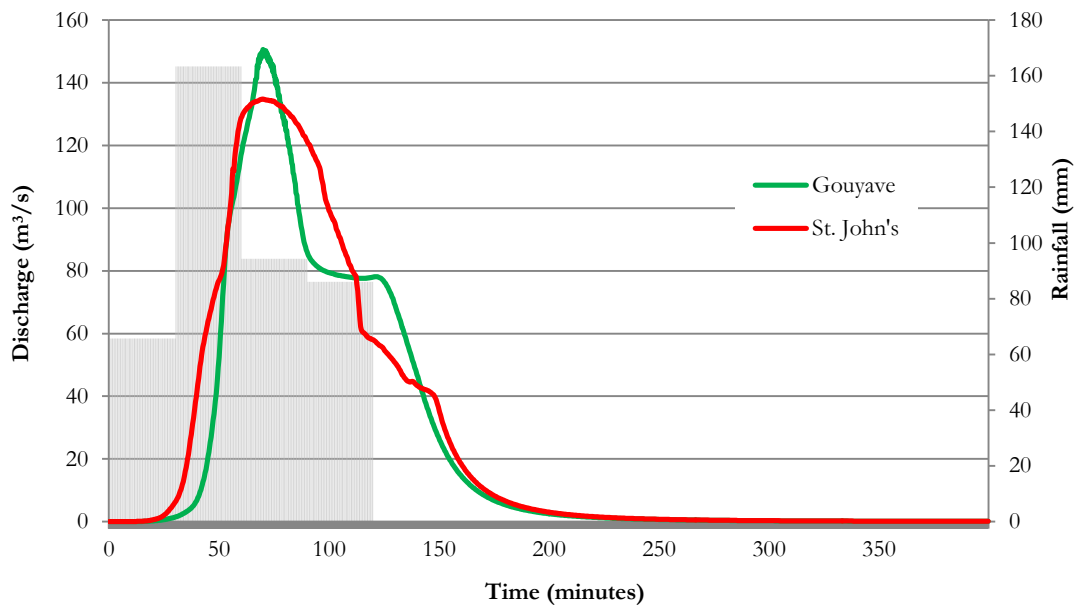


Figure 5-12 Simulated discharge of Gouyave watershed and St. John's watershed in 100 years return period

The hydrograph in **Figure 5-12** shows that peak discharge in St. John's watershed is lower than Gouyave watershed. This hydrograph also conclude the overflow water on channel is more increase in St. John's watershed and it makes flood events in 100 years return period will be more massive.

Related with total discharge, total discharge in St. John's watershed for 3 different return period (2, 35, and 100 years) is higher than total discharge in Gouyave watershed, specifically total discharge in 2 years return period. It is caused by the St. John's watershed have larger area than Gouyave watershed. It means that St. John's has more catchment areas and it have bigger potential run-off than Gouyave watershed.

Moreover, the maximum flood depth in St. John's watershed in 35 years return period (3.350 m) and 100 return period (3.40 m) are higher than maximum flood depth in Gouyave watershed 1.74 m and 2.25 m). Flood depth map can be shown at **Figure 5-13 until Figure 5-16**. The maximum flood duration in St. John's watershed in those two return periods are lower than Gouyave watershed, but the maximum flood propagation in St. John's watershed for 2 different period is faster than Gouyave watershed. It is caused by (1) the basin shape in the upperparts of St. John's watershed is more round than basin shape in Gouyave watershed. It makes water from multiple locations in the upstream of St. John's watershed flow run-off water and it is more likely to arrive at the same time in downstream areas. It makes the flood depth in St. John watershed is higher and the propagation time in St John's watershed is faster than Gouyave watershed. Because the flood propagation time in St. John's is faster, the durations of flood that is inundated this areas is not for a long time (2) most of area in St. John's watershed is dominated with steep-slope. It makes run-off velocity is faster than run-off water in flat-slope. It makes the run-off water arrive faster in downstream areas. Thus, from this explanation, it can be concluded that St. John's watershed which has highest total discharge and peak discharge, it also has higher maximum flood depth, shorter duration of flood, and faster propagation time.

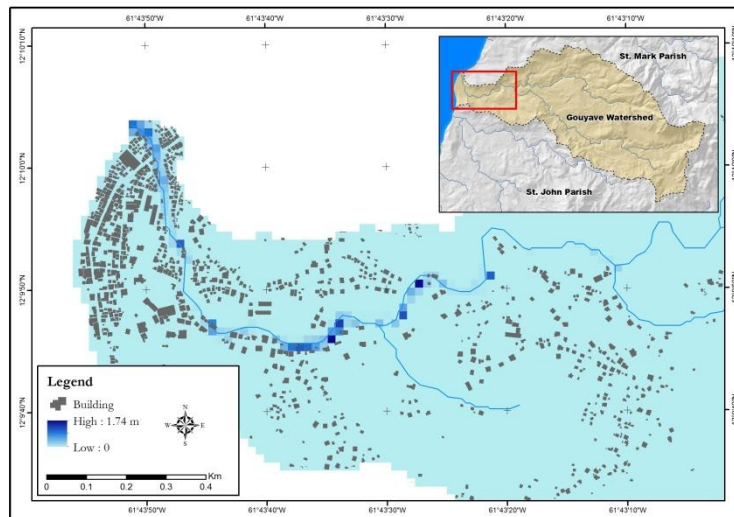


Figure 5-13 Flood depth in Gouyave watershed at 35 years return period

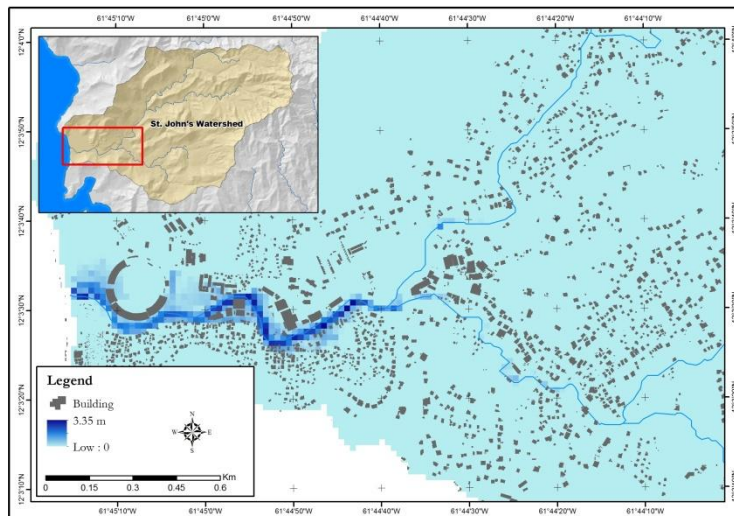


Figure 5-14 Flood depth in St. John's watershed at 35 years of return period

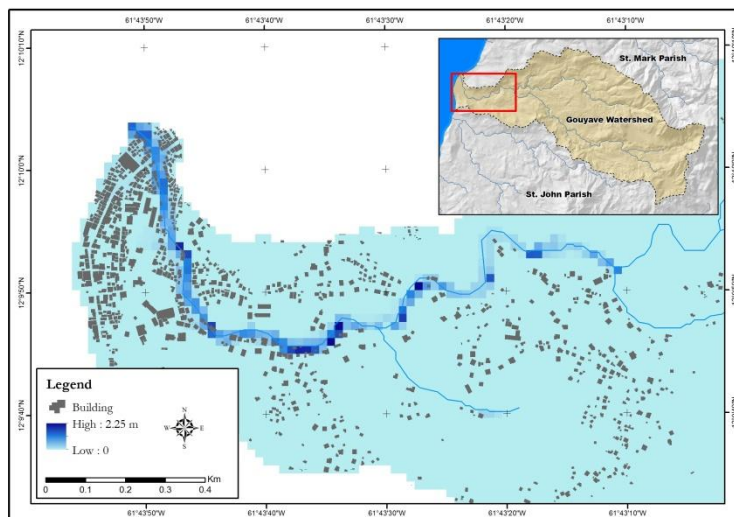


Figure 5-15 Flood depth in Gouyave watershed at 100 years return period

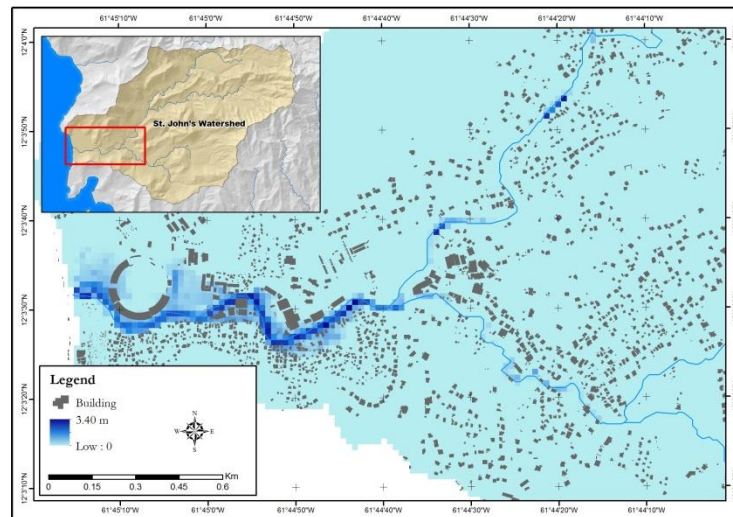


Figure 5-16 Flood depth in St. John's watershed at 100 years return period

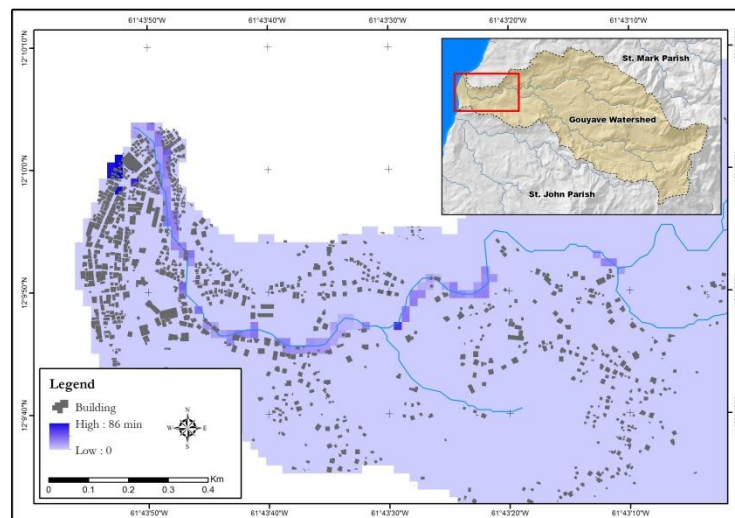


Figure 5-17 Flood propagation time Gouyave watershed at 35 years of return period*

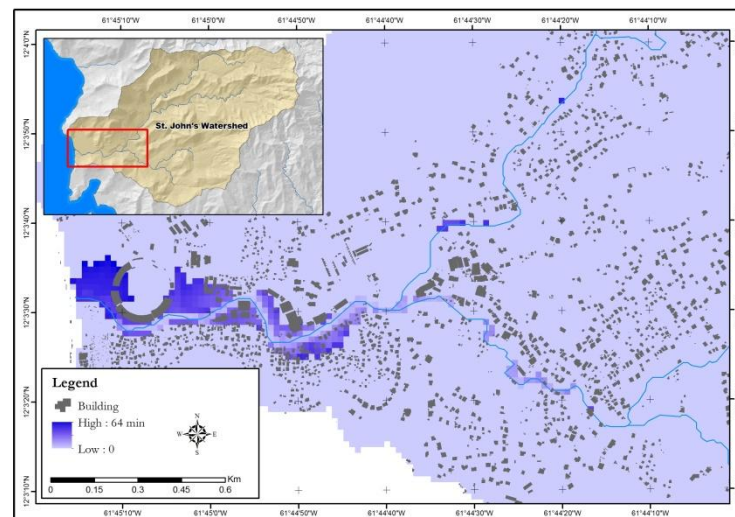


Figure 5-18 Flood propagation time in St. John's watershed at 35 years return period*

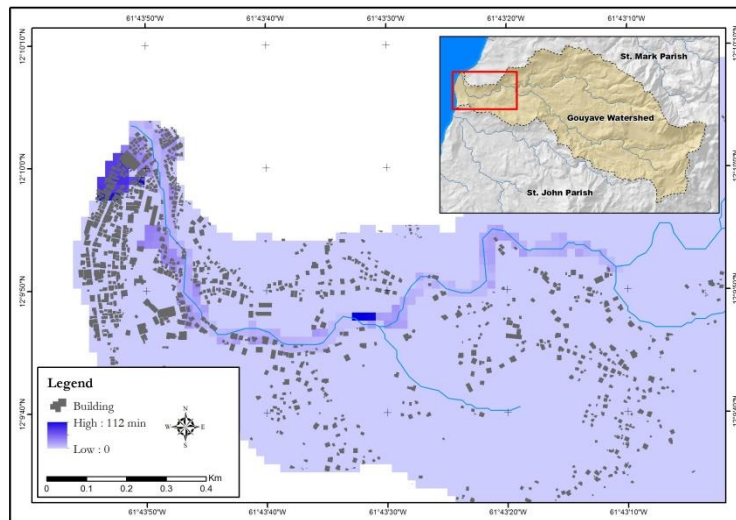


Figure 5-19 Flood propagation time Gouyave watershed at 100 years of return period*

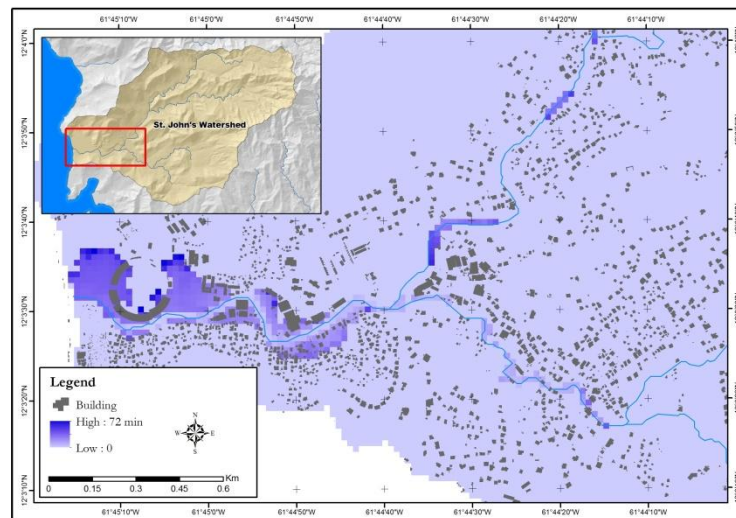


Figure 5-20 Flood propagation time in St. John's watershed at 100 years return period*

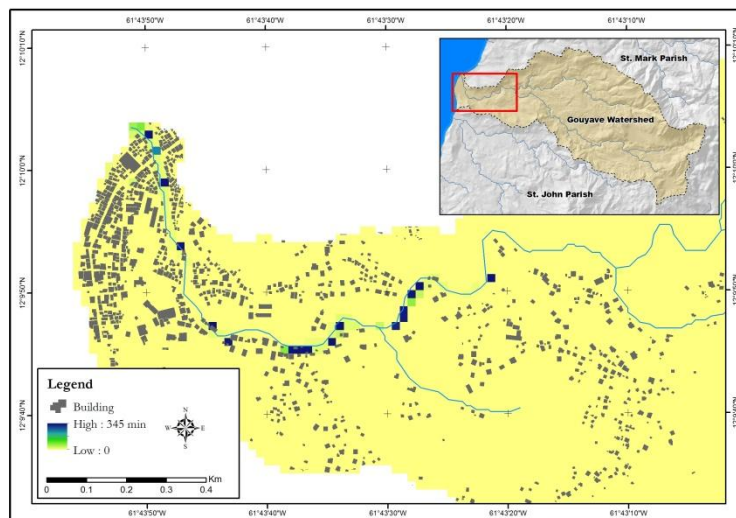


Figure 5-21 Flood duration time in Gouyave watershed at 35 years of return period*

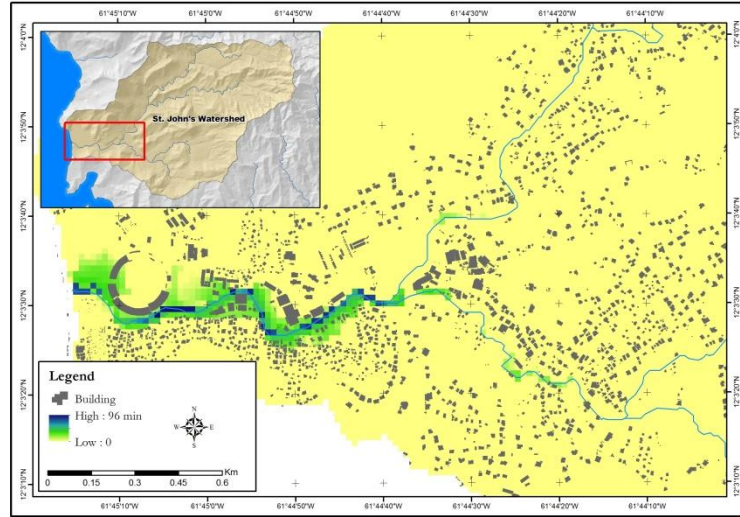


Figure 5-22 Flood duration time in St. John's watershed at 35 years return period*

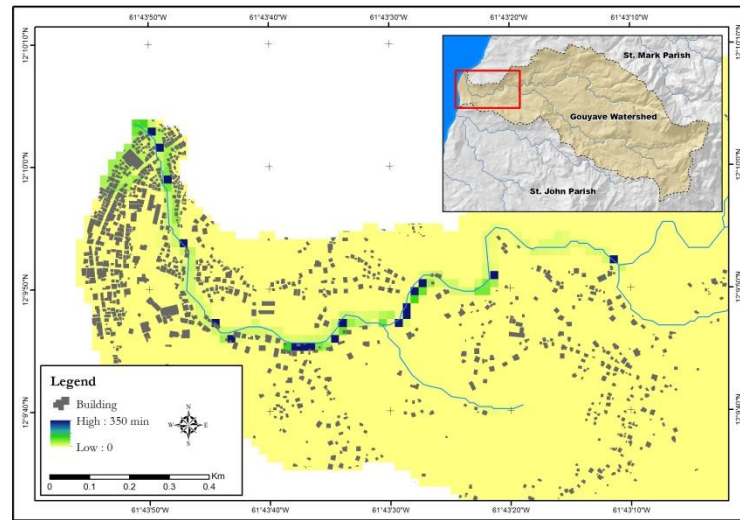


Figure 5-23 Flood duration time in Gouyave watershed at 100 years of return period*

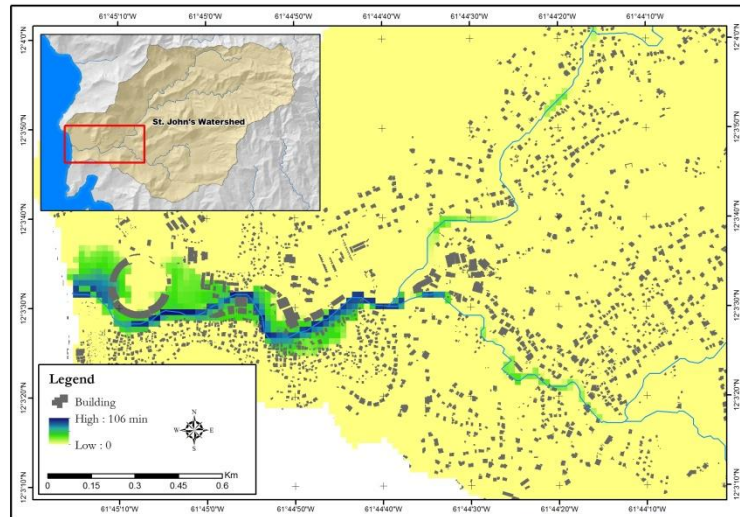


Figure 5-24 duration time in St. John's watershed at 100 years return period*

* Notes: the areas that show on the flood durations and flood propagation time are different with the areas show in flood depth because the model is error.

5.5. Analysis of watershed responses to flood in different return period

It is necessary to analyze how sensitive both watersheds to response flooding. In the previous analysis, it does not explain the sensitivity level of watershed for different return period. There were 5 scenarios of return periods selected, such as 2, 5, 10, 35, and 100 years return period. However, both of watershed areas are safe from flood events in 2 years return periods. In the 2 years return period, Gouyave channels can store 20,791.63 m³ of total run-off in Gouyave watershed and 86,591.38 m³ for St. John's watershed.

Table 5-7 Classification of flood, flood extents and flood volume in 35 years return period

Characteristics	Gouyave watershed					St. John's watershed				
	2 years	5 years	10 years	35 years	100 years	2 years	5 years	10 years	35 years	100 years
Peak discharge (m ³ /s)	3.89	39.14	65.55	110.99	150.59	26.40	78.95	102.80	119.77	134.82
Total discharge (m ³)	20791.63	105173.52	188707.33	387064.16	579248.98	86591.38	256625.48	323887.87	458750.14	636098.37
Flood depth max (m)	0.00	0.00	0.21	1.74	2.25	0.00	2.75	2.95	3.35	3.40
Flood volume (m ³)	0.00	0.00	82.93	12805.56	42803.23	0.00	43128.17	69357.11	109846.42	142377.00
Flood area (m ²)	0.00	0.00	400.00	41600.00	94400.00	0.00	62000.00	98000.00	146000.00	186000.00

Table 5-7 show that St. John's watershed has higher of sensitivity level to flood than in Gouyave watershed. St. John's watershed is responded to flood when 5 years return period with flood depth 2.75 meter, but there is not flood events in Gouyave watershed in this years. Gouyave watershed response flood in 10 years return period with maximum flood depth 0.21 m, while St. John's watershed has response flood in 2.95 m of flood depth in the 10 years return period. The differences in the rates of flood response in two watersheds area are caused by the different characteristics of St. John's watershed and Gouyave watershed. St. John's watershed is more urbanized than Gouyave watershed. Besides that, St. John's watershed is dominated with clay soil types. It is also influenced to the decreasing of infiltration rate which can be increased the run-off.

6. FLOOD SCENARIOS

Flood scenario is developed based on the differences of return period. The model simulations were carried out for three case scenarios with 2 years return period, 35 years return period, and 100 year return period. The results of flood scenarios were analyzed to know the difference of exposure buildings and land-use types in Gouyave watershed and St. John's watershed based on flood depth. In this research, flood depths are classified according to the assumption of flood height based on the human body measurements. This classification is divided flood depth into 5 criteria,

- Areas with flood depth 0.0 m until 0.2 m;
- Areas with flood depth 0.2 m until 0.5 m;
- Areas with flood depth 0.5 m until 1.0 m;
- Areas with flood depth 1.0 m until 1.5 m;
- Areas with flood depth > 1.5 m.

6.1. The building exposed by flood

6.1.1. 2 years return period

There is no flood event for this return period. Determination of return period was assumed by the rainfall data. The 2 years return period flood was chosen to check whether there would be a flood event for this return period. The result of modelling shows that there is no flood in the St. John's and Gouyave watershed. It is matched with the observation during the fieldwork.

6.1.2. 35 years return period

Related with exposure buildings caused by flood, the numbers of building which were affected to flood in St. John's watershed is 216 units. The highest number of building that can be affected to flood is occurred when 0.2 m until 0.5 m of flood depth. In the Gouyave watershed that flood affected number of houses or building totals up to 61 units. The comparison between the numbers of exposure buildings in St. John's watershed and Gouyave watershed per each flood depth level are shown in **Figure 6-2**.

Table 6-1 The number of buildings exposed by flood in 35 years return period

Class	Flood depth (m)	Building (unit)	
		Gouyave watershed	St. John's watershed
Very low	0.1 - 0.2	42	65
Low	0.2 - 0.5	10	78
Moderate	0.5 - 1.0	7	55
High	1.0 - 1.5	1	8
Very high	> 1.5	1	10

The comparison of buildings numbers that are exposed by flood in St. John's watershed and Gouyave watershed for 35 years return period can be shown at **Figure 6-1**. In the two watersheds area, the highest exposure buildings by flood occur when the flood depth reach 0.2 m until 0.5 m. If the flood depth is only

1.0 m until 1.5 m, the numbers of affected building by flood is become lowest. The building locations that inundated by flood can be seen at **Figure 6-2** and **Figure 6-3**.

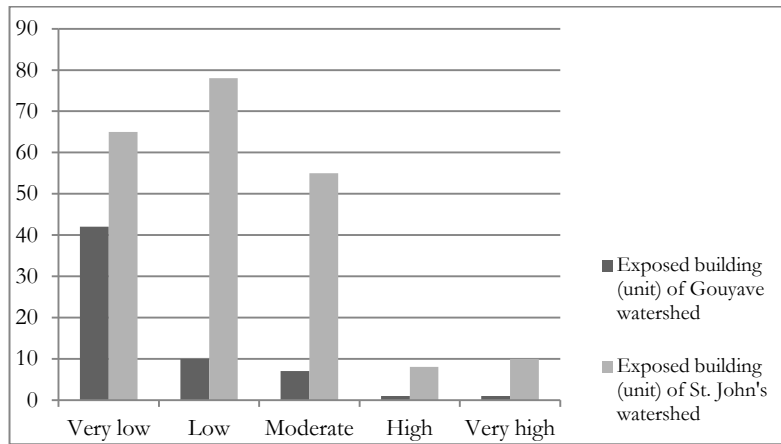


Figure 6-1 The exposure buildings of Gouyave watershed and St. John's watershed per each flood depth level in 35 years return period

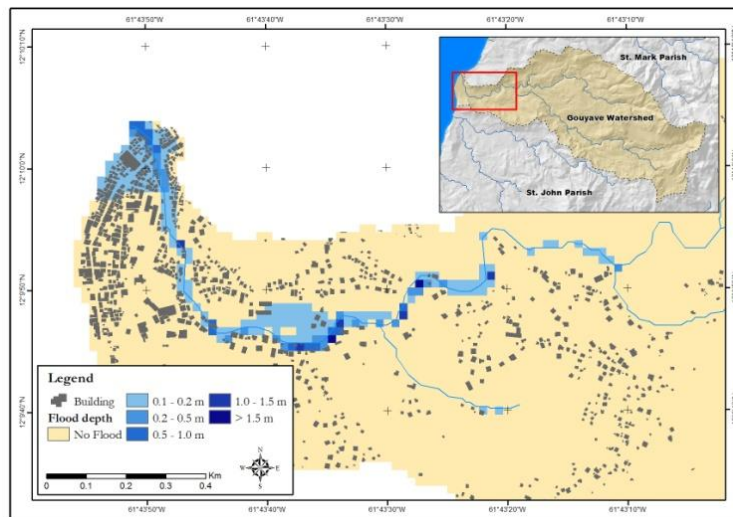


Figure 6-2 Flood depth in Gouyave watershed in 35 years return period

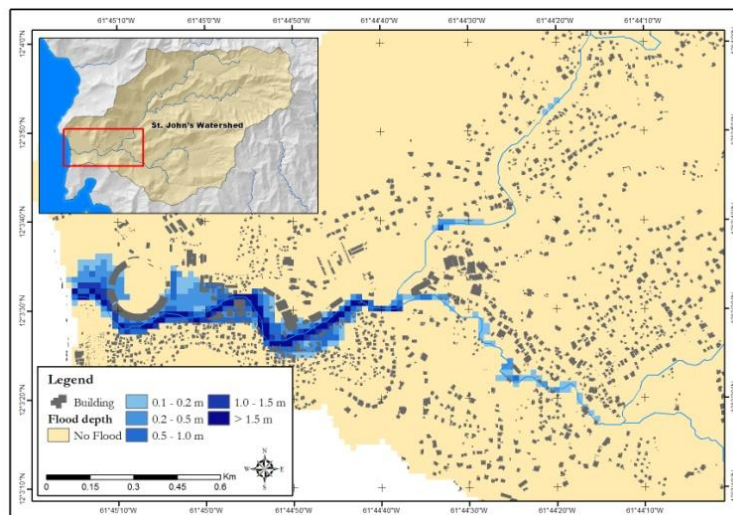


Figure 6-3 Flood depth in St. John's watershed in 35 years return period

6.1.3. 100 years return period

The 100 years return period is the extreme daily rainfall that used in flood modelling at both watersheds. Total comparison in exposed buildings affected by flood in two watersheds seems that the numbers of exposed building in St. John's watershed is higher than Gouyave watershed. The comparison between numbers of buildings exposed in St. John's watershed and Gouyave watershed per each flood depth are shown in **Figure 6-4**.

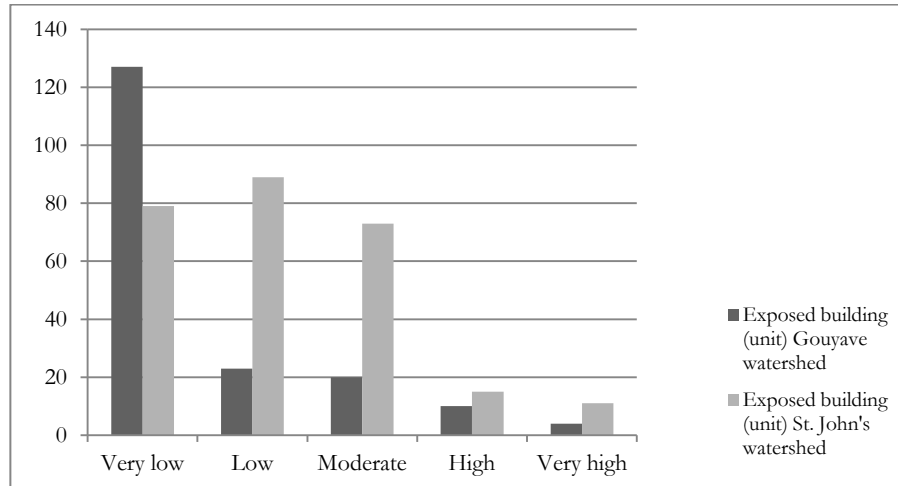


Figure 6-4 The exposure buildings of Gouyave watershed and St. John's watershed per each flood depth level in 100 years return period

Related with the numbers of buildings exposed by flood, the numbers of building which can be affected to flood in St. John's watershed is 267 units. The highest number of building that can be affected by flood in low flood level is 89 units with the flood depth 0.2-0.5 meter. In the very-high flood level, total of buildings exposed by flooding is only 11 units. In addition, the total number of Gouyave's buildings that are potential inundated by flood is 184 units. The highest numbers of building that are exposed by flood is 127 units.

Table 6-2 The number of buildings exposed by flood in 100 years return period

Class	Flood depth (m)	Building (unit)	
		Gouyave watershed	St. John's watershed
Very low	0.1 - 0.2	127	79
Low	0.2 - 0.5	23	89
Moderate	0.5 - 1.0	20	73
High	1.0 - 1.5	10	15
Very high	> 1.5	4	11

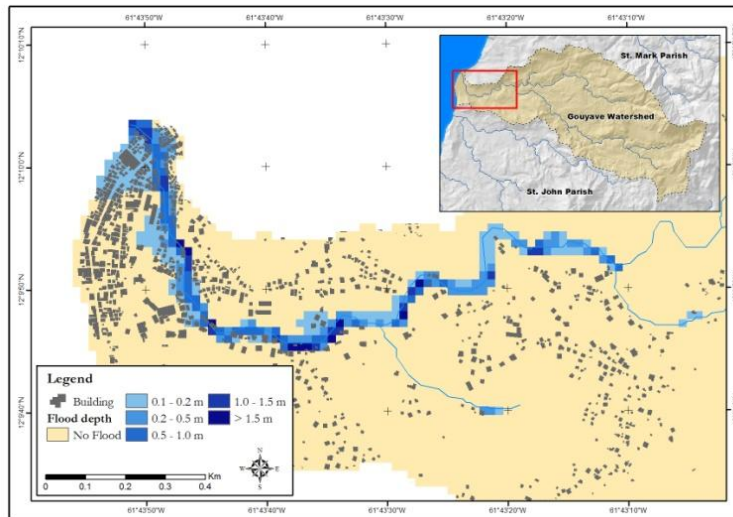


Figure 6-5 Flood depth in Gouyave watershed in 100 years return period

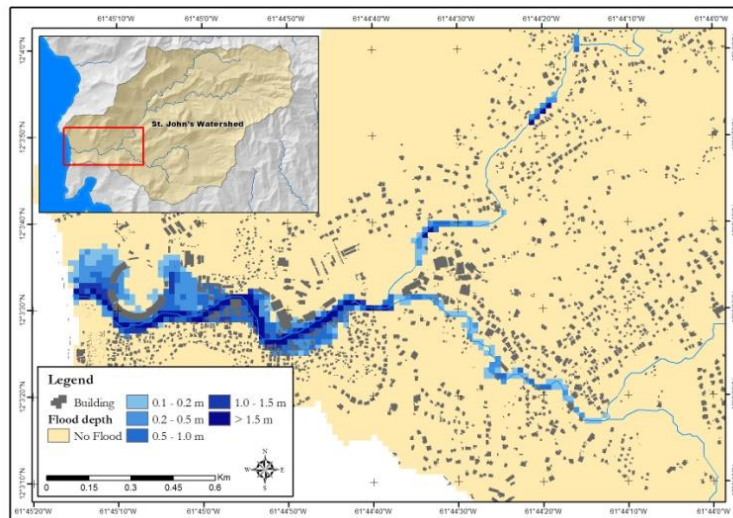


Figure 6-6 Flood depth in St. John's watershed in 100 years return period

6.2. The land-use exposed by flood

6.2.1. 2 years return period

There is no flood event for this return period. Determination of return period was assumed by the rainfall data. The result of modelling shows that there is no flood in the St. John's and Gouyave watershed. It is matched with the observation during the fieldwork.

6.2.2. 35 years return period

Based on **Table 6-8**, the built-up area is the largest area that are exposed by flood in Gouyave watershed. The total built-up area that affected by flood is 30377.27 m². These areas are concentrated in the lower-parts of Gouyave watershed which are dominated with housing and infrastructures (see **Figure 6-2**). Moreover, bare land is the lowest affected area of flooding. Total areas that are affected by flood are only 447.89 m² or 0.72% from total area of affected land-use by flood.

Table 6-3 The land-use types exposed by flood in Gouyave watershed (35 years return period)

Land use	Extent (m ²)					Total
	0.1 - 0.2 m	0.2 - 0.5 m	0.5 - 1.0 m	1.0 - 1.5 m	> 1.5 m	
Bare Land	337.68	110.22	-	-	-	447.89
Built-up Area	26970.36	2321.37	961.87	33.85	89.81	30377.27
Mix Tree	18824.33	3382.27	2191.22	1271.88	617.20	26286.88
Shrub	4374.66	-	-	-	-	4374.66

Similar with Gouyave watershed, built-up areas is the highest land-use types that are exposed by flood in St. John's watershed. Total 68534.44 m² or 50,16% of the total area affected by flood. It is caused by the infiltration rates of soil in built-up area is low. There is not enough natural vegetation surrounding the built-up areas. The 22,61% of shrub also potentially exposed by flood in 35 years of return period. Overall, the total areas that are affected to flood in St. John's watershed is higher than Gouyave watershed.

Table 6-4 The land-use types exposed by flood in St. John's watershed (35 years return period)

Land use	Extent (m ²)					Total
	0.1 - 0.2 m	0.2 - 0.5 m	0.5 - 1.0 m	1.0 - 1.5 m	> 1.5 m	
Bare Land	2472.91	3488.64	653.89	4.83	-	6620.28
Built-up area	17882.58	22899.74	18879.45	5004.91	3867.76	68534.44
Grass Land	7344.20	8467.46	3181.52	1985.25	397.75	21376.19
Mix Tree	5398.06	1765.30	1799.61	202.48	18.27	9183.72
Shrub	1097.27	4789.68	8324.43	4985.48	11695.89	30892.75

6.2.3. 100 years return period

If flood occurs in 0.1 meter until > 1.5 meter in depth, most of area in Gouyave watershed is influenced (Table 6-5). The built-up area is the most influenced land-use by flood. Total area of built-up area that affected by flood is 40543.62 m². The built-up area are inundated by flood is 50.29% from total area that are exposed by flood in Gouyave watershed. In addition, a total mixed-tree area which is inundated by flooding is 38747.57 m². If the built-up area and un-built-up area is compared, total area of developed (built-up) area is higher with proportion 50.29% and 49.70%. Detail information about the numbers of buildings exposed in Gouyave watershed can be seen at Table 6-6.

Table 6-5 The land-use types exposed by flood in Gouyave watershed (100 years return period)

Land use	Extent (m ²)					Total
	0.1 - 0.2 m	0.2 - 0.5 m	0.5 - 1.0 m	1.0 - 1.5 m	> 1.5 m	
Bare Land	98.96	7.28	352.24	66.51	-	524.99
Built-up Area	27637.84	6075.60	5364.61	1214.46	251.11	40543.62
Grass Land	328.09	-	-	-	-	328.09
Mix Tree	14576.35	11353.64	7162.13	3062.77	2592.67	38747.57
Shrub	449.74	12.40	11.76	-	-	473.90

Similar with Gouyave watershed, the most influence land-use by flood is built-up area. Generally, built-up areas have low infiltration rates due to there are not enough catchment area that can be supported to infiltrate the water. The total extent of built-up area that is affected is 83,291.48 m². It is much dominated land-use as affected by flood. Besides the built-up area, shrub and grass land also high affected to flood. It is different with forest; total area of forest inundated by flood is only 0.33 m² because forest contains much natural vegetation which has high infiltration rates (see **section 4.2.1**).

Table 6-6 The land-use types exposed by flood in St. John's watershed (100 years return period)

Land use	Extent (m ²)					Total
	0.1 - 0.2 m	0.2 - 0.5 m	0.5 - 1.0 m	1.0 - 1.5 m	> 1.5 m	
Bare Land	2419.63	5150.19	1319.66	132.80	-	9022.29
Builtup area	22706.20	22663.65	25395.41	8026.86	4499.36	83291.48
Forest	-	0.33	-	-	-	0.33
Grass Land	9737.92	13280.78	4196.19	3589.26	418.10	31222.24
Mix Tree	5884.42	5106.73	3269.71	660.52	1143.81	16065.19
Shrub	1939.11	4250.69	7499.19	5852.84	13682.70	33224.54

Comparison between the exposed land-use types in Gouyave watershed and St. John's watershed can be shown at this following figure. **Figure 6-7** shows that the most influence land-use in those watersheds in is built-up areas, specifically when flood occurred in 0.1 to 1 meter. It can show from the height of built-up areas in this graphic. The lowest total areas that are exposed by flood are forest and bare land.

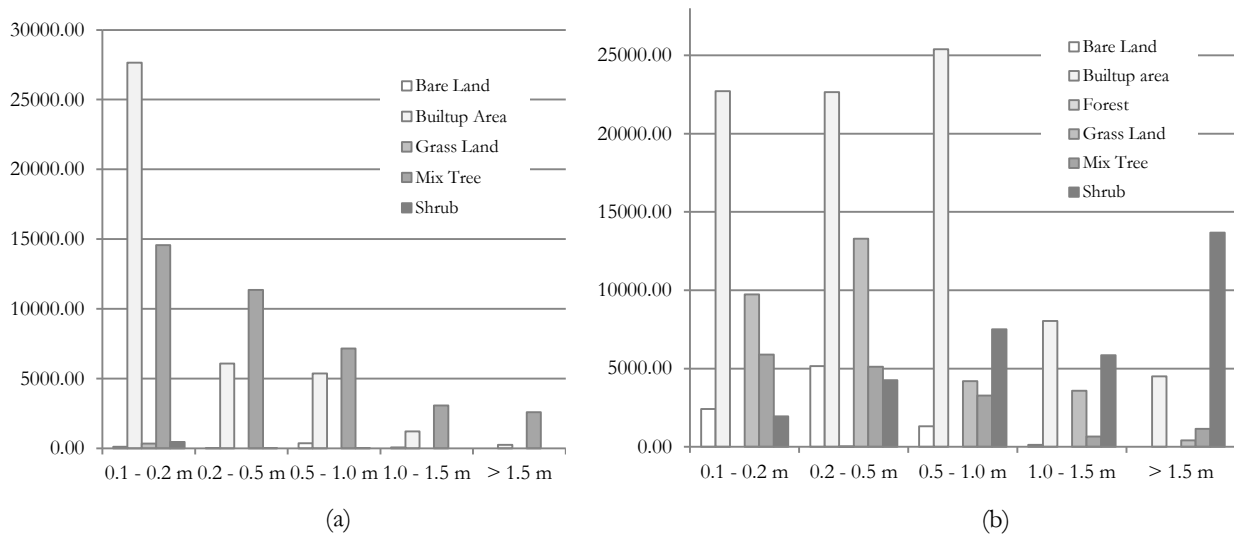


Figure 6-7 The comparison of land-use types exposed by flood in Gouyave watershed (a) and St. John's watershed (b)

7. CONCLUSIONS AND RECOMMENDATIONS

7.1. Conclusions

The main objective of this research is to compare the response of flash flood behaviours in Gouyave watershed and St. John's watershed, Grenada. This main objective was sub-divided into some objectives; identification of the physical characteristics (land-use and soil) for flash-floods modelling in Gouyave watershed and St. John's watershed, determination of the frequency and magnitude of rainfall based on recorded daily totals and design series of return periods, assessment of sensitivity parameters on the LISEM and flood model, comparison the flood characteristics for different return periods, and assessment of exposure buildings and land-use based on different return periods. Based on the findings of this research, it is possible to conclude the following:

- Land use characteristics in Gouyave watershed and St. John's watershed are dominated by land-use type "mixed-tree". More than 50% of Gouyave watershed area and St. John's watershed area are covered by this land-use type. The built-up area in Gouyave watershed is 5.53% which makes the Gouyave watershed typical rural area. The built-up area in the St. John's watershed is 23.28% and gives it a much more urbanized character.
- Each land-use types have a different characteristic related with the soil physical properties, especially Ksat and porosity. The natural land-use types, such as forest and mixed-trees and cultivated land, like agriculture lands have high values of Ksat, but low value of porosity. It seems that they have higher infiltration rates than other land-use types.
- Related with soil properties, the Ksat and porosity values based on land use types are better be related than Ksat and porosity values based on soil types. They are more variance and they can represent the top-soil conditions. In order to get the best accuracy and appropriate values for flood model, it can ignore the outlier values from them.
- The maximum daily rainfall for each return periods are **75,64 mm** (2 years return period); **110.20 mm** (5 years return period); **133.08 mm** (10 years return periods), **172.42 mm** (35 years return period), and **204.72 mm** (100 years return period). Because of the limited data of rainfall, this research used the 24-hour rain synthetic rainfall distributions intensity method from Natural Resources Conservation Service/Soil conservation service (NRCS/SCS), USA.
- From 5 types return periods (2,5,10,35, and 100 years return periods), the 35 years return period is the most representative rainfall, like 2011 condition. So, the 35 years return period used as basic reference to conduct flood model.
- There are 3 parameters which are influenced to flood model, such as Ksat, initial soil moisture and surface roughness (mannings's n). Then, the most sensitive parameters to flood model are Ksat and initial soil moisture. It is due to the Ksat and initial soil moisture give the significant impact values to the flood characteristics.
- Model calibration and validation was analyzed using Bias method and RMSE method. The result shows that flood model has good performance (Bias and RMSE values are close to zero). This model represent the existing conditions of flood event in 2011 at Gouyave watershed and St.

John's watershed. It is also strengthened by the information from their citizens and their governments.

- The characteristics of Gouyave watershed and St. John's watershed are influenced by several flood characters, such as peak discharge and total discharge, total infiltration, flood depth, flood duration, flood propagation, flood volume, and flood area. St. John's watershed is more sensitive and has good response to flood. Flood event occurs in St. John's watershed at 5 years return period, while flood occur in Gouyave watershed at 10 fyears return period.
- The flood characteristics in those two watersheds are influenced by urbanization factor. Beside that, climate situation (specifically rainfall), shape and size of watersheds, and topographic conditions also have influences to the occurrence of flash-floods in two watersheds.
- The built-up areas, shrub, and grass land are potentially affected by flood in 35 years return periods and 100 years return periods in two watersheds areas. Because St. John's watershed is more urbanized, the total number of buildings exposed by flood in St. John's watershed (483 units) is higher than Gouyave watershed (254 units), specifically when flood depth reaches 0.2 meter until 0.5 meter.

7.2. Limitations of research

- Researcher did not obtain the detail rainfall data. Thus, this research only used the rainfall intensity method from Natural Resources Conservation Service/Soil Conservation Service (NRCS/SCS), United States of America.
- Digital Elevation Model (DEM) which was used in this research has resolution 5 meters, but in the downstream areas of research area (Gouyave watershed and St. John's watershed), DEM a little bit coarse.
- The Leaf Area Index (LAI) values were generated from literature. It was not accessible using the data from fieldwork that are generated by NDVI because of technical reason to collect the LAI data. Whereas, the LAI value generated using NDVI are better.
- This research did not conduct discharge measurements during fieldwork to calibrate, so the calibration model only used flood depth points measurement with limited numbers.

7.3. Recommendations

Based on the conclusions and limitations of research, this research recommends the following:

- Grenada's government is necessary for measuring the detail rainfall data per 30 minutes in order to conduct the best result of flood model.
- It is required to develop the similar researches which are emphasized in the assessment of economic loses, specifically in the St. John's watershed where the majority of flood-prone areas are locations of public facilities, office buildings, stadium, and housing areas, which have high economic values.

LIST OF REFERENCES

- Alkema, D. (2007). *Simulationg floods: on the application of a 2D-hydraulic model for flood hazard and risk assessment*. Enschede: University of Twente Faculty of Geo-Information and Earth Observation (ITC).
- APFM. (2007a). *Guidance of flash flood management: recent experiences from central and eastern europe*. (WMO, Ed.).
- APFM. (2007b). *The role of land-use planning in flood management: a tool for integrated flood management*.
- Bueno, R. Herzfeld, C. Stanton, E. A. & Ackerman, F. (2008). *The Carribean and climate change - The cost of inaction*.
- Carby, B. (2011). *Carribean implementation of the hyogo framework for action (HFA) mid-term review*. http://www.preventionweb.net/files/18197_203carby.carribeanimplementationoft.pdf.
- Carrasco, A. Ferreira, O. Matias, A. & Freire, P. (2012). *Flood hazard assessment and management of fetch-limited coastal environments*. *Ocean & Coastal Management*, 65, 15-25. doi: 10.1016/j.ocecoaman.2012.04.016.
- CCA. (1991). *Grenada environmental profile*. St. Michael, Barbados.
- CDERA. (2003). *Status of hazard maps vulnerability assessments and digital maps: Grenada country report*.
- CEHI. (2006). *Geographical Information System-Assisted water availability analysis for Grenada*. St. Lucia: UNEP.
- Chow, V.T. Maidment, D.R. & Mays, L.(1988). *Applied Hydrology*. McGraw-Hill, 572p.
- Connel, R.J. Painter D.J. & Beffa, C. (2001). Two-dimensional flood plan flow: Model Validation. *Journal of Hydrologic Engineering*, 406-415.
- Cooper, V. & Opadeyi, J. (2006). *Flood hazard mapping of Grenada*. St. George.
- Creutin, J.D. & Borga. (2003). Radar hydrology modifies the monitoring of flash flood hazard. *Hydrol. Processes* 17 (7), 1453-1456.
- CSIRO. (2000). *Annual Report*. Campbell: CSIRO.
- De Jong, S. & Jetten, V.G. (2007) Estimating spatial patterns of rainfall interception from remotely sensed vegetation indices and spectral mixture analysis. *International journal of geographical information science* : IJGIS, 21, 5, 529-545.
- De Roo, A.P.J. & Jetten, V. (1999). Calibrating and validatin the LISEM model for two datasets from the Netherlands and South Africa. *Catena, Elsevier*, 477-493.
- Delestre, O. Cordier, S. James, F. & Darboux, F. (2008). Simulation of Rain-Water Overland-Flow. *Proceedings of Symposia in Applied Mathematics* 67, 537-546.
- Dhar, O.N. & Nandargi, S. (2003). *Hydrometeorological aspects of floods in India*. Dordrecht: Kluwer Academic Publishers.
- Diakakis, M. Andreadakis, E. & Fountoulis, I. (2011). Flash flood events of Potamoula, Greece (Hydrology, geomorphic effects, and damage characteristics). *9th International Conference of Hydrogeology, Commission of Hydrology of the Geological Society of Greece*, 163-170. Athena: Springer.
- Ezemoye, M.N. & Emeribe, C.N. (2011). Flood characteristics and management adaptations in parts of the Imo River system. *Ethiopian Journal of Environmental Studies and Management*, 4(3), 56-64. <http://www.ajol.info/index.php/ejesm/article/viewFile/71635/60598>
- GFDRR. (2010). *Disaster Risk Management in Latin America and the Carribean Region: Grenada*. Washington, DC.
- Hunter, N.M. Bates, P.D. Horrit, M. De Roo, A. & Werner, M. (2005). Utility of different data types for calibrating flood inundation models within a GLUE framework. *Hydrology and Earth System Sciences*, 9(4), 412-430.
- Imamura, F. & To, D. (1997). Flood and typhoon disasters in Vietnam in the half century since 1950. *Natural Hazards*, 15, 71-87.

- Islam, R.S. (2012). *Small-scale dam break flood scenario studies for risk reduction in Jian river, Sichuan, China*. Enschede: University of Twente Faculty of Geo-Information and Earth Observation (ITC).
- Jetten V. & De Roo, A. (2001). *Spatial analysis of erosion conservation measures with LISEM*. In *Landscape Erosion and Evolution Modelling*, Harmon RS, Doe WW (eds), 429–445. Kluwer Academic: New York
- Juan, L & Yong, C. (2014). Natural weather-induced hazards: floods, storms, fires, and drought. *Natural and human induced hazards and environmental waste management*.
- Kamphorst, E. Jetten, V.G. Guerif, J. Nen, J. Iversen, B.V. Douglas J.T. & Paz, A. (2000). Predicting depressional storage from soil surface roughness. *Soil science society of America journal*, 64, vol 5, 1749-1758.
- Kelsch, M. (2001). *Hydrometeorological characteristics of flash floods: Coping with flash floods-Environmental Security*. Netherlands: Springer Netherlands.
- Liu, X. Zhang, Z. & McDougall, K. (2011). Characteristics analysis of a flash-flood affected creek catchment using LiDAR-derived DEM. *19th International Congress on Modelling and Simulation*, 2409-2415. Perth, Australia.
- Macklin, L.D. Ehret, P. & Neyer, M. (1999). *Waterlines-News affecting the management and use of Indiana's water resources*. Indianapolis, Indiana: Division of Water, Indiana Department of Natural Resources.
- Maddox, R.A., Canova, F. & Hoxit, L.R. (1980). Meteorological characteristics of flash flood events over the Western United States. *Monthly Weather Review*, 108, 1866-1877.
- Mandych, A. (2009). Classification of floods. *Natural Disasters, II*. <http://www.eolss.net/sample-chapters/c01/E4-06-02-05.pdf>
- Masters, K.V. (2009). *1D2D Modelling of sediment transport and deposition from flash floods: A case study in the Nam Chun Watershed, Thailand*. Enschede: University of Twente Faculty of Geo-Information and Earth Observation (ITC).
- Mecometer. (2014). *Average yearly precipitation-by country*. Retrieved August 27,2014, from <http://mecometer.com/topic/average-yearly-precipitation/>.
- Mhonda, A. (2013). *Evaluating flash flood risk reduction strategies in built-up environment in Kampala*. Enschede: University of Twente Faculty of Geo-Information and Earth Observation (ITC).
- Nicholls, R.J. & Wong, P. (2007). *Coastal system and low-lying areas, IPCC 2007: Impacts, Adaptation, and Vulnerability-IPCC Fourth Assessment Report (AR4)*. Cambridge, UK: Cambridge University Press.
- Niles, E. (2010). *Grenada disaster vulnerability reduction project: Environmental impacts assessment*.
- Nimmo, J. (2004). Porosity and Pore Size Distribution. *Encyclopedia of Soils in the Environment*, 295-303.
- NOAA. (2010). *Flash flood early warning system reference guide*. MD, USA
- Pedzisai, E. (2010). *Rainfall-runoff modelling for flash floods in Coung Think Catchment: Yen Bai Province: Vietnam*. Enschede: University of Twente Faculty of Geo-Information and Earth Observation (ITC). http://www.itc.nl/library/papers_2010/msc/aes/pedzisai.pdf
- Prachansri, S. (2007). *Analysis of soil and land cover parameters for flood hazard assessment: a case study of the Nam Chun Watershed, Phetchabun, Thailand*. Enschede: University of Twente Faculty of Geo-Information and Earth Observation (ITC).
- Rusjan, S. Kobold, M. & Mikos, M. (2009). Characteristics of the extreme rainfall event and consequent flash floods in W Slovenia in September 2007. *Natural Hazards and Earth System Sciences*, 947-956.
- Rustanto, A. (2010). *Soil erosion dynamics due to land use/land cover changes, case study in Upper Serayu Watershed, Indonesia*. Enschede: University of Twente Faculty of Geo-Information and Earth Observation (ITC).
- Saber, M. Hamaguchi, T. Kojiri, T. & Tanaka, K. (2010). *Flash flooding simulation using hydrological modeling of Wadi Basins at Nile River based on Satellite Remote Sensing Data*. Kyoto: Graduate School of Engineering, Kyoto University.

- Santangelo, N. Sanro, A. Crecenzo, G.D. Foscari, G. Liuzza, V. Sciarrotta, S. & Scorpio, V. (2011). *Flood susceptibility assessment in a highly urbanized alluvial fan: the case study of Sala Consilina (southern Italy)*. Napoly, Italy: Natural Hazards and Earth System Sciences.
- Setiawan, A. (2010). *Study of land-use change effect on the runoff using LISEM Rainfall Model*. Enschede: University of Twente Faculty of Geo-Information and Earth Observation (ITC).
- Stewart, S. (2005). Tropical cyclone report Hurricane Ivan 2-24 September 2004. 3.
- Westen, C.J. Alkema, D. Damen, M. Kerle, N. & Kingma, N. (2011). *Multi-hazard risk assessment*. Enschede, the Netherlands: United Nations University - ITC School on Disaster Geo-informations Management.
- Wigati, M. (2008). *Improving flood hazard and vulnerability assessment based on social assessment in Bogowonto river*. Yogyakarta Enschede: ITC Gadjah Mada University (UGM), Yogyakarta Enschede: Enschede: University of Twente Faculty of Geo-Information and Earth Observation (ITC).
- Xiao, J. & Moody, A. (2005). A comparison of methods for estimating fractional green vegetation cover within a desert to upland transition zone in central New Mexico, USA. *Remote Sensing of Environment*, 237-250.

APPENDICES

Appendix 1

Point reference for land use accuracy assessment in Gouyave watershed

Coordinate				Land use/land cover
UTM X	UTM Y	Latitude	Longitude	
641557.785	1343442.401	12° 8' 58.817" N	61° 41' 56.415" W	Agriculture
640639.523	1344096.140	12° 9' 20.237" N	61° 42' 26.688" W	Agriculture
640548.940	1344104.798	12° 9' 20.533" N	61° 42' 29.683" W	Agriculture
641119.857	1344386.172	12° 9' 29.603" N	61° 42' 10.752" W	Agriculture
641428.000	1344340.000	12° 9' 28.052" N	61° 42' 0.566" W	Agriculture
640459.779	1345645.964	12° 10' 10.708" N	61° 42' 32.391" W	Agriculture
640124.440	1344640.186	12° 9' 38.024" N	61° 42' 43.642" W	Agriculture
641034.000	1345640.000	12° 10' 10.425" N	61° 42' 13.395" W	Bare Land
642553.194	1343182.425	12° 8' 50.201" N	61° 41' 23.528" W	Bare Land
638118.107	1344761.872	12° 9' 42.292" N	61° 43' 49.996" W	Bare Land
638095.672	1345410.075	12° 10' 3.393" N	61° 43' 50.638" W	Built Up
638744.000	1344777.000	12° 9' 42.689" N	61° 43' 29.288" W	Built Up
638612.000	1344679.000	12° 9' 39.519" N	61° 43' 33.670" W	Built Up
638880.827	1344738.498	12° 9' 41.415" N	61° 43' 24.768" W	Built Up
642518.693	1343099.848	12° 8' 47.518" N	61° 41' 24.682" W	Forest
641929.033	1343147.942	12° 8' 49.176" N	61° 41' 44.180" W	Forest
641598.941	1343358.621	12° 8' 56.084" N	61° 41' 55.066" W	Forest
642105.037	1343483.901	12° 9' 0.083" N	61° 41' 38.305" W	Forest
640810.088	1343892.404	12° 9' 13.580" N	61° 42' 21.078" W	Forest
641782.033	1344640.654	12° 9' 37.782" N	61° 41' 48.807" W	Forest
641716.990	1344695.266	12° 9' 39.570" N	61° 41' 50.950" W	Forest
641656.090	1344706.394	12° 9' 39.942" N	61° 41' 52.962" W	Forest
640241.501	1345454.005	12° 10' 4.494" N	61° 42' 39.642" W	Forest
640361.733	1345491.113	12° 10' 5.683" N	61° 42' 35.659" W	Forest
639112.576	1344918.212	12° 9' 47.229" N	61° 43' 17.073" W	Grass Land
639819.262	1345028.0483	12° 9' 50.695" N	61° 42' 53.677" W	Grass Land
641830.406	1344151.411	12° 9' 21.851" N	61° 41' 47.284" W	Grass Land
642628.027	1343238.811	12° 8' 52.024" N	61° 41' 21.043" W	Mix Tree
641366.871	1343487.611	12° 9' 0.319" N	61° 42' 2.723" W	Mix Tree
640929.309	1343746.840	12° 9' 8.824" N	61° 42' 17.157" W	Mix Tree
640529.239	1344269.934	12° 9' 25.911" N	61° 42' 30.309" W	Mix Tree
641373.703	1344366.276	12° 9' 28.916" N	61° 42' 2.358" W	Mix Tree
640090.638	1344409.321	12° 9' 30.515" N	61° 42' 44.797" W	Mix Tree
640407.602	1344504.951	12° 9' 33.579" N	61° 42' 34.296" W	Mix Tree
641685.998	1344599.438	12° 9' 36.456" N	61° 41' 51.990" W	Mix Tree
640289.577	1344701.385	12° 9' 39.991" N	61° 42' 38.170" W	Mix Tree
639830.932	1344733.404	12° 9' 41.103" N	61° 42' 53.337" W	Mix Tree
638858.172	1344798.859	12° 9' 43.383" N	61° 43' 25.508" W	Mix Tree

Coordinate				Land use/land cover
UTM X	UTM Y	Latitude	Longitude	
641485.460	1344822.359	12° 9' 43.743" N	61° 41' 58.589" W	Mix Tree
639965.312	1344846.015	12° 9' 44.748" N	61° 42' 48.874" W	Mix Tree
641436.150	1344856.232	12° 9' 44.853" N	61° 42' 0.215" W	Mix Tree
641277.651	1344859.626	12° 9' 44.988" N	61° 42' 5.458" W	Mix Tree
640487.559	1344892.622	12° 9' 46.184" N	61° 42' 31.590" W	Mix Tree
638383.092	1344900.787	12° 9' 46.773" N	61° 43' 41.209" W	Mix Tree
638244.858	1344946.651	12° 9' 48.287" N	61° 43' 45.775" W	Mix Tree
639754.244	1345024.039	12° 9' 50.575" N	61° 42' 55.829" W	Mix Tree
639308.573	1345028.053	12° 9' 50.774" N	61° 43' 10.572" W	Mix Tree
640083.402	1345052.672	12° 9' 51.456" N	61° 42' 44.935" W	Mix Tree
639924.848	1345118.304	12° 9' 53.617" N	61° 42' 50.170" W	Mix Tree
638645.573	1345139.242	12° 9' 54.494" N	61° 43' 32.488" W	Mix Tree
640122.101	1345313.889	12° 9' 59.952" N	61° 42' 43.614" W	Mix Tree
641094.787	1345181.283	12° 9' 55.485" N	61° 42' 11.456" W	Mix Tree
640960.590	1345002.069	12° 9' 49.673" N	61° 42' 15.924" W	Shrub
641982.844	1343890.135	12° 9' 13.324" N	61° 41' 42.283" W	Shrub
641799.554	1344043.221	12° 9' 18.335" N	61° 41' 48.322" W	Shrub

Appendix 2

Point reference for land use accuracy assessment in St. John watershed

Coordinate				Land use/land cover
UTM X	UTM Y	Latitude	Longitude	
637043.748	1334081.450	12° 3' 54.828" N	61° 44' 27.168" W	Bare Land
636603.864	1333911.025	12° 3' 49.347" N	61° 44' 41.741" W	Bare Land
637744.728	1334000.687	12° 3' 52.094" N	61° 44' 3.999" W	Bare Land
638234.206	1333991.575	12° 3' 51.724" N	61° 43' 47.813" W	Bare Land
636332.525	1333209.941	12° 3' 26.568" N	61° 44' 50.820" W	Built Up
638645.000	1333460.000	12° 3' 34.360" N	61° 43' 34.310" W	Built Up
636296.000	1333573.000	12° 3' 38.390" N	61° 44' 51.973" W	Built Up
637178.000	1334007.000	12° 3' 52.385" N	61° 44' 22.740" W	Built Up
637493.000	1334761.000	12° 4' 16.879" N	61° 44' 12.208" W	Built Up
635634.000	1333625.000	12° 3' 40.181" N	61° 45' 13.857" W	Built Up
637507.797	1332325.173	12° 2' 57.595" N	61° 44' 12.089" W	Built Up
636944.484	1332910.005	12° 3' 16.714" N	61° 44' 30.628" W	Built Up
637449.777	1333251.638	12° 3' 27.758" N	61° 44' 13.867" W	Built Up
636518.673	1333028.717	12° 3' 20.642" N	61° 44' 44.692" W	Forest
639243.775	1333193.165	12° 3' 25.585" N	61° 43' 14.550" W	Forest
639314.199	1333246.473	12° 3' 27.309" N	61° 43' 12.213" W	Forest
639248.927	1333330.599	12° 3' 30.057" N	61° 43' 14.358" W	Forest
639281.733	1333546.730	12° 3' 37.087" N	61° 43' 13.240" W	Forest
637869.002	1333628.083	12° 3' 39.948" N	61° 43' 59.946" W	Forest
637404.864	1334417.657	12° 4' 5.717" N	61° 44' 15.175" W	Forest
640071.209	1335139.671	12° 4' 28.813" N	61° 42' 46.885" W	Forest
639932.480	1335608.705	12° 4' 44.100" N	61° 42' 51.400" W	Forest
640022.999	1335623.817	12° 4' 44.578" N	61° 42' 48.405" W	Forest
636014.159	1333356.884	12° 3' 31.398" N	61° 45' 1.326" W	Grass Land
638604.000	1335388.000	12° 4' 37.119" N	61° 43' 35.369" W	Grass Land
637818.998	1333272.990	12° 3' 28.398" N	61° 44' 1.654" W	Grass Land
635853.370	1333551.724	12° 3' 37.764" N	61° 45' 6.614" W	Grass Land
635670.889	1333379.695	12° 3' 32.191" N	61° 45' 12.674" W	Grass Land
638273.970	1332353.934	12° 2' 58.416" N	61° 43' 46.749" W	Mix Tree
637739.456	1332645.251	12° 3' 7.978" N	61° 44' 4.380" W	Mix Tree
637723.388	1332667.169	12° 3' 8.694" N	61° 44' 4.908" W	Mix Tree
637496.909	1332794.059	12° 3' 12.858" N	61° 44' 12.378" W	Mix Tree
638691.256	1332869.302	12° 3' 15.127" N	61° 43' 32.871" W	Mix Tree
638654.544	1332890.294	12° 3' 15.816" N	61° 43' 34.082" W	Mix Tree
638137.062	1333297.136	12° 3' 29.136" N	61° 43' 51.132" W	Mix Tree
636701.198	1333314.490	12° 3' 29.916" N	61° 44' 38.612" W	Mix Tree
636649.060	1333437.718	12° 3' 33.935" N	61° 44' 40.318" W	Mix Tree
636646.655	1333516.331	12° 3' 36.494" N	61° 44' 40.386" W	Mix Tree
637120.262	1333539.743	12° 3' 37.185" N	61° 44' 24.720" W	Mix Tree
639010.644	1333539.917	12° 3' 36.906" N	61° 43' 22.206" W	Mix Tree

Coordinate				Land use/land cover
UTM X	UTM Y	Latitude	Longitude	
637108.318	1333576.372	12° 3' 38.379" N	61° 44' 25.109" W	Mix Tree
636862.119	1333578.450	12° 3' 38.483" N	61° 44' 33.251" W	Mix Tree
638657.376	1333647.737	12° 3' 40.469" N	61° 43' 33.872" W	Mix Tree
636283.257	1333827.464	12° 3' 46.675" N	61° 44' 52.356" W	Mix Tree
637618.533	1333835.934	12° 3' 46.751" N	61° 44' 8.197" W	Mix Tree
636935.890	1333855.320	12° 3' 47.484" N	61° 44' 30.769" W	Mix Tree
638478.398	1333872.652	12° 3' 47.816" N	61° 43' 39.756" W	Mix Tree
636216.469	1333899.476	12° 3' 49.028" N	61° 44' 54.554" W	Mix Tree
637827.618	1333985.148	12° 3' 51.576" N	61° 44' 1.260" W	Mix Tree
638749.038	1334137.226	12° 3' 56.387" N	61° 43' 30.765" W	Mix Tree
638847.434	1334148.181	12° 3' 56.728" N	61° 43' 27.510" W	Mix Tree
637238.666	1334218.815	12° 3' 59.270" N	61° 44' 20.701" W	Mix Tree
638187.941	1334416.703	12° 4' 5.568" N	61° 43' 49.278" W	Mix Tree
638191.807	1334432.040	12° 4' 6.067" N	61° 43' 49.148" W	Mix Tree
638254.761	1334503.064	12° 4' 8.369" N	61° 43' 47.055" W	Mix Tree
637328.774	1334594.459	12° 4' 11.483" N	61° 44' 17.664" W	Mix Tree
639202.187	1334678.949	12° 4' 13.950" N	61° 43' 15.696" W	Mix Tree
638240.645	1334749.687	12° 4' 16.398" N	61° 43' 47.484" W	Mix Tree
637278.260	1334898.798	12° 4' 21.396" N	61° 44' 19.288" W	Mix Tree
638466.329	1334987.063	12° 4' 24.090" N	61° 43' 39.984" W	Mix Tree
638484.334	1335043.998	12° 4' 25.940" N	61° 43' 39.380" W	Mix Tree
639477.047	1335300.735	12° 4' 34.146" N	61° 43' 6.510" W	Mix Tree
639977.776	1335302.530	12° 4' 34.128" N	61° 42' 49.950" W	Mix Tree
638048.506	1335338.511	12° 4' 35.592" N	61° 43' 53.748" W	Mix Tree
639452.939	1335400.887	12° 4' 37.409" N	61° 43' 7.292" W	Mix Tree
639513.059	1335514.190	12° 4' 41.088" N	61° 43' 5.286" W	Mix Tree
638374.000	1334105.000	12° 3' 55.395" N	61° 43' 43.173" W	Mix Tree
637384.720	1332846.394	12° 3' 14.578" N	61° 44' 16.080" W	Shrub
638333.407	1332985.492	12° 3' 18.963" N	61° 43' 44.687" W	Shrub
637683.183	1333008.976	12° 3' 19.825" N	61° 44' 6.185" W	Shrub
636277.511	1333257.988	12° 3' 28.140" N	61° 44' 52.632" W	Shrub
636013.712	1333295.680	12° 3' 29.406" N	61° 45' 1.350" W	Shrub
636214.869	1333347.845	12° 3' 31.074" N	61° 44' 54.690" W	Shrub
636665.250	1333353.128	12° 3' 31.179" N	61° 44' 39.795" W	Shrub
639998.826	1335224.283	12° 4' 31.578" N	61° 42' 49.266" W	Shrub
639870.000	1335210.000	12° 4' 31.133" N	61° 42' 53.529" W	Shrub
639476.000	1335176.000	12° 4' 30.086" N	61° 43' 6.564" W	Shrub
637641.847	1334398.663	12° 4' 5.063" N	61° 44' 7.340" W	Shrub
638145.748	1333963.531	12° 3' 50.825" N	61° 43' 50.743" W	Shrub
637179.132	1334960.529	12° 4' 23.420" N	61° 44' 22.557" W	Shrub

Appendix 3

Soil physical properties measurement from soil sample collected during fieldwork

Location	Coordinate				Hydraulic Conductivity (mm/hr)	Porosity (%)
	UTM X	UTM Y	Latitude	Longitude		
Gouyave	639112.576	1344918.212	12° 9' 47.229" N	61° 43' 17.073" W	19.29	58.01
	639819.262	1345028.048	12° 9' 50.695" N	61° 42' 53.677" W	27.86	62.51
	641716.991	1344695.266	12° 9' 39.570" N	61° 41' 50.950" W	192.86	67.64
	638645.573	1345139.242	12° 9' 54.494" N	61° 43' 32.488" W	1.07	63.71
	641119.857	1344386.172	12° 9' 29.603" N	61° 42' 10.752" W	10.71	61.36
	641345.760	1344892.210	12° 9' 46.038" N	61° 42' 3.199" W	12.86	57.46
	641277.651	1344859.626	12° 9' 44.988" N	61° 42' 5.458" W	107.14	58.27
	640529.239	1344269.934	12° 9' 25.911" N	61° 42' 30.309" W	107.14	53.80
	640487.559	1344892.622	12° 9' 46.184" N	61° 42' 31.590" W	37.50	51.81
	642628.027	1343238.811	12° 8' 52.024" N	61° 41' 21.043" W	385.71	68.37
	641929.033	1343147.942	12° 8' 49.176" N	61° 41' 44.180" W	300.00	80.87
	641598.941	1343358.621	12° 8' 56.084" N	61° 41' 55.066" W	3.21	69.88
	639308.573	1345028.053	12° 9' 50.774" N	61° 43' 10.572" W	235.71	52.09
	640083.402	1345052.672	12° 9' 51.456" N	61° 42' 44.935" W	51.43	51.85
	639830.932	1344733.404	12° 9' 41.103" N	61° 42' 53.337" W	428.57	54.01
	641557.785	1343442.401	12° 8' 58.817" N	61° 41' 56.415" W	5.36	65.19
	641656.091	1344706.394	12° 9' 39.942" N	61° 41' 52.962" W	257.14	68.74
	638383.092	1344900.787	12° 9' 46.773" N	61° 43' 41.209" W	21.43	46.20
	638858.172	1344798.859	12° 9' 43.383" N	61° 43' 25.508" W	107.14	52.93
	642518.693	1343099.848	12° 8' 47.518" N	61° 41' 24.682" W	321.43	71.26
	640929.309	1343746.840	12° 9' 8.824" N	61° 42' 17.157" W	342.86	60.90
	640548.940	1344104.798	12° 9' 20.533" N	61° 42' 29.683" W	600.00	58.80
	641366.871	1343487.611	12° 9' 0.319" N	61° 42' 2.723" W	385.71	60.33
	640361.733	1345491.113	12° 10' 5.683" N	61° 42' 35.659" W	42.86	55.88
	639754.244	1345024.039	12° 9' 50.575" N	61° 42' 55.829" W	128.57	60.37
	639924.849	1345118.304	12° 9' 53.617" N	61° 42' 50.170" W	133.93	48.36
	641436.150	1344856.232	12° 9' 44.853" N	61° 42' 0.215" W	30.00	59.62
	640960.590	1345002.069	12° 9' 49.673" N	61° 42' 15.924" W	0.54	51.32
St. John	636646.655	1333516.332	12° 3' 36.494" N	61° 44' 40.386" W	492.86	65.50
	636701.198	1333314.490	12° 3' 29.916" N	61° 44' 38.612" W	4.29	54.00
	636277.512	1333257.988	12° 3' 28.140" N	61° 44' 52.632" W	8.57	51.50
	636014.159	1333356.884	12° 3' 31.398" N	61° 45' 1.326" W	117.86	63.50
	636649.060	1333437.718	12° 3' 33.935" N	61° 44' 40.318" W	85.71	51.00
	636518.673	1333028.717	12° 3' 20.642" N	61° 44' 44.692" W	182.14	52.50
	637108.318	1333576.373	12° 3' 38.379" N	61° 44' 25.109" W	75.00	46.00
	639248.928	1333330.599	12° 3' 30.057" N	61° 43' 14.358" W	278.57	56.50
	639314.199	1333246.473	12° 3' 27.309" N	61° 43' 12.213" W	21.43	58.00
	639243.775	1333193.165	12° 3' 25.585" N	61° 43' 14.550" W	85.71	71.00
	639281.733	1333546.730	12° 3' 37.087" N	61° 43' 13.240" W	300.00	62.50

Location	Coordinate				Hydraulic Conductivity (mm/hr)	Porosity (%)
	UTM X	UTM Y	Latitude	Longitude		
	637043.748	1334081.450	12° 3' 54.828" N	61° 44' 27.168" W	42.86	49.50
	636862.119	1333578.450	12° 3' 38.483" N	61° 44' 33.251" W	15.00	44.00
	636283.257	1333827.464	12° 3' 46.675" N	61° 44' 52.356" W	364.29	55.65
	637683.183	1333008.976	12° 3' 19.825" N	61° 44' 6.185" W	5.36	55.52
	636935.890	1333855.320	12° 3' 47.484" N	61° 44' 30.769" W	48.21	63.02
	638466.329	1334987.063	12° 4' 24.090" N	61° 43' 39.984" W	428.57	60.38
	639977.776	1335302.530	12° 4' 34.128" N	61° 42' 49.950" W	321.43	67.81
	640022.999	1335623.817	12° 4' 44.578" N	61° 42' 48.405" W	214.29	65.86
	636665.250	1333353.128	12° 3' 31.179" N	61° 44' 39.795" W	257.14	51.50
	639932.480	1335608.705	12° 4' 44.100" N	61° 42' 51.400" W	21.43	65.53
	640071.210	1335139.671	12° 4' 28.813" N	61° 42' 46.885" W	85.71	60.15
	639452.939	1335400.887	12° 4' 37.409" N	61° 43' 7.292" W	10.71	61.65
	638484.334	1335043.998	12° 4' 25.940" N	61° 43' 39.380" W	85.71	56.42
	637328.774	1334594.459	12° 4' 11.483" N	61° 44' 17.664" W	107.14	57.89
	638240.645	1334749.687	12° 4' 16.398" N	61° 43' 47.484" W	2.14	52.44
	636216.469	1333899.476	12° 3' 49.028" N	61° 44' 54.554" W	117.86	57.66
	637278.260	1334898.798	12° 4' 21.396" N	61° 44' 19.288" W	19.29	61.00
	637404.864	1334417.657	12° 4' 5.717" N	61° 44' 15.175" W	69.64	58.96
	638191.807	1334432.040	12° 4' 6.067" N	61° 43' 49.148" W	64.29	62.00
	639202.187	1334678.949	12° 4' 13.950" N	61° 43' 15.696" W	37.50	59.62
	637739.456	1332645.251	12° 3' 7.978" N	61° 44' 4.380" W	75.00	48.82
	637496.909	1332794.059	12° 3' 12.858" N	61° 44' 12.378" W	2.14	52.47
	638478.398	1333872.652	12° 3' 47.816" N	61° 43' 39.756" W	26.79	57.67
	637618.533	1333835.934	12° 3' 46.751" N	61° 44' 8.197" W	471.43	50.21
	638187.941	1334416.703	12° 4' 5.568" N	61° 43' 49.278" W	42.86	60.50
	637120.262	1333539.743	12° 3' 37.185" N	61° 44' 24.720" W	278.57	53.51
	637723.388	1332667.169	12° 3' 8.694" N	61° 44' 4.908" W	10.71	55.72
	637827.618	1333985.148	12° 3' 51.576" N	61° 44' 1.260" W	257.14	47.87
	639010.644	1333539.917	12° 3' 36.906" N	61° 43' 22.206" W	42.86	70.32
	638749.038	1334137.226	12° 3' 56.387" N	61° 43' 30.765" W	139.29	54.47
	638273.971	1332353.934	12° 2' 58.416" N	61° 43' 46.749" W	192.86	50.33
	638333.407	1332985.492	12° 3' 18.963" N	61° 43' 44.687" W	1.07	56.56
	638654.544	1332890.294	12° 3' 15.816" N	61° 43' 34.082" W	0.21	62.39
	638254.761	1334503.064	12° 4' 8.369" N	61° 43' 47.055" W	428.57	59.00
	636013.712	1333295.680	12° 3' 29.406" N	61° 45' 1.350" W	450.00	49.50
	636214.869	1333347.845	12° 3' 31.074" N	61° 44' 54.690" W	64.29	55.50

Appendix 4

PCRaster script for generating of a LISEM input database (Jetten, 2015)

```
binding
#####
### input maps ###
#####

mask = mask_gou.map;

DEM = dem20_gou.map;
# digital elevation model, area must be <= mask

unitmapbase = landuse_gou.map;
# land use types
soiltype = soil_gou.map;
# Land use type for layer 1
soiltexture = soiltext_gou.map;
# soil texture classes for layer 2

soildepth = soildepth_gou.map;

barriers = barriers_gou.map;
# in m, anything that obstructs flooding: northern bypass, roads, NOT houses
# added to the DEM

road = road_gou.map;
# type 1 = highway, 2 = 2.5 car width is larger, 3 is 1.5 car width

rivers = newmask.map;#chanmask_gou.map;
# river mask
mainout = mainout_gou.map;
# forced outlet rivers to the sea, because of imperfect dem

#levees = chanlevee50m.map;
# height (m) small levees on both sides of the channel, subpixel

culverts = culverts_gou.map;
# location with main culverts

outpointuser = outpoint_gou.map;
# points for user output hydrographs

house_cover0 = house_gou.map;
# housing density fraction (0-1)

hard_surf0 = hardsurf_gou.map;
# hard surfaces (0-1) such as airport, parking lots etc

stones = stone_gou.map;
# no info for grenada

#####
### hydrological data input tables ###
#####

soiltbl2 = Infiltration2_gou.txt; # soil texture class hydro properties
soiltbl = Infiltration_gouT5.txt; # land use class hydro properties
lutbl = landuse_manning_gouT5.txt; # land use surface properties
```

```
#####  
### output LISEM database, default names ###  
#####  
  
# basic topography related maps  
DEMm = dem.map; # adjusted dem  
barriersc = barriers.map;  
Ldd = ldd.map; # Local Drain Direction surface runoff  
grad = grad.map; # slope, sine!  
id = id.map; # pluviograph influence zones  
outlet = outlet.map; # location outlets and checkpoints  
landuse = landunit.map; # land units combined soil and vegetation  
outpoint=outpoint.map; # points where hydrograph output is generated  
  
# impermeable roads, tarmac, concrete  
roadwidth = roadwidth.map; # rad width (m)  
  
# vegetation maps  
coverc= per.map; # cover fraction (-)  
lai= lai.map; # leaf area index (m2/m2) for interception storage  
cropheight= ch.map; # plant height in m, for erosion, not used  
grasswid = grasswid.map; # width of grass strips for infiltration  
  
# Green and AMpt infiltration maps  
ksat1 = ksat1.map; # sat hydraulic conductivity (mm/h)  
pore1 = thetas1.map; # porosity (-)  
thetai1 = thetai1.map; # initial moisture content (-)  
psi1 = psi1.map; # suction unsat zone (cm)  
soildep1 = soildep1.map; # soil depth (mm), assumed constant  
# second layer G&A  
ksat2 = ksat2.map; # sat hydraulic conductivity (mm/h)  
pore2 = thetas2.map; # porosity (-)  
thetai2 = thetai2.map; # initial moisture content (-)  
psi2 = psi2.map; # suction unsat zone (cm)  
soildep2 = soildep2.map; # soil depth (mm), assumed constant  
ksatcomp = ksatcomp.map; # ksat of compacted areas (mm/h)  
  
# surface maps  
rr = rr.map; # surface roughness (cm)  
mann = n.map; # mannings n ()  
stone = stonefrc.map; # stone fraction on surface (-)  
crust = crustfrc.map; # crusted soil (-), not present  
comp = compfrc.map; # compacted soil (-), murrum roads  
hard = hardsurf.map; # impermeable surfaces (0 or 1)  
# erosion maps , not used  
cohsoil = coh.map; # cohesion (kPa)  
cohplant = cohadd.map; # added root cohesion (kPa)  
D50 = d50.map; # median of texture (mu)  
aggrstab = aggrstab.map; # aggregate stability number (-)  
chancoh = chancoh.map; # channel cohesion (kPa)  
  
# channel maps  
lddchan = lddchan.map; # channel 1D network  
chanwidth = chanwidt.map; # channel width (m)  
changrad = changrad.map; # channel gradient, sine  
chanman = chanman.map; # channel manning (-)  
chanside = chanside.map; # angle channel side walls, 0 = rectangular  
  
# channel flooding maps: channels that have a depth > 0 can flood
```

```
# channels with a depth 0 will never flood but are infinitely deep!
chandepth_ = chandepth_.map; # channel depth (m)
chandepth = chandepth.map; # channel depth (m)
chanmaxq = chanmaxq.map; # maximum discharge (m3/s) in culvert locations in channel
chanlevees = chanlevee.map; # main levees along channels
chanksat = chanksat.map; # ksat in case channel infiltrates, for dry channels
floodzone = floodzone.map; # flooding limited to areas with value 1

# houses
housecov = housecover.map; # house cover fraction
roofstore = roofstore.map; # roof interception (mm) \
raindrumsize = scalar(0); # raindrum size (m3)
drumstore = drumstore.map; # locations of rainwater harvesting in drums (0/1)
baresoil = baresoil.map; # not used in lisem, for reference
initial

# limited all maps to mask extent
unitmap = scalar(unitmapbase)*mask;
soils = scalar(soiltype)*mask;
soils2 = scalar(soiltexture)*mask;
DEM *= mask;
chanm = if(cover(rivers,0) > 0,1,0)*mask;

#####
### LAND COVER MAP ###
#####

report landuse = unitmap;

#####
### BASE RELIEF MAPS ###
#####
report barriersc = barriers;

#report barriersc = if(scenario eq 0, 0, barriersc);
# no barrier when channel = culvert

report DEMm = DEM * 1;
DEMm = DEM + barriersc;
# large barriers, for instance dike near airport

report Ldd = lddcreate (DEMm-chanm*10-mainout*10, $1, $1, $1, $1);
# report ldd_gou.map = lddn.map;
# runoff flow network based on dem, main outlet, channels and barriers
report outlet = pit(Ldd);

report grad = max(sin(atan(slope((DEMm))))), 0.005)*mask;
#### not used in lisem, auxilary maps
report ups_gou.map=accuflux(Ldd,1);
report ws.map=catchment(Ldd, pit(Ldd));
asp = scalar( aspect(DEMm));
shade = cos(15)*sin(grad)*cos(asp+45) + sin(15)*cos(grad);
report shade.map = (shade-mapminimum(shade))/(mapmaximum(shade)-mapminimum(shade));
#### not used in lisem

#####
### MAPS WITH RAINFALL INFLUENCE ZONE ###
#####
report id = nominal(mask);
# rainfall zone. homogeneous map for hazards
```

```
#####  
### VEGETATION MAPS ###  
#####  
report coverc = lookupscalar(lutbl, 3, nominal(unitmap)) * mask;  
# fraction plant soil cover  
  
# LAI of plants inside gridcell (m2/m2)  
coverc = min(coverc, 0.95);  
# lai = ln(1-coverc)/-0.4;  
report lai = lookupscalar(lutbl, 5, nominal(unitmap)) * mask;  
  
#####  
### HOUSE MAPS ###  
#####  
  
report housecov=house_cover0*mask;  
# copy directly input  
report roofstore = if(housecov gt 0,1,0)*mask;  
# interception storage 1 mm  
report drumstore.map=if(housecov gt 0,raindrumsize,0)*mask;  
# possible water rain drum at home in m3  
  
#####  
### INFILTRATION MAPS for option two layer GREEN & AMPT ###  
#####  
  
ksat2 = lookupscalar(soiltbl2, 1, soils2) * mask;  
pore2 = lookupscalar(soiltbl2, 2, soils2) * mask;  
# basic values from saxton equations  
  
report psi2 = 30; #lookupscalar(soiltbl, 3, soils) * mask;  
report psi1 = 1.5*psi2;  
  
soildep2 = soildepth *mask;  
soildep1 = min(soildepth/2, 150);  
report soildep2 = if (soils eq 23, 10, soildep2);  
report soildep1 = if (soils eq 23, 5, soildep1);  
  
report stone = mask*max(0,stones-1)/100*2;  
# stone fraction influences hydrology, based on class 1 to 7  
  
# natural = unitmap eq 7 or unitmap eq 9 or unitmap eq 10  
# or unitmap eq 12 or unitmap eq 13 or unitmap eq 14;  
# land cover types that have a natural soil  
  
report ksat1 = lookupscalar(soiltbl, 1, soils) * mask ;  
report pore1 = lookupscalar(soiltbl, 2, soils) * mask;  
# basic values from observation/fieldwork  
  
# report ksat1 = if(natural,max(200, 2*ksat2),ksat2);  
# report pore1 = if(natural,0.56,pore2);  
# top soil is very open under natural systems  
  
report ksat2 *= (1-stone);  
report pore2 *= (1-stone);  
# subsoil is less permeable with stones, less porosity  
report theta2 = 0.8*pore2;  
report theta1 = 0.9*pore1;  
# initial moisture as 80 - 90% of porosity
```

```
#####  
### SOIL SURFACE MAPS ###  
#####  
report rr = max(lookupscalar(lutbl, 2, nominal(unitmap)) * mask, 0.01);  
# micro relief, random roughness (=std dev in cm)  
report mann = lookupscalar(lutbl, 1, nominal(unitmap)) * mask;  
# in the lisem code Manning's n is increased with house effect  
  
report crust = mask*0;  
# crust fraction assumed zero  
report comp = 0*mask;#if (road eq 1 or road eq 5, 0.2, 0)*mask;  
#fraction compacted, e.g. dirt roads  
report ksatcomp = 0.1*mask; # 0.1 mm/h over width of dirt road  
report hard = hard_surf0;  
#hard surface, here airports and large impenetrable areas  
  
report roadwidth = if (road eq 1, 8, if(road eq 2, 6, if(road eq 3, 4, 0)))*mask;  
# width tarred roads in m  
#####  
### CHANNEL MAPS ###  
#####  
  
chanmask = if(rivers ne 0,1)*mask;  
# create missing value outside channel  
report lddchan = lddcreate((DEMm-mainout*100)*chanmask,1e20,1e20,1e20,1e20);  
# create a channel network  
report outpoint = cover(scalar(pit(lddchan)),mask*0);  
  
changrad = max(0.01,sin(atan(slope(chanmask*DEMm))));  
report changrad = windowaverage(changrad, 5*celllength()*mask;  
# channel slope, copy surface but smooth to avoid abrupt changes  
  
report chanman = chanmask*0.065;  
# fairly rough and rocky channel beds  
report chanside = chanmask*scalar(0);  
# rectangular channel  
  
# chanwidth = max(3.0, min(15.0, accuflux(lddchan, 1)/20));  
report chanwidth = if (rivers eq 1, 12, if(rivers eq 2, 10, if(rivers eq 3, 8, if(rivers eq 4, 12, if(rivers eq 5, 4, if(rivers eq 6, 15, 0)))))*mask;  
culvert_fraction_width = 0.8;  
# report chanwidth = if(culverts gt 0, chanwidth*culvert_fraction_width, chanwidth);  
# channel width is 15m at outlet and becoming less away form the coast to 3 m  
chandepth_ = soildepth/2000*chanmask + min(1.0, max(0.4, accuflux(lddchan, 1)/100));  
# channel depth approx 2.8m at outlet to < 1 m at start bbranch  
  
report chandepth = if(newmask.map eq 1, chandepth_ -0.5, if(newmask.map eq 2, chandepth_ -0.2, if(newmask.map eq 3, chandepth_ -0.3, if(newmask.map eq 6, chandepth_ -0.6,chandepth_)));  
# channel depth approx 2.8m at outlet to < 1 m at start bbranch  
  
report chanmaxq = 0*mask;  
report chanksat = 0*mask;  
# assume rocky channel or some baseflow so no extra infiltration  
report chanlevees = 0*mask;  
# no known levees  
  
floodzone = scalar(spread(rivers ne 0, 0, DEMm) le 7000) ;  
report floodzone = mask; #windowmaximum(floodzone, 3*celllength());  
# max floodzones based on a geomorphological factor
```

```
#####  
### EROSION MAPS ###  
#####  
# some default values  
report D50 = 20 * mask; # fine material  
report cohsoil = 8 * mask; # strong clay aggregates  
report cohplant = coverc * 4 * mask; # additional plant root strength  
report aggrstab = 12 * mask; # aggregate stability  
report chancoh = 20 * chanmask; # strong channels?  
report cropheight = lookupscalar(lutbl, 4, nominal(unitmap)) * mask; #plant height in m
```